

ALTERNATIVE PROGRAM

Product catalogue 2019-2021






OMEGA AIR d.o.o. Ljubljana
Cesta Dolomitskega odreda 10
SI-1000 Ljubljana, Slovenia

T +386 (0)1 200 68 00
F +386 (0)1 200 68 50
info@omega-air.si
www.omega-air.si

GPS: 46°2'27.13" 14°27'59.46"

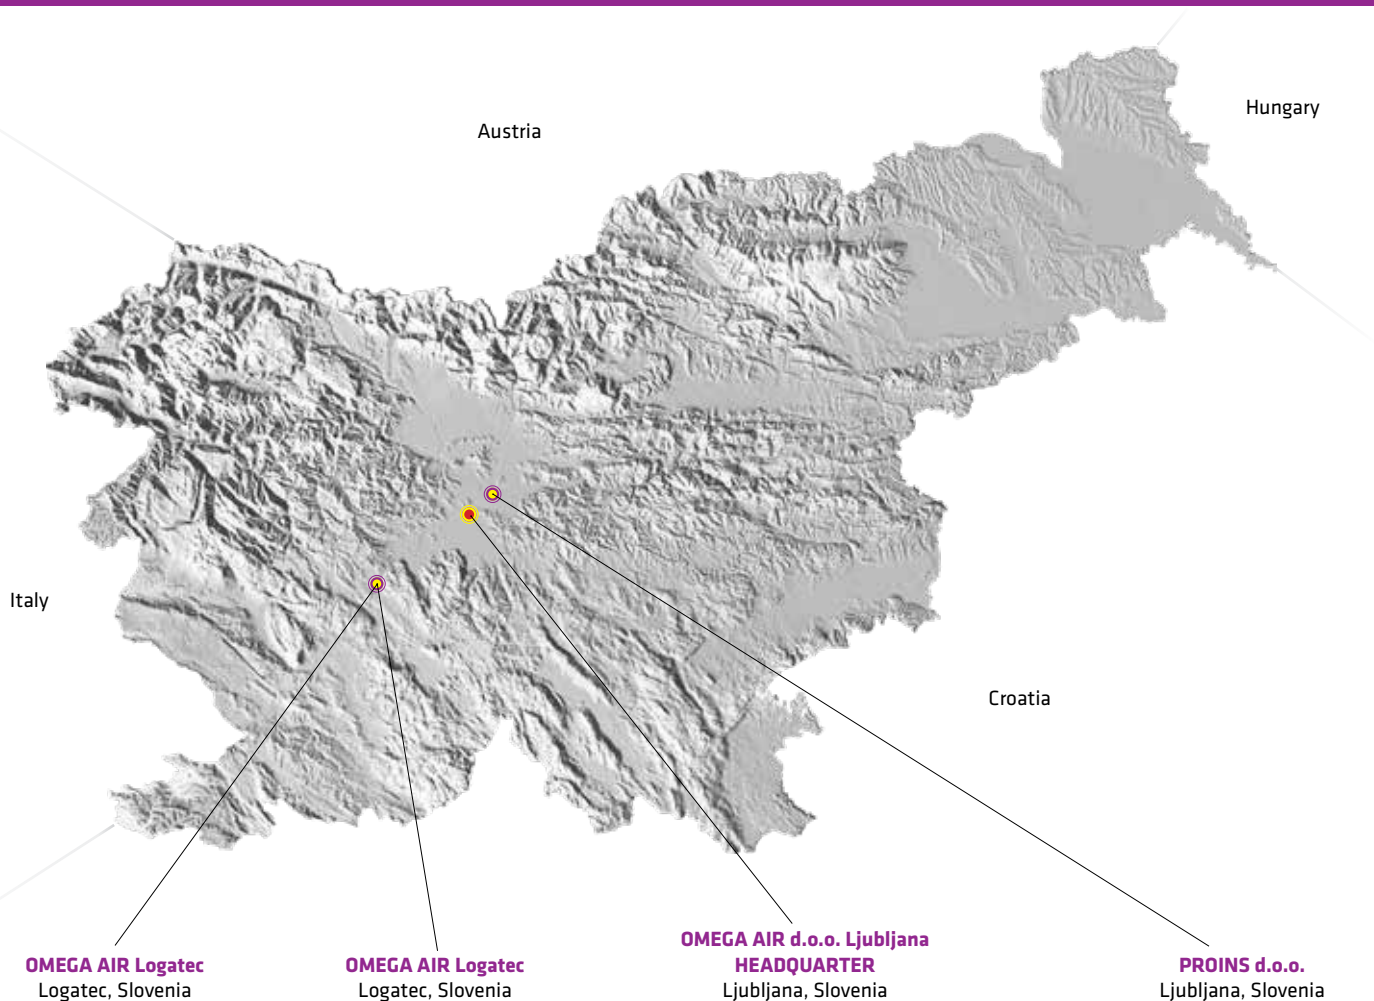

Main warehouse
Area: 4000 m²



Compressors and technique dept.
Service centre
Welding department
Dryers production
Land: 31.500 m²
Facilities: 4.100 m²




Head office
Production halls
Sales office
R & D
Area: 6.600 m²

proINS
Napredne inštalacije

Mechanical installations

OMEGA AIR

Air and Gas

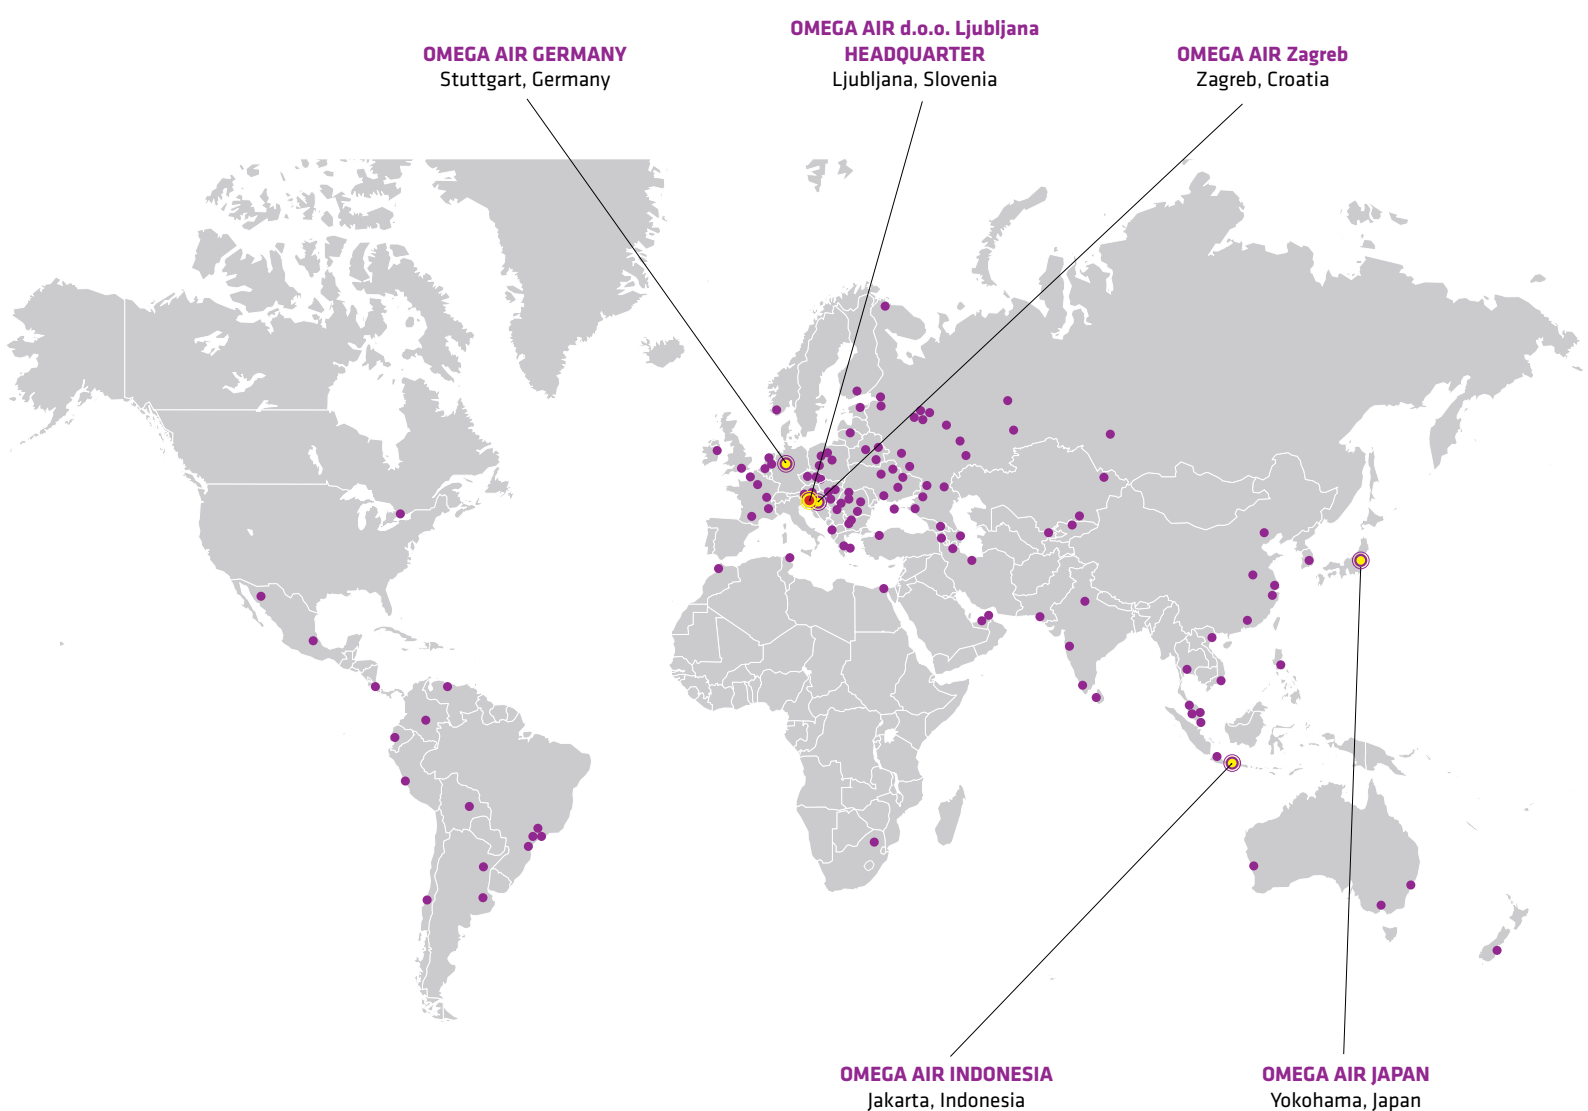

- OMEGA AIR Headquarter
- OMEGA AIR Subsidiary/ Representative office
- OMEGA AIR Customers



Table of contents

ALTERNATIVE FILTER ELEMENTS

- | | | | | | |
|----|--|----|--|----|--|
| 6 | ABAC (new)
plastic end caps | 31 | BOGE
plastic end caps | 60 | DONALDSON
silicone and grease free aluminium end cap |
| 7 | ABAC (old)
plastic end caps | 32 | CECCATO (new)
plastic end caps | | <i>Alternative sterile/vent filter elements</i> |
| 8 | AGRE (new)
plastic end caps | 33 | CECCATO (old)
plastic end caps | 62 | DONALDSON
stainless steel end caps 1.4301 (304) |
| 9 | AGRE (old)
plastic end caps | 34 | CHICHAGO PNEUMATIC (new)
plastic end caps | | <i>Alternative process filter elements</i> |
| 10 | AIRFILTER ENGINEERING D
plastic end caps | 35 | CHICHAGO PNEUMATIC (old)
plastic end caps | 66 | DONALDSON
stainless steel end caps 1.4301 (304) |
| 11 | AIRFILTER ENGINEERING
plastic end caps | 36 | CKD (AF1000)
plastic end caps | 68 | EKOMAK
plastic end caps |
| 12 | AIRFILTER ENGINEERING
aluminium end caps | 37 | CKD (AF2000)
plastic end caps | 69 | EKOMAK
aluminium end caps |
| 13 | ALMIG
plastic end caps | 38 | COMPAIR
plastic end caps | 70 | FIAC
plastic end caps |
| 14 | ALUP (new)
plastic end caps | 39 | COMPAIR (previous)
plastic end caps | 71 | FINITE J
aluminium end caps |
| 15 | ALUP (previous)
plastic end caps | 40 | COMPAIR (previous)
aluminium end caps | 72 | FINITE (old)
aluminium end caps |
| 16 | ALUP (old)
plastic end caps | 41 | DELTECH 300
plastic end caps | 74 | FUSHENG (new)
plastic end caps |
| 17 | ATLAS COPCO +
plastic end caps | 42 | DELTECH
aluminium end caps | 75 | FUSHENG (old)
plastic end caps |
| 18 | ATLAS COPCO
plastic end caps | 43 | DOMNICK HUNTER oil-x evolution
plastic end caps | 76 | FUSHENG (old)
aluminium end caps |
| 19 | ATLAS COPCO
aluminium end caps | 44 | DOMNICK HUNTER oil-x plus
plastic end caps | 77 | HANKISON NGF
plastic end caps |
| 20 | ATLAS COPCO (old)
plastic end caps | 46 | DOMNICK HUNTER oil-x plus
aluminium end caps | 78 | HANKISON
plastic end caps |
| 21 | ATLAS COPCO (old)
aluminium end caps | 48 | DOMNICK HUNTER HT
aluminium end caps | 79 | HANKISON
aluminium end caps |
| 22 | ATS
aluminium end caps | 49 | DOMNICK HUNTER NH3
aluminium end caps | 81 | HIROSS (new)
plastic end caps |
| 23 | BALMA
plastic end caps | 50 | DONALDSON DF
plastic end caps | 82 | HIROSS (new)
aluminium end caps |
| 24 | BEA ARS
aluminium end caps | 52 | DONALDSON 90' series
plastic end caps | 83 | HIROSS (old)
plastic end caps |
| 26 | BEA ARV
aluminium end caps | 54 | DONALDSON 90' series
aluminium end caps | 84 | HIROSS (old)
aluminium end caps |
| 27 | BEA BST
aluminium end caps | 56 | DONALDSON 80' series
aluminium end caps | 85 | HITACHI
aluminium end caps |
| 28 | BEKO
plastic end caps | | <i>Alternative silicone and grease free filter elements</i> | 86 | INGERSOLL RAND
plastic end caps |
| 30 | BOGE HP
plastic end caps | 58 | DONALDSON
silicone and grease free plastic end cap | 87 | INGERSOLL RAND F
plastic end caps |
| | | | | 88 | INGERSOLL RAND FA
plastic end caps |



ALTERNATIVE FILTER HOUSINGS

- 136 **DONALDSON**
136 **DOMNICK HUNTER**

ALTERNATIVE WATER/OIL SEPARATOR ELEMENTS

- 138 **JORC**
(Boge)
138 **BEKO**
(Atlas Copco, Kaeser, Ecoair, Schnider)
138 **WORTMANN**
(Zander, Kaeser, Hankinson)
139 **DOMNICK HUNTER**
(Hiross, Zander, Hiross, Compair, INGERSOLL RAND)
139 **DONALDSON**
(Almig, Gardner Denver)
139 **KAESER**
140 **ATLAS COPCO**
(Alup, Abac)
140 **OMI**
(Devair)

ALTERNATIVE DESSICANT DRYERS CARTRIDGES

- 141 **DONALDSON**
Ultracac 2000

ALTERNATIVE DRYER SERVICE KITS

- 142 **HANKISON**

- 89 **KAESER (old)**
aluminium end caps
90 **KAESER HP**
aluminium end caps
92 **KNOCKS**
aluminium end caps
93 **KOBELCO**
plastic end caps
94 **KSI**
plastic end caps
95 **MARK (new)**
plastic end caps
96 **MARK (old)**
plastic end caps
97 **MATTEI OMAT**
plastic end caps
98 **MAUGUIERE (new)**
plastic end caps
99 **MAUGUIERE (old)**
plastic end caps
100 **MIKROPOR G**
aluminium end caps
101 **MIKROPOR GO**
aluminium end caps
102 **OMI ALps**
plastic end caps
103 **OMI (old)**
plastic end caps
104 **ORION (new)**
plastic end caps
105 **ORION (new)**
aluminium end caps
106 **ORION F (previous)**
aluminium end caps
107 **PNEUMATECH (new)**
plastic end caps
108 **PNEUMATECH (old)**
plastic end caps
109 **PREVOST MICRO**
plastic end caps
110 **PREVOST**
aluminium end caps
111 **PUSKA (new)**
plastic end caps
112 **PUSKA (old)**
plastic end caps
113 **SCHNEIDER**
plastic end caps
114 **SMC**
plastic end caps
115 **SMC**
aluminium end caps
116 **SPX NGF**
plastic end caps
117 **SULLAIR**
plastic end caps
118 **WALKER OWA ALfa**
plastic end caps
119 **WALKER OWA 20HP & 50HP**
aluminium end caps
120 **WALKER**
aluminium end caps
121 **WALKER HP**
aluminium end caps
122 **WALKER 20HP & 50HP**
aluminium end caps
124 **WORTHINGTON CREYSSENSAC (new)**
plastic end caps
125 **WORTHINGTON CREYSSENSAC (old)**
plastic end caps
126 **ZANDER GL**
plastic end caps
127 **ZANDER**
plastic end caps
128 **ZANDER**
aluminium end caps
Alternative sterile/vent filter elements
129 **ZANDER**
stainless steel end caps 1.4301 (304)
Alternative process filter elements
130 **ZANDER**
stainless steel end caps 1.4301 (304)
132 **ZONDER**
plastic end caps


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

ABAC (new)

	P	G	C	V
ABAC (new) Plastic end caps				
Particle retention	1 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	3	2	1	1*
Oils -q. class (ISO 8573-1)	-	2	1	1
Filter media	borosilicate micro fibres			activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	20	50	80	60

	P		G		C		V	
	ABAC	OMEGA AIR	ABAC	OMEGA AIR	ABAC	OMEGA AIR	ABAC	OMEGA AIR
FILTER 45		OAB 45 P/R	FILTER 45	OAB 45 G/M	FILTER 45	OAB 45 C/S	FILTER 45	OAB 45 V/A
FILTER 90		OAB 90 P/R	FILTER 90	OAB 90 G/M	FILTER 90	OAB 90 C/S	FILTER 90	OAB 90 V/A
FILTER 125		OAB 125 P/R	FILTER 125	OAB 125 G/M	FILTER 125	OAB 125 C/S	FILTER 125	OAB 125 V/A
FILTER 180		OAB 180 P/R	FILTER 180	OAB 180 G/M	FILTER 180	OAB 180 C/S	FILTER 180	OAB 180 V/A
FILTER 290		OAB 290 P/R	FILTER 290	OAB 290 G/M	FILTER 290	OAB 290 C/S	FILTER 290	OAB 290 V/A
FILTER 505		OAB 505 P/R	FILTER 505	OAB 505 G/M	FILTER 505	OAB 505 C/S	FILTER 505	OAB 505 V/A
FILTER 685		OAB 685 P/R	FILTER 685	OAB 685 G/M	FILTER 685	OAB 685 C/S	FILTER 685	OAB 685 V/A
FILTER 935		OAB 935 P/R	FILTER 935	OAB 935 G/M	FILTER 935	OAB 935 C/S	FILTER 935	OAB 935 V/A
FILTER 1295		OAB 1295 P/R	FILTER 1295	OAB 1295 G/M	FILTER 1295	OAB 1295 C/S	FILTER 1295	OAB 1295 V/A
FILTER 1890		OAB 1890 P/R	FILTER 1890	OAB 1890 G/M	FILTER 1890	OAB 1890 C/S	FILTER 1890	OAB 1890 V/A
FILTER 2430		OAB 2430 P/R	FILTER 2430	OAB 2430 G/M	FILTER 2430	OAB 2430 C/S	FILTER 2430	OAB 2430 V/A

* Valid if "S" filter cartridge is installed upstream.



ALTERNATIVE FILTER ELEMENTS

ABAC (old)

	MBP	MBM	MBS	MBA
ABAC (old) Plastic end caps				
Particle retention	3 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	2	1	1*
Oils - q. class (ISO 8573-1)	-	2	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	50	80	60

	MBP		MBM		MBS		MBA	
	ABAC	OMEGA AIR	ABAC	OMEGA AIR	ABAC	OMEGA AIR	ABAC	OMEGA AIR
MBP 60		OAB 60 MBP/P	MBM 60	OAB 60 MBM/M	MBS 60	OAB 60 MBS/S	MBA 60	OAB 60 MBA/A
MBP 80		OAB 80 MBP/P	MBM 80	OAB 80 MBM/M	MBS 80	OAB 80 MBS/S	MBA 80	OAB 80 MBA/A
MBP 120		OAB 120 MBP/P	MBM 120	OAB 120 MBM/M	MBS 120	OAB 120 MBS/S	MBA 120	OAB 120 MBA/A
MBP 200		OAB 200 MBP/P	MBM 200	OAB 200 MBM/M	MBS 200	OAB 200 MBS/S	MBA 200	OAB 200 MBA/A
MBP 340		OAB 340 MBP/P	MBM 340	OAB 340 MBM/M	MBS 340	OAB 340 MBS/S	MBA 340	OAB 340 MBA/A
MBP 510		OAB 510 MBP/P	MBM 510	OAB 510 MBM/M	MBS 510	OAB 510 MBS/S	MBA 510	OAB 510 MBA/A
MBP 800		OAB 800 MBP/P	MBM 800	OAB 800 MBM/M	MBS 800	OAB 800 MBS/S	MBA 800	OAB 800 MBA/A
MBP 1000		OAB 1000 MBP/P	MBM 1000	OAB 1000 MBM/M	MBS 1000	OAB 1000 MBS/S	MBA 1000	OAB 1000 MBA/A
MBP 1500		OAB 1500 MBP/P	MBM 1500	OAB 1500 MBM/M	MBS 1500	OAB 1500 MBS/S	MBA 1500	OAB 1500 MBA/A
MBP 2400		OAB 2400 MBP/P	MBM 2400	OAB 2400 MBM/M	MBS 2400	OAB 2400 MBS/S	MBA 2400	OAB 2400 MBA/A

* Valid if "S" filter cartridge is installed upstream.


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

AGRE [new]

	P	G	C	V
AGRE Plastic end caps				
Particle retention	1 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	3	2	1	1*
Oils -q. class (ISO 8573-1)	-	2	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	20	50	80	60

	P		G		C		V	
	AGRE	OMEGA AIR	AGRE	OMEGA AIR	AGRE	OMEGA AIR	AGRE	OMEGA AIR
	P 45	OAG 45 P/R	G 45; S 45	OAG 45 G/M	D 45; C 45	OAG 45 C/S	V 45	OAG 45 V/A
	P 90	OAG 90 P/R	G 90; S 90	OAG 90 G/M	D 90; C 90	OAG 90 C/S	V 90	OAG 90 V/A
	P 125	OAG 125 P/R	G 125; S 125	OAG 125 G/M	D 125; C 125	OAG 125 C/S	V 125	OAG 125 V/A
	P 180	OAG 180 P/R	G 180; S 180	OAG 180 G/M	D 180; C 180	OAG 180 C/S	V 180	OAG 180 V/A
	P 290	OAG 290 P/R	G 290; S 290	OAG 290 G/M	D 290; C 290	OAG 290 C/S	V 290	OAG 290 V/A

* Valid if "S" filter cartridge is installed upstream.



ALTERNATIVE FILTER ELEMENTS

AGRE (old)

	MBP	MBM	MBS	MBA
AGRE Plastic end caps				
Particle retention	3 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	2	1	1*
Oils -q. class (ISO 8573-1)	-	2	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	50	80	60

	MBP		MBM		MBS		MBA	
	AGRE	OMEGA AIR	AGRE	OMEGA AIR	AGRE	OMEGA AIR	AGRE	OMEGA AIR
MBP 60		OAG 60 MBP/P	MBM 60	OAG 60 MBM/M	MBS 60	OAG 60 MBS/S	MBA 60	OAG 60 MBA/A
MBP 80		OAG 80 MBP/P	MBM 80	OAG 80 MBM/M	MBS 80	OAG 80 MBS/S	MBA 80	OAG 80 MBA/A
MBP 120		OAG 120 MBP/P	MBM 120	OAG 120 MBM/M	MBS 120	OAG 120 MBS/S	MBA 120	OAG 120 MBA/A
MBP 200		OAG 200 MBP/P	MBM 200	OAG 200 MBM/M	MBS 200	OAG 200 MBS/S	MBA 200	OAG 200 MBA/A
MBP 340		OAG 340 MBP/P	MBM 340	OAG 340 MBM/M	MBS 340	OAG 340 MBS/S	MBA 340	OAG 340 MBA/A
MBP 510		OAG 510 MBP/P	MBM 510	OAG 510 MBM/M	MBS 510	OAG 510 MBS/S	MBA 510	OAG 510 MBA/A
MBP 800		OAG 800 MBP/P	MBM 800	OAG 800 MBM/M	MBS 800	OAG 800 MBS/S	MBA 800	OAG 800 MBA/A
MBP 1000		OAG 1000 MBP/P	MBM 1000	OAG 1000 MBM/M	MBS 1000	OAG 1000 MBS/S	MBA 1000	OAG 1000 MBA/A
MBP 1500		OAG 1500 MBP/P	MBM 1500	OAG 1500 MBM/M	MBS 1500	OAG 1500 MBS/S	MBA 1500	OAG 1500 MBA/A
MBP 2400		OAG 2400 MBP/P	MBM 2400	OAG 2400 MBM/M	MBS 2400	OAG 2400 MBS/S	MBA 2400	OAG 2400 MBA/A

* Valid if "S" filter cartridge is installed upstream.


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

AIRFILTER ENGINEERING D

	P	U	H	S	C
AIRFILTER ENGINEERING D Plastic end caps					
Particle retention	3 µm	1 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	3	2	1	1*
Oils - q. class (ISO 8573-1)	-	-	2	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres			activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	20	50	80	60

	P		U		H		S		C	
	AIRFILTER ENGINEERING	OMEGA AIR	AIRFILTER ENGINEERING	OMEGA AIR	AIRFILTER ENGINEERING	OMEGA AIR	AIRFILTER ENGINEERING	OMEGA AIR	AIRFILTER ENGINEERING	OMEGA AIR
	EDA02 P	OAFE D 02 P/P	EDA02 U	OAFE D 02 U/R	EDA02 H	OAFE D 02 H/M	EDA02 S	OAFE D 02 S/S	EDA02 C	OAFE D 02 C/A
	EDA04 P	OAFE D 04 P/P	EDA04 U	OAFE D 04 U/R	EDA04 H	OAFE D 04 H/M	EDA04 S	OAFE D 04 S/S	EDA04 C	OAFE D 04 C/A
	EDA06 P	OAFE D 06 P/P	EDA06 U	OAFE D 06 U/R	EDA06 H	OAFE D 06 H/M	EDA06 S	OAFE D 06 S/S	EDA06 C	OAFE D 06 C/A
	EDA08 P	OAFE D 08 P/P	EDA08 U	OAFE D 08 U/R	EDA08 H	OAFE D 08 H/M	EDA08 S	OAFE D 08 S/S	EDA08 C	OAFE D 08 C/A
	EDA10 P	OAFE D 10 P/P	EDA10 U	OAFE D 10 U/R	EDA10 H	OAFE D 10 H/M	EDA10 S	OAFE D 10 S/S	EDA10 C	OAFE D 10 C/A
	EDA12 P	OAFE D 12 P/P	EDA12 U	OAFE D 12 U/R	EDA12 H	OAFE D 12 H/M	EDA12 S	OAFE D 12 S/S	EDA12 C	OAFE D 12 C/A
	EDA14 P	OAFE D 14 P/P	EDA14 U	OAFE D 14 U/R	EDA14 H	OAFE D 14 H/M	EDA14 S	OAFE D 14 S/S	EDA14 C	OAFE D 14 C/A
	EDA16 P	OAFE D 16 P/P	EDA16 U	OAFE D 16 U/R	EDA16 H	OAFE D 16 H/M	EDA16 S	OAFE D 16 S/S	EDA16 C	OAFE D 16 C/A
	EDA20 P	OAFE D 20 P/P	EDA20 U	OAFE D 20 U/R	EDA20 H	OAFE D 20 H/M	EDA20 S	OAFE D 20 S/S	EDA20 C	OAFE D 20 C/A
	EDA22 P	OAFE D 22 P/P	EDA22 U	OAFE D 22 U/R	EDA22 H	OAFE D 22 H/M	EDA22 S	OAFE D 22 S/S	EDA22 C	OAFE D 22 C/A
	EDA24 P	OAFE D 24 P/P	EDA24 U	OAFE D 24 U/R	EDA24 H	OAFE D 24 H/M	EDA24 S	OAFE D 24 S/S	EDA24 C	OAFE D 24 C/A
	EDA26 P	OAFE D 26 P/P	EDA26 U	OAFE D 26 U/R	EDA26 H	OAFE D 26 H/M	EDA26 S	OAFE D 26 S/S	EDA26 C	OAFE D 26 C/A
	EDA30 P	OAFE D 30 P/P	EDA30 U	OAFE D 30 U/R	EDA30 H	OAFE D 30 H/M	EDA30 S	OAFE D 30 S/S	EDA30 C	OAFE D 30 C/A
	EDA32 P	OAFE D 32 P/P	EDA32 U	OAFE D 32 U/R	EDA32 H	OAFE D 32 H/M	EDA32 S	OAFE D 32 S/S	EDA32 C	OAFE D 32 C/A

* Valid if "S" filter cartridge is installed upstream.



ALTERNATIVE FILTER ELEMENTS

AIRFILTER ENGINEERING

AIRFILTER ENGINEERING Plastic end caps	P	U	H	S	C
					
Particle retention	3 µm	1 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	3	2	1	1*
Oils - q. class (ISO 8573-1)	-	-	2	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres			activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	20	50	80	60

	P		U		H		S		C	
	AIRFILTER ENGINEERING	OMEGA AIR	AIRFILTER ENGINEERING	OMEGA AIR	AIRFILTER ENGINEERING	OMEGA AIR	AIRFILTER ENGINEERING	OMEGA AIR	AIRFILTER ENGINEERING	OMEGA AIR
	EA10 P	OAFE EA10 P/P	EA10 U	OAFE EA10 U/R	EA10 H	OAFE EA10 H/M	EA10 S	OAFE EA10 S/S	EA10 C	OAFE EA10 C/A
	EA15 P	OAFE EA15 P/P	EA15 U	OAFE EA15 U/R	EA15 H	OAFE EA15 H/M	EA15 S	OAFE EA15 S/S	EA15 C	OAFE EA15 C/A
	EA20 P	OAFE EA20 P/P	EA20 U	OAFE EA20 U/R	EA20 H	OAFE EA20 H/M	EA20 S	OAFE EA20 S/S	EA20 C	OAFE EA20 C/A
	EA30 P	OAFE EA30 P/P	EA30 U	OAFE EA30 U/R	EA30 H	OAFE EA30 H/M	EA30 S	OAFE EA30 S/S	EA30 C	OAFE EA30 C/A
	EA55 P	OAFE EA55 P/P	EA55 U	OAFE EA55 U/R	EA55 H	OAFE EA55 H/M	EA55 S	OAFE EA55 S/S	EA55 C	OAFE EA55 C/A
	EA95 P	OAFE EA95 P/P	EA95 U	OAFE EA95 U/R	EA95 H	OAFE EA95 H/M	EA95 S	OAFE EA95 S/S	EA95 C	OAFE EA95 C/A
	EA150 P	OAFE EA150 P/P	EA150 U	OAFE EA150 U/R	EA150 H	OAFE EA150 H/M	EA150 S	OAFE EA150 S/S	EA150 C	OAFE EA150 C/A
	EA220 P	OAFE EA220 P/P	EA220 U	OAFE EA220 U/R	EA220 H	OAFE EA220 H/M	EA220 S	OAFE EA220 S/S	EA220 C	OAFE EA220 C/A
	EA290 P	OAFE EA290 P/P	EA290 U	OAFE EA290 U/R	EA290 H	OAFE EA290 H/M	EA290 S	OAFE EA290 S/S	EA290 C	OAFE EA290 C/A
	EA430 P	OAFE EA430 P/P	EA430 U	OAFE EA430 U/R	EA430 H	OAFE EA430 H/M	EA430 S	OAFE EA430 S/S	EA430 C	OAFE EA430 C/A
	EA625 P	OAFE EA625 P/P	EA625 U	OAFE EA625 U/R	EA625 H	OAFE EA625 H/M	EA625 S	OAFE EA625 S/S	EA625 C	OAFE EA625 C/A
	EA775 P	OAFE EA775 P/P	EA775 U	OAFE EA775 U/R	EA775 H	OAFE EA775 H/M	EA775 S	OAFE EA775 S/S	EA775 C	OAFE EA775 C/A

* Valid if "S" filter cartridge is installed upstream.


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

AIRFILTER ENGINEERING

	P	U	H	S	C
AIRFILTER ENGINEERING Aluminium end caps					
Particle retention	3 µm	1 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	3	2	1	1*
Oils -q. class (ISO 8573-1)	-	-	2	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres			activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	20	50	80	60

	P		U		H		S		C	
	AIRFILTER ENGINEERING	OMEGA AIR	AIRFILTER ENGINEERING	OMEGA AIR	AIRFILTER ENGINEERING	OMEGA AIR	AIRFILTER ENGINEERING	OMEGA AIR	AIRFILTER ENGINEERING	OMEGA AIR
	EA10 P	OAFE EA10 P/P AL	EA10 U	OAFE EA10 U/R AL	EA10 H	OAFE EA10 H/M AL	EA10 S	OAFE EA10 S/S AL	EA10 C	OAFE EA10 C/A AL
	EA15 P	OAFE EA15 P/P AL	EA15 U	OAFE EA15 U/R AL	EA15 H	OAFE EA15 H/M AL	EA15 S	OAFE EA15 S/S AL	EA15 C	OAFE EA15 C/A AL
	EA20 P	OAFE EA20 P/P AL	EA20 U	OAFE EA20 U/R AL	EA20 H	OAFE EA20 H/M AL	EA20 S	OAFE EA20 S/S AL	EA20 C	OAFE EA20 C/A AL
	EA30 P	OAFE EA30 P/P AL	EA30 U	OAFE EA30 U/R AL	EA30 H	OAFE EA30 H/M AL	EA30 S	OAFE EA30 S/S AL	EA30 C	OAFE EA30 C/A AL
	EA55 P	OAFE EA55 P/P AL	EA55 U	OAFE EA55 U/R AL	EA55 H	OAFE EA55 H/M AL	EA55 S	OAFE EA55 S/S AL	EA55 C	OAFE EA55 C/A AL
	EA95 P	OAFE EA95 P/P AL	EA95 U	OAFE EA95 U/R AL	EA95 H	OAFE EA95 H/M AL	EA95 S	OAFE EA95 S/S AL	EA95 C	OAFE EA95 C/A AL
	EA150 P	OAFE EA150 P/P AL	EA150 U	OAFE EA150 U/R AL	EA150 H	OAFE EA150 H/M AL	EA150 S	OAFE EA150 S/S AL	EA150 C	OAFE EA150 C/A AL
	EA220 P	OAFE EA220 P/P AL	EA220 U	OAFE EA220 U/R AL	EA220 H	OAFE EA220 H/M AL	EA220 S	OAFE EA220 S/S AL	EA220 C	OAFE EA220 C/A AL
	EA290 P	OAFE EA290 P/P AL	EA290 U	OAFE EA290 U/R AL	EA290 H	OAFE EA290 H/M AL	EA290 S	OAFE EA290 S/S AL	EA290 C	OAFE EA290 C/A AL
	EA430 P	OAFE EA430 P/P AL	EA430 U	OAFE EA430 U/R AL	EA430 H	OAFE EA430 H/M AL	EA430 S	OAFE EA430 S/S AL	EA430 C	OAFE EA430 C/A AL
	EA625 P	OAFE EA625 P/P AL	EA625 U	OAFE EA625 U/R AL	EA625 H	OAFE EA625 H/M AL	EA625 S	OAFE EA625 S/S AL	EA625 C	OAFE EA625 C/A AL
	EA775 P	OAFE EA775 P/P AL	EA775 U	OAFE EA775 U/R AL	EA775 H	OAFE EA775 H/M AL	EA775 S	OAFE EA775 S/S AL	EA775 C	OAFE EA775 C/A AL

* Valid if "S" filter cartridge is installed upstream.



ALTERNATIVE FILTER ELEMENTS

ALMIG

	AFP	AFM	AFS	AFC
ALMIG Plastic end caps				
Particle retention	3 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	2	1	1*
Oils -q. class (ISO 8573-1)	-	2	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	50	80	60

	AFP		AFM		AFS		AFC	
	ALMIG	OMEGA AIR	ALMIG	OMEGA AIR	ALMIG	OMEGA AIR	ALMIG	OMEGA AIR
AFP 30		OALM 30 AFP/P	AFM 30	OALM 30 AFM/M	AFS 30	OALM 30 AFS/S	AFC 30	OALM 30 AFC/A
AFP 60		OALM 60 AFP/P	AFM 60	OALM 60 AFM/M	AFS 60	OALM 60 AFS/S	AFC 60	OALM 60 AFC/A
AFP 108		OALM 108 AFP/P	AFM 108	OALM 108 AFM/M	AFS 108	OALM 108 AFS/S	AFC 108	OALM 108 AFC/A
AFP 180		OALM 180 AFP/P	AFM 180	OALM 180 AFM/M	AFS 180	OALM 180 AFS/S	AFC 180	OALM 180 AFC/A
AFP 204		OALM 204 AFP/P	AFM 204	OALM 204 AFM/M	AFS 204	OALM 204 AFS/S	AFC 204	OALM 204 AFC/A
AFP 300		OALM 300 AFP/P	AFM 300	OALM 300 AFM/M	AFS 300	OALM 300 AFS/S	AFC 300	OALM 300 AFC/A
AFP 432		OALM 432 AFP/P	AFM 432	OALM 432 AFM/M	AFS 432	OALM 432 AFS/S	AFC 432	OALM 432 AFC/A
AFP 570		OALM 570 AFP/P	AFM 570	OALM 570 AFM/M	AFS 570	OALM 570 AFS/S	AFC 570	OALM 570 AFC/A
AFP 750		OALM 750 AFP/P	AFM 750	OALM 750 AFM/M	AFS 750	OALM 750 AFS/S	AFC 750	OALM 750 AFC/A
AFP 990		OALM 990 AFP/P	AFM 990	OALM 990 AFM/M	AFS 990	OALM 990 AFS/S	AFC 990	OALM 990 AFC/A
AFP 1140		OALM 1140 AFP/P	AFM 1140	OALM 1140 AFM/M	AFS 1140	OALM 1140 AFS/S	AFC 1140	OALM 1140 AFC/A
AFP 1320		OALM 1320 AFP/P	AFM 1320	OALM 1320 AFM/M	AFS 1320	OALM 1320 AFS/S	AFC 1320	OALM 1320 AFC/A
AFP 1680		OALM 1680 AFP/P	AFM 1680	OALM 1680 AFM/M	AFS 1680	OALM 1680 AFS/S	AFC 1680	OALM 1680 AFC/A
AFP 2100		OALM 2100 AFP/P	AFM 2100	OALM 2100 AFM/M	AFS 2100	OALM 2100 AFS/S	AFC 2100	OALM 2100 AFC/A
AFP 2640		OALM 2640 AFP/P	AFM 2640	OALM 2640 AFM/M	AFS 2640	OALM 2640 AFS/S	AFC 2640	OALM 2640 AFC/A

* Valid if "S" filter cartridge is installed upstream.


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

ALUP [new]

	P	G	C	V
ALUP (new) Plastic end caps				
Particle retention	1 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	3	2	1	1*
Oils -q. class (ISO 8573-1)	-	2	1	1
Filter media	borosilicate micro fibres			activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	20	50	80	60

	P		G		C		V	
	ALUP	OMEGA AIR	ALUP	OMEGA AIR	ALUP	OMEGA AIR	ALUP	OMEGA AIR
FILTER 45		OALU 45 P/R	FILTER 45	OALU 45 G/M	FILTER 45	OALU 45 C/S	FILTER 45	OALU 45 V/A
FILTER 90		OALU 90 P/R	FILTER 90	OALU 90 G/M	FILTER 90	OALU 90 C/S	FILTER 90	OALU 90 V/A
FILTER 125		OALU 125 P/R	FILTER 125	OALU 125 G/M	FILTER 125	OALU 125 C/S	FILTER 125	OALU 125 V/A
FILTER 180		OALU 180 P/R	FILTER 180	OALU 180 G/M	FILTER 180	OALU 180 C/S	FILTER 180	OALU 180 V/A
FILTER 290		OALU 290 P/R	FILTER 290	OALU 290 G/M	FILTER 290	OALU 290 C/S	FILTER 290	OALU 290 V/A
FILTER 505		OALU 505 P/R	FILTER 505	OALU 505 G/M	FILTER 505	OALU 505 C/S	FILTER 505	OALU 505 V/A
FILTER 685		OALU 685 P/R	FILTER 685	OALU 685 G/M	FILTER 685	OALU 685 C/S	FILTER 685	OALU 685 V/A
FILTER 935		OALU 935 P/R	FILTER 935	OALU 935 G/M	FILTER 935	OALU 935 C/S	FILTER 935	OALU 935 V/A
FILTER 1295		OALU 1295 P/R	FILTER 1295	OALU 1295 G/M	FILTER 1295	OALU 1295 C/S	FILTER 1295	OALU 1295 V/A
FILTER 1890		OALU 1890 P/R	FILTER 1890	OALU 1890 G/M	FILTER 1890	OALU 1890 C/S	FILTER 1890	OALU 1890 V/A
FILTER 2430		OALU 2430 P/R	FILTER 2430	OALU 2430 G/M	FILTER 2430	OALU 2430 C/S	FILTER 2430	OALU 2430 V/A

* Valid if "S" filter cartridge is installed upstream.



ALUP (previous)

	MBP	MBM	MBS	MBA
ALUP (previous) Plastic end caps				
Particle retention	3 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	2	1	1*
Oils -q. class (ISO 8573-1)	-	2	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	50	80	60

	MBP		MBM		MBS		MBA	
	ALUP	OMEGA AIR	ALUP	OMEGA AIR	ALUP	OMEGA AIR	ALUP	OMEGA AIR
MBP 60		OALU 60 MBP/P	MBM 60	OALU 60 MBM/M	MBS 60	OALU 60 MBS/S	MBA 60	OALU 60 MBA/A
MBP 80		OALU 80 MBP/P	MBM 80	OALU 80 MBM/M	MBS 80	OALU 80 MBS/S	MBA 80	OALU 80 MBA/A
MBP 120		OALU 120 MBP/P	MBM 120	OALU 120 MBM/M	MBS 120	OALU 120 MBS/S	MBA 120	OALU 120 MBA/A
MBP 200		OALU 200 MBP/P	MBM 200	OALU 200 MBM/M	MBS 200	OALU 200 MBS/S	MBA 200	OALU 200 MBA/A
MBP 340		OALU 340 MBP/P	MBM 340	OALU 340 MBM/M	MBS 340	OALU 340 MBS/S	MBA 340	OALU 340 MBA/A
MBP 510		OALU 510 MBP/P	MBM 510	OALU 510 MBM/M	MBS 510	OALU 510 MBS/S	MBA 510	OALU 510 MBA/A
MBP 800		OALU 800 MBP/P	MBM 800	OALU 800 MBM/M	MBS 800	OALU 800 MBS/S	MBA 800	OALU 800 MBA/A
MBP 1000		OALU 1000 MBP/P	MBM 1000	OALU 1000 MBM/M	MBS 1000	OALU 1000 MBS/S	MBA 1000	OALU 1000 MBA/A
MBP 1500		OALU 1500 MBP/P	MBM 1500	OALU 1500 MBM/M	MBS 1500	OALU 1500 MBS/S	MBA 1500	OALU 1500 MBA/A
MBP 2400		OALU 2400 MBP/P	MBM 2400	OALU 2400 MBM/M	MBS 2400	OALU 2400 MBS/S	MBA 2400	OALU 2400 MBA/A

* Valid if "S" filter cartridge is installed upstream.


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

ALUP (old)

**ALUP
(old)**
**Plastic
end caps**

	AFP	AFM	AFS	AFC
				
Particle retention	3 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	2	1	1*
Oils -q. class (ISO 8573-1)	-	2	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	50	80	60

	AFP		AFM		AFS		AFC	
	ALUP	OMEGA AIR	ALUP	OMEGA AIR	ALUP	OMEGA AIR	ALUP	OMEGA AIR
	AFP 30	OALU 30 AFP/P	AFM 30	OALU 30 AFM/M	AFS 30	OALU 30 AFS/S	AFC 30	OALU 30 AFC/A
	AFP 60	OALU 60 AFP/P	AFM 60	OALU 60 AFM/M	AFS 60	OALU 60 AFS/S	AFC 60	OALU 60 AFC/A
	AFP 108	OALU 108 AFP/P	AFM 108	OALU 108 AFM/M	AFS 108	OALU 108 AFS/S	AFC 108	OALU 108 AFC/A
	AFP 180	OALU 180 AFP/P	AFM 180	OALU 180 AFM/M	AFS 180	OALU 180 AFS/S	AFC 180	OALU 180 AFC/A
	AFP 204	OALU 204 AFP/P	AFM 204	OALU 204 AFM/M	AFS 204	OALU 204 AFS/S	AFC 204	OALU 204 AFC/A
	AFP 300	OALU 300 AFP/P	AFM 300	OALU 300 AFM/M	AFS 300	OALU 300 AFS/S	AFC 300	OALU 300 AFC/A
	AFP 432	OALU 432 AFP/P	AFM 432	OALU 432 AFM/M	AFS 432	OALU 432 AFS/S	AFC 432	OALU 432 AFC/A
	AFP 570	OALU 570 AFP/P	AFM 570	OALU 570 AFM/M	AFS 570	OALU 570 AFS/S	AFC 570	OALU 570 AFC/A
	AFP 750	OALU 750 AFP/P	AFM 750	OALU 750 AFM/M	AFS 750	OALU 750 AFS/S	AFC 750	OALU 750 AFC/A
	AFP 990	OALU 990 AFP/P	AFM 990	OALU 990 AFM/M	AFS 990	OALU 990 AFS/S	AFC 990	OALU 990 AFC/A
	AFP 1140	OALU 1140 AFP/P	AFM 1140	OALU 1140 AFM/M	AFS 1140	OALU 1140 AFS/S	AFC 1140	OALU 1140 AFC/A
	AFP 1320	OALU 1320 AFP/P	AFM 1320	OALU 1320 AFM/M	AFS 1320	OALU 1320 AFS/S	AFC 1320	OALU 1320 AFC/A
	AFP 1680	OALU 1680 AFP/P	AFM 1680	OALU 1680 AFM/M	AFS 1680	OALU 1680 AFS/S	AFC 1680	OALU 1680 AFC/A
	AFP 2100	OALU 2100 AFP/P	AFM 2100	OALU 2100 AFM/M	AFS 2100	OALU 2100 AFS/S	AFC 2100	OALU 2100 AFC/A
	AFP 2640	OALU 2640 AFP/P	AFM 2640	OALU 2640 AFM/M	AFS 2640	OALU 2640 AFS/S	AFC 2640	OALU 2640 AFC/A

* Valid if "S" filter cartridge is installed upstream.



ATLAS COPCO +

	DD	PD	UD	QD
ATLAS COPCO + Plastic end caps				
Particle retention	0,1 µm	0,01 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	2	1	1	1*
Oils -q. class (ISO 8573-1)	2	1	1	1
Filter media	borosilicate micro fibres			activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	50	80	80	60

	DD		PD		UD		QD	
	ATLAS COPCO	OMEGA AIR	ATLAS COPCO	OMEGA AIR	ATLAS COPCO	OMEGA AIR	ATLAS COPCO	OMEGA AIR
10+ DD		OAC +10 DD/M	10+ PD	OAC +10 PD/S	9+ UD	OAC +9 UD/S	10+ QD	OAC +10 QD/A
20+ DD		OAC +20 DD/M	20+ PD	OAC +20 PD/S	15+ UD	OAC +15 UD/S	20+ QD	OAC +20 QD/A
35+ DD		OAC +35 DD/M	35+ PD	OAC +35 PD/S	25+ UD	OAC +25 UD/S	35+ QD	OAC +35 QD/A
50+ DD		OAC +50 DD/M	50+ PD	OAC +50 PD/S	45+ UD	OAC +45 UD/S	50+ QD	OAC +50 QD/A
70+ DD		OAC +70 DD/M	70+ PD	OAC +70 PD/S	60+ UD	OAC +60 UD/S	70+ QD	OAC +70 QD/A
-	-	-	-	-	100+ UD	OAC +100 UD/S	-	-
130+ DD		OAC +130 DD/M	130+ PD	OAC +130 PD/S	140+ UD	OAC +140 UD/S	130+ QD	OAC +130 QD/A
170+ DD		OAC +170 DD/M	170+ PD	OAC +170 PD/S	180+ UD	OAC +180 UD/S	170+ QD	OAC +170 QD/A
210+ DD		OAC +210 DD/M	210+ PD	OAC +210 PD/S	220+ UD	OAC +220 UD/S	210+ QD	OAC +210 QD/A
310+ DD		OAC +310 DD/M	310+ PD	OAC +310 PD/S	310+ UD	OAC +310 UD/S	310+ QD	OAC +310 QD/A
425+ DD		OAC +425 DD/M	425+ PD	OAC +425 PD/S	425+ UD	OAC +425 UD/S	425+ QD	OAC +425 QD/A
550+ DD		OAC +550 DD/M	550+ PD	OAC +550 PD/S	550+ UD	OAC +550 UD/S	550+ QD	OAC +550 QD/A

* Valid if "S" filter cartridge is installed upstream.


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

ATLAS COPCO

	DD	PD	QD
ATLAS COPCO Plastic end caps			
Particle retention	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	2	1	1**
Oils -q. class (ISO 8573-1)	2	1	1
Filter media	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	50	80	60

	DD		PD		QD	
	ATLAS COPCO	OMEGA AIR	ATLAS COPCO	OMEGA AIR	ATLAS COPCO	OMEGA AIR
DD 9		OAC 9 DD/M	PD 9	OAC 9 PD/S	QD 9	OAC 9 QD/A
DD 17		OAC 17 DD/M	PD 17	OAC 17 PD/S	QD 17	OAC 17 QD/A
DD 32		OAC 32 DD/M	PD 32	OAC 32 PD/S	QD 32	OAC 32 QD/A
DD 44		OAC 44 DD/M	PD 44	OAC 44 PD/S	QD 44	OAC 44 QD/A
DD 60		OAC 60 DD/M	PD 60	OAC 60 PD/S	QD 60	OAC 60 QD/A
DD 120		OAC 120 DD/M	PD 120	OAC 120 PD/S	QD 120	OAC 120 QD/A
DD 150		OAC 150 DD/M	PD 150	OAC 150 PD/S	QD 150	OAC 150 QD/A
DD 175		OAC 175 DD/M	PD 175	OAC 175 PD/S	QD 175	OAC 175 QD/A
DD 260/DD 280		OAC 260 DD/M*	PD 260/PD 280	OAC 260 PD/S*	QD 260/QD 280	OAC 260 QD/A*
DD 390		OAC 390 DD/M	PD 390	OAC 390 PD/S	QD 390	OAC 390 QD/A
DD 520		OAC 520 DD/M	PD 520	OAC 520 PD/S	QD 520	OAC 520 QD/A

* Aluminium end caps

** Valid if "S" filter cartridge is installed upstream.



ATLAS COPCO

	DD	PD	QD
ATLAS COPCO Aluminium end caps			
Particle retention	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	2	1	1*
Oils -q. class (ISO 8573-1)	2	1	1
Filter media	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	50	80	60

	DD		PD		QD	
	ATLAS COPCO	OMEGA AIR	ATLAS COPCO	OMEGA AIR	ATLAS COPCO	OMEGA AIR
DD 9		OAC 9 DD/M AL	PD 9	OAC 9 PD/S AL	QD 9	OAC 9 QD/A AL
DD 17		OAC 17 DD/M AL	PD 17	OAC 17 PD/S AL	QD 17	OAC 17 QD/A AL
DD 32		OAC 32 DD/M AL	PD 32	OAC 32 PD/S AL	QD 32	OAC 32 QD/A AL
DD 44		OAC 44 DD/M AL	PD 44	OAC 44 PD/S AL	QD 44	OAC 44 QD/A AL
DD 60		OAC 60 DD/M AL	PD 60	OAC 60 PD/S AL	QD 60	OAC 60 QD/A AL
DD 120		OAC 120 DD/M AL	PD 120	OAC 120 PD/S AL	QD 120	OAC 120 QD/A AL
DD 150		OAC 150 DD/M AL	PD 150	OAC 150 PD/S AL	QD 150	OAC 150 QD/A AL
DD 175		OAC 175 DD/M AL	PD 175	OAC 175 PD/S AL	QD 175	OAC 175 QD/A AL
DD 260 DD 280		OAC 260 DD/M AL	PD 260 PD 280	OAC 260 PD/S AL	QD 260 QD 280	OAC 260 QD/A AL
DD 390		OAC 390 DD/M AL	PD 390	OAC 390 PD/S AL	QD 390	OAC 390 QD/A AL
DD 520		OAC 520 DD/M AL	PD 520	OAC 520 PD/S AL	QD 520	OAC 520 QD/A AL
DD 520F		OAC 520F DD/M AL	PD 520F	OAC 520F PD/S AL	QD 520F	OAC 520F QD/A AL
DD 780F		OAC 780F DD/M AL	PD 780F	OAC 780F PD/S AL	QD 780F	OAC 780F QD/A AL
DD 850F		OAC 850F DD/M AL	PD 850F	OAC 850F PD/S AL	QD 850F	OAC 850F QD/A AL

* Valid if "S" filter cartridge is installed upstream.


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

ATLAS COPCO (old)

	DD	PD	QD
ATLAS COPCO (old) Plastic end caps			
Particle retention	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	2	1	1*
Oils -q. class (ISO 8573-1)	2	1	1
Filter media	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	50	80	60

	DD		PD		QD	
	ATLAS COPCO	OMEGA AIR	ATLAS COPCO	OMEGA AIR	ATLAS COPCO	OMEGA AIR
DD 6		OAC 6 DD/M	PD 6	OAC 6 PD/S	QD 6	OAC 6 QD/A
DD 13		OAC 13 DD/M	PD 13	OAC 13 PD/S	QD 13	OAC 13 QD/A
DD 25		OAC 25 DD/M	PD 25	OAC 25 PD/S	QD 25	OAC 25 QD/A
DD 40		OAC 40 DD/M	PD 40	OAC 40 PD/S	QD 40	OAC 40 QD/A
DD 65/DD 85		OAC 65 DD/M	PD 65/PD 85	OAC 65 PD/S	QD 65/QD 85	OAC 65 QD/A
DD 170/DD 195		OAC 195 DD/M	PD 170/PD 195	OAC 195 PD/S	QD 170/QD 195	OAC 195 QD/A
DD 295		OAC 295 DD/M	PD 295	OAC 295 PD/S	QD 295	OAC 295 QD/A
DD 375/DD 400		OAC 400 DD/M	PD 375/PD 400	OAC 400 PD/S	QD 375/QD 400	OAC 400 QD/A
DD 450/DD 500		OAC 500 DD/M	PD 450/PD 500	OAC 500 PD/S	QD 450/QD 500	OAC 500 QD/A

* Valid if "S" filter cartridge is installed upstream.


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

ATLAS COPCO (old)

	DD	PD	QD
ATLAS COPCO (old) Aluminium end caps			
Particle retention	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	2	1	1*
Oils -q. class (ISO 8573-1)	2	1	1
Filter media	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	50	80	60

	DD		PD		QD	
	ATLAS COPCO	OMEGA AIR	ATLAS COPCO	OMEGA AIR	ATLAS COPCO	OMEGA AIR
DD 6		OAC 6 DD/M AL	PD 6	OAC 6 PD/S AL	QD 6	OAC 6 QD/A AL
DD 13		OAC 13 DD/M AL	PD 13	OAC 13 PD/S AL	QD 13	OAC 13 QD/A AL
DD 25		OAC 25 DD/M AL	PD 25	OAC 25 PD/S AL	QD 25	OAC 25 QD/A AL
DD 40		OAC 40 DD/M AL	PD 40	OAC 40 PD/S AL	QD 40	OAC 40 QD/A AL
DD 65/DD 85		OAC 65 DD/M AL	PD 65/PD 85	OAC 65 PD/S AL	QD 65/QD 85	OAC 65 QD/A AL
DD 170/DD 195		OAC 195 DD/M AL	PD 170/PD 195	OAC 195 PD/S AL	QD 170/QD 195	OAC 195 QD/A AL
DD 295		OAC 295 DD/M AL	PD 295	OAC 295 PD/S AL	QD 295	OAC 295 QD/A AL
DD 375/DD 400		OAC 400 DD/M AL	PD 375/PD 400	OAC 400 PD/S AL	QD 375/QD 400	OAC 400 QD/A AL
DD 450/DD 500		OAC 500 DD/M AL	PD 450/PD 500	OAC 500 PD/S AL	QD 450/QD 500	OAC 500 QD/A AL

* Valid if "S" filter cartridge is installed upstream.



ALTERNATIVE FILTER ELEMENTS

ATS

	P	M	H	C
ATS Aluminium end caps				
Particle retention	3 µm	1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	3	1	1*
Oils -q. class (ISO 8573-1)	-	-	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	20	80	60

	P		M		H		C	
	ATS	OMEGA AIR	ATS	OMEGA AIR	ATS	OMEGA AIR	ATS	OMEGA AIR
	0034E; 0020EP	OAT 34 P/P AL	0034E; 0020EM	OAT 34 M/R AL	0034E; 0020EH	OAT 34 H/S AL	0034E; 0020EC	OAT 34 C/A AL
	0077E; 0045EP	OAT 77 P/P AL	0077E; 0045EM	OAT 77 M/R AL	0077E; 0045EH	OAT 77 H/S AL	0077E; 0045EC	OAT 77 C/A AL
	0119E; 0070EP	OAT 119 P/P AL	0119E; 0070EM	OAT 119 M/R AL	0119E; 0070EH	OAT 119 H/S AL	0119E; 0070EC	OAT 119 C/A AL
	0170E; 0100EP	OAT 170 P/P AL	0170E; 0100EM	OAT 170 M/R AL	0170E; 0100EH	OAT 170 H/S AL	0170E; 0100EC	OAT 170 C/A AL
	0212E; 0125EP	OAT 212 P/P AL	0212E; 0125EM	OAT 212 M/R AL	0212E; 0125EH	OAT 212 H/S AL	0212E; 0125EC	OAT 212 C/A AL
	0306E; 0180EP	OAT 306 P/P AL	0306E; 0180EM	OAT 306 M/R AL	0306E; 0180EH	OAT 306 H/S AL	0306E; 0180EC	OAT 306 C/A AL
	0451E; 0265EP	OAT 451 P/P AL	0451E; 0265EM	OAT 451 M/R AL	0451E; 0265EH	OAT 451 H/S AL	0451E; 0265EC	OAT 451 C/A AL
	0629E; 0370EP	OAT 629 P/P AL	0629E; 0370EM	OAT 629 M/R AL	0629E; 0370EH	OAT 629 H/S AL	0629E; 0370EC	OAT 629 C/A AL
	0875E; 0515EP	OAT 875 P/P AL	0875E; 0515EM	OAT 875 M/R AL	0875E; 0515EH	OAT 875 H/S AL	0875E; 0515EC	OAT 875 C/A AL
	1267E; 0745EP	OAT 1267 P/P AL	1267E; 0745EM	OAT 1267 M/R AL	1267E; 0745EH	OAT 1267 H/S AL	1267E; 0745EC	OAT 1267 C/A AL
	1800E; 1060EP	OAT 1800 P/P AL	1800E; 1060EM	OAT 1800 M/R AL	1800E; 1060EH	OAT 1800 H/S AL	1800E; 1060EC	OAT 1800 C/A AL
	2176E; 1280EP	OAT 2176 P/P AL	2176E; 1280EM	OAT 2176 M/R AL	2176E; 1280EH	OAT 2176 H/S AL	2176E; 1280EC	OAT 2176 C/A AL
	2805E; 1650EP	OAT 2805 P/P AL	2805E; 1650EM	OAT 2805 M/R AL	2805E; 1650EH	OAT 2805 H/S AL	2805E; 1650EC	OAT 2805 C/A AL

* Valid if "S" filter cartridge is installed upstream.



ALTERNATIVE FILTER ELEMENTS

BALMA

	MBP	MBM	MBS	MBA
BALMA Plastic end caps				
Particle retention	3 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	2	1	1*
Oils -q. class (ISO 8573-1)	-	2	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	50	80	60

	MBP		MBM		MBS		MBA	
	BALMA	OMEGA AIR	BALMA	OMEGA AIR	BALMA	OMEGA AIR	BALMA	OMEGA AIR
MBP 60		OBA 60 MBP/P	MBM 60	OBA 60 MBM/M	MBS 60	OBA 60 MBS/S	MBA 60	OBA 60 MBA/A
MBP 80		OBA 80 MBP/P	MBM 80	OBA 80 MBM/M	MBS 80	OBA 80 MBS/S	MBA 80	OBA 80 MBA/A
MBP 120		OBA 120 MBP/P	MBM 120	OBA 120 MBM/M	MBS 120	OBA 120 MBS/S	MBA 120	OBA 120 MBA/A
MBP 200		OBA 200 MBP/P	MBM 200	OBA 200 MBM/M	MBS 200	OBA 200 MBS/S	MBA 200	OBA 200 MBA/A
MBP 340		OBA 340 MBP/P	MBM 340	OBA 340 MBM/M	MBS 340	OBA 340 MBS/S	MBA 340	OBA 340 MBA/A
MBP 510		OBA 510 MBP/P	MBM 510	OBA 510 MBM/M	MBS 510	OBA 510 MBS/S	MBA 510	OBA 510 MBA/A
MBP 800		OBA 800 MBP/P	MBM 800	OBA 800 MBM/M	MBS 800	OBA 800 MBS/S	MBA 800	OBA 800 MBA/A
MBP 1000		OBA 1000 MBP/P	MBM 1000	OBA 1000 MBM/M	MBS 1000	OBA 1000 MBS/S	MBA 1000	OBA 1000 MBA/A
MBP 1500		OBA 1500 MBP/P	MBM 1500	OBA 1500 MBM/M	MBS 1500	OBA 1500 MBS/S	MBA 1500	OBA 1500 MBA/A
MBP 2400		OBA 2400 MBP/P	MBM 2400	OBA 2400 MBM/M	MBS 2400	OBA 2400 MBS/S	MBA 2400	OBA 2400 MBA/A

* Valid if "S" filter cartridge is installed upstream.


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

BEA ARS

	RM	RF	RB
BEA Aluminium end caps			
Particle retention	3 µm	1 µm	0,1 µm
Solids - q. class (ISO 8573-1)	3	3	1
Oils -q. class (ISO 8573-1)	-	-	1
Filter media	borosilicate micro fibres		
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65
Diff. pressure (new) [mbar]	20	20	80

	RM		RF		RB	
	BEA	OMEGA AIR	BEA	OMEGA AIR	BEA	OMEGA AIR
	ARS-15 RM	OBE ARS15 RM/P AL	ARS-15 RF	OBE ARS15 RF/R AL	ARS-15 RB	OBE ARS15 RB/M AL
	ARS-30 RM	OBE ARS30 RM/P AL	ARS-30 RF	OBE ARS30 RF/R AL	ARS-30 RB	OBE ARS30 RB/M AL
	ARS-100 RM	OBE ARS100 RM/P AL	ARS-100 RF	OBE ARS100 RF/R AL	ARS-100 RB	OBE ARS100 RB/M AL
	ARS-180 RM	OBE ARS180 RM/P AL	ARS-180 RF	OBE ARS180 RF/R AL	ARS-180 RB	OBE ARS180 RB/M AL
	ARS-290 RM	OBE ARS290 RM/P AL	ARS-290 RF	OBE ARS290 RF/R AL	ARS-290 RB	OBE ARS290 RB/M AL
	ARS-460 RM	OBE ARS460 RM/P AL	ARS-460 RF	OBE ARS460 RF/R AL	ARS-460 RB	OBE ARS460 RB/M AL
	ARS-610 RM	OBE ARS610 RM/P AL	ARS-610 RF	OBE ARS610 RF/R AL	ARS-610 RB	OBE ARS610 RB/M AL
	ARS-930 RM	OBE ARS930 RM/P AL	ARS-930 RF	OBE ARS930 RF/R AL	ARS-930 RB	OBE ARS930 RB/M AL
	ARS-1050 RM	OBE ARS1050 RM/P AL	ARS-1050 RF	OBE ARS1050 RF/R AL	ARS-1050 RB	OBE ARS1050 RB/M AL
	ARS-1250 RM	OBE ARS1250 RM/P AL	ARS-1250 RF	OBE ARS1250 RF/R AL	ARS-1250 RB	OBE ARS1250 RB/M AL
	ARS-1400 RM	OBE ARS1400 RM/P AL	ARS-1400 RF	OBE ARS1400 RF/R AL	ARS-1400 RB	OBE ARS1400 RB/M AL
	ARS-2300 RM	OBE ARS2300 RM/P AL	ARS-2300 RF	OBE ARS2300 RF/R AL	ARS-2300 RB	OBE ARS2300 RB/M AL

* Valid if "S" filter cartridge is installed upstream.

BEA Aluminium end caps	RA	CA
		
Particle retention	0,01 µm	0,1 µm
Solids - q. class (ISO 8573-1)	1	2
Oils -q. class (ISO 8573-1)	1	2
Filter media	borosilicate micro fibres	
Operating temp. range [°C]	1,5 to 65	1,5 to 65
Diff. pressure (new) [mbar]	80	50

	RA		CA	
	BEA	OMEGA AIR	BEA	OMEGA AIR
	ARS-15 RA	OBE ARS15 RA/S AL	ARS-15 CA	OBE ARS15 CA/A AL
	ARS-30 RA	OBE ARS30 RA/S AL	ARS-30 CA	OBE ARS30 CA/A AL
	ARS-100 RA	OBE ARS100 RA/S AL	ARS-100 CA	OBE ARS100 CA/A AL
	ARS-180 RA	OBE ARS180 RA/S AL	ARS-180 CA	OBE ARS180 CA/A AL
	ARS-290 RA	OBE ARS290 RA/S AL	ARS-290 CA	OBE ARS290 CA/A AL
	ARS-460 RA	OBE ARS460 RA/S AL	ARS-460 CA	OBE ARS460 CA/A AL
	ARS-610 RA	OBE ARS610 RA/S AL	ARS-610 CA	OBE ARS610 CA/A AL
	ARS-930 RA	OBE ARS930 RA/S AL	ARS-930 CA	OBE ARS930 CA/A AL
	ARS-1050 RA	OBE ARS1050 RA/S AL	ARS-1050 CA	OBE ARS1050 CA/A AL
	ARS-1250 RA	OBE ARS1250 RA/S AL	ARS-1250 CA	OBE ARS1250 CA/A AL
	ARS-1400 RA	OBE ARS1400 RA/S AL	ARS-1400 CA	OBE ARS1400 CA/A AL
	ARS-2300 RA	OBE ARS2300 RA/S AL	ARS-2300 CA	OBE ARS2300 CA/A AL

* Valid if "S" filter cartridge is installed upstream.


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

BEA ARV

BEA ARV Aluminium end caps	DA-VAC
	
Particle retention	medical vacuum
Solids - q. class (ISO 8573-1)	-
Oils -q. class (ISO 8573-1)	-
Filter media	-
Operating temp. range [°C]	1,5 to 65
Diff. pressure (new) [mbar]	-

	DA-VAC	
	BEA	OMEGA AIR
ARV-100-DA		OBE ARV100 DA/VAC AL
ARV-180-DA		OBE ARV180 DA/VAC AL
ARV-290-DA		OBE ARV290 DA/VAC AL
ARV-460-DA		OBE ARV460 DA/VAC AL
ARV-610-DA		OBE ARV610 DA/VAC AL
ARV-930-DA		OBE ARV930 DA/VAC AL
ARV-1050-DA		OBE ARV1050 DA/VAC AL
ARV-2300-DA		OBE ARV2300 DA/VAC AL



ALTERNATIVE FILTER ELEMENTS

BEA BST

Aluminium
end caps

	RM	RB	RA	CA
				
Particle retention	3 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	2	1	1*
Oils -q. class (ISO 8573-1)	-	2	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	50	80	60

	RM		RB		RA		CA	
	BEA	OMEGA AIR	BEA	OMEGA AIR	BEA	OMEGA AIR	BEA	OMEGA AIR
BST-0032 RM	OBE BST 0032 RM/P AL		BST-0032 RB	OBE BST 0032 RB/M AL	BST-0032 RA	OBE BST 0032 RA/S AL	BST-0032 CA	OBE BST 0032 CA/A AL
BST-0064 RM	OBE BST 0064 RM/P AL		BST-0064 RB	OBE BST 0064 RB/M AL	BST-0064 RA	OBE BST 0064 RA/S AL	BST-0064 CA	OBE BST 0064 CA/A AL
BST-0105 RM	OBE BST 0105 RM/P AL		BST-0105 RB	OBE BST 0105 RB/M AL	BST-0105 RA	OBE BST 0105 RA/S AL	BST-0105 CA	OBE BST 0105 CA/A AL
BST-0190 RM	OBE BST 0190 RM/P AL		BST-0190 RB	OBE BST 0190 RB/M AL	BST-0190 RA	OBE BST 0190 RA/S AL	BST-0190 CA	OBE BST 0190 CA/A AL
BST-0300 RM	OBE BST 0300 RM/P AL		BST-0300 RB	OBE BST 0300 RB/M AL	BST-0300 RA	OBE BST 0300 RA/S AL	BST-0300 CA	OBE BST 0300 CA/A AL
BST-0480 RM	OBE BST 0480 RM/P AL		BST-0480 RB	OBE BST 0480 RB/M AL	BST-0480 RA	OBE BST 0480 RA/S AL	BST-0480 CA	OBE BST 0480 CA/A AL
BST-0700 RM	OBE BST 0700 RM/P AL		BST-0700 RB	OBE BST 0700 RB/M AL	BST-0700 RA	OBE BST 0700 RA/S AL	BST-0700 CA	OBE BST 0700 CA/A AL
BST-1000 RM	OBE BST 1000 RM/P AL		BST-1000 RB	OBE BST 1000 RB/M AL	BST-1000 RA	OBE BST 1000 RA/S AL	BST-1000 CA	OBE BST 1000 CA/A AL
BST-1200 RM	OBE BST 1200 RM/P AL		BST-1200 RB	OBE BST 1200 RB/M AL	BST-1200 RA	OBE BST 1200 RA/S AL	BST-1200 CA	OBE BST 1200 CA/A AL
BST-1400 RM	OBE BST 1400 RM/P AL		BST-1400 RB	OBE BST 1400 RB/M AL	BST-1400 RA	OBE BST 1400 RA/S AL	BST-1400 CA	OBE BST 1400 CA/A AL
BST-1500 RM	OBE BST 1500 RM/P AL		BST-1500 RB	OBE BST 1500 RB/M AL	BST-1500 RA	OBE BST 1500 RA/S AL	BST-1500 CA	OBE BST 1500 CA/A AL
BST-2200 RM	OBE BST 2200 RM/P AL		BST-2200 RB	OBE BST 2200 RB/M AL	BST-2200 RA	OBE BST 2200 RA/S AL	BST-2200 CA	OBE BST 2200 CA/A AL
BST-2300 RM	OBE BST 2300 RM/P AL		BST-2300 RB	OBE BST 2300 RB/M AL	BST-2300 RA	OBE BST 2300 RA/S AL	BST-2300 CA	OBE BST 2300 CA/A AL

* Valid if "S" filter cartridge is installed upstream.


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

BEKO

BEKO
Plastic
end caps

	G	F	S	A
Particle retention	3 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	2	1	1*
Oils -q. class (ISO 8573-1)	-	2	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	50	80	60

	G		F		S		A	
	BEKO	OMEGA AIR	BEKO	OMEGA AIR	BEKO	OMEGA AIR	BEKO	OMEGA AIR
	04 G	OBK 04 G/P	04 F	OBK 04 F/M	04 S	OBK 04 S/S	04 A	OBK 04 A/A
	05 G	OBK 05 G/P	05 F	OBK 05 F/M	05 S	OBK 05 S/S	05 A	OBK 05 A/A
	06 G	OBK 06 G/P	06 F	OBK 06 F/M	06 S	OBK 06 S/S	06 A	OBK 06 A/A
	07 G	OBK 07 G/P	07 F	OBK 07 F/M	07 S	OBK 07 S/S	07 A	OBK 07 A/A
	10 G	OBK 10 G/P	10 F	OBK 10 F/M	10 S	OBK 10 S/S	10 A	OBK 10 A/A
	12 G	OBK 12 G/P	12 F	OBK 12 F/M	12 S	OBK 12 S/S	12 A	OBK 12 A/A
	15 G	OBK 15 G/P	15 F	OBK 15 F/M	15 S	OBK 15 S/S	15 A	OBK 15 A/A
	18 G	OBK 18 G/P	18 F	OBK 18 F/M	18 S	OBK 18 S/S	18 A	OBK 18 A/A
	20 G	OBK 20 G/P	20 F	OBK 20 F/M	20 S	OBK 20 S/S	20 A	OBK 20 A/A
	22 G	OBK 22 G/P	22 F	OBK 22 F/M	22 S	OBK 22 S/S	22 A	OBK 22 A/A
	23 G	OBK 23 G/P	23 F	OBK 23 F/M	23 S	OBK 23 S/S	23 A	OBK 23 A/A
	25 G	OBK 25 G/P	25 F	OBK 25 F/M	25 S	OBK 25 S/S	25 A	OBK 25 A/A
	27 G	OBK 27 G/P	27 F	OBK 27 F/M	27 S	OBK 27 S/S	27 A	OBK 27 A/A
	30 G	OBK 30 G/P	30 F	OBK 30 F/M	30 S	OBK 30 S/S	30 A	OBK 30 A/A
	32 G	OBK 32 G/P	32 F	OBK 32 F/M	32 S	OBK 32 S/S	32 A	OBK 32 A/A
	88 G	OBK 88 G/P	88 F	OBK 88 F/M	88 S	OBK 88 S/S	88 A	OBK 88 A/A

* Valid if "S" filter cartridge is installed upstream.

BEKO Plastic end caps	V	
		
	Particle retention	0,1 µm
	Solids - q. class (ISO 8573-1)	1*
	Oils -q. class (ISO 8573-1)	0/1
Filter media	activated carbon, borosilicate micro fibres	
Operating temp. range [°C]	1,5 to 45	
	V	
	BEKO	OMEGA AIR
	06 V	OBK 06 V/A2
	10 V	OBK 10 V/A2
	18 V	OBK 18 V/A2


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

BOGE HP

	P	M	A
BOGE HP Plastic end caps			
Particle retention	3 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	1	1*
Oils -q. class (ISO 8573-1)	-	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres	activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	80	60

	P		M		A	
	BOGE	OMEGA AIR	BOGE	OMEGA AIR	BOGE	OMEGA AIR
	F6P	OBO F6 P/R	F6M	OBO F6 M/S	F6A	OBO F6 A/A
	F9P	OBO F9 P/R	F9M	OBO F9 M/S	F9A	OBO F9 A/A
	F12P	OBO F12 P/R	F12M	OBO F12 M/S	F12A	OBO F12 A/A
	F18P	OBO F18 P/R	F18M	OBO F18 M/S	F18A	OBO F18 A/A
	F36P	OBO F36 P/R	F36M	OBO F36 M/S	F36A	OBO F36 A/A
	F65P	OBO F65 P/R	F65M	OBO F65 M/S	F65A	OBO F65 A/A
	F95P	OBO F95 P/R	F95M	OBO F95 M/S	F95A	OBO F95 A/A
	F130P	OBO F130 P/R	F130M	OBO F130 M/S	F130A	OBO F130 A/A
	F190P	OBO F190 P/R	F190M	OBO F190 M/S	F190A	OBO F190 A/A
	F260P	OBO F260 P/R	F260M	OBO F260 M/S	F260A	OBO F260 A/A
	F380P	OBO F380 P/R	F380M	OBO F380 M/S	F380A	OBO F380 A/A

* Valid if "S" filter cartridge is installed upstream.



ALTERNATIVE FILTER ELEMENTS

BOGE

	V	FP	A
BOGE (previous) Plastic end caps			
Particle retention	3 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	1	1*
Oils -q. class (ISO 8573-1)	-	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres	activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	80	60

	V		FP		A	
	BOGE	OMEGA AIR	BOGE	OMEGA AIR	BOGE	OMEGA AIR
	1/5 V	OBO 5 V/P	1/5 FP	OBO 5 FP/S	1/5 A	OBO 5 A/A
	1/10 V	OBO 10 V/P	1/10 FP	OBO 10 FP/S	1/10 A	OBO 10 A/A
	1/12 V	OBO 12 V/P	1/12 FP	OBO 12 FP/S	1/12 A	OBO 12 A/A
	1/20 V	OBO 20 V/P	1/20 FP	OBO 20 FP/S	1/20 A	OBO 20 A/A
	1/30 V	OBO 30 V/P	1/30 FP	OBO 30 FP/S	1/30 A	OBO 30 A/A
	1/50 V	OBO 50 V/P	1/50 FP	OBO 50 FP/S	1/50 A	OBO 50 A/A
	1/80 V	OBO 80 V/P	1/80 FP	OBO 80 FP/S	1/80 A	OBO 80 A/A
	1/120 V	OBO 120 V/P	1/120 FP	OBO 120 FP/S	1/120 A	OBO 120 A/A
	1/160 V	OBO 160 V/P	1/160 FP	OBO 160 FP/S	1/160 A	OBO 160 A/A
	1/250 V	OBO 250 V/P	1/250 FP	OBO 250 FP/S	1/250 A	OBO 250 A/A

* Valid if "S" filter cartridge is installed upstream.



CECCATO (new)

	P	G	C	V
CECCATO (new) Plastic end caps				
Particle retention	1 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	3	2	1	1*
Oils -q. class (ISO 8573-1)	-	2	1	1
Filter media	borosilicate micro fibres			activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	20	50	80	60

	P		G		C		V	
	CECCATO	OMEGA AIR	CECCATO	OMEGA AIR	CECCATO	OMEGA AIR	CECCATO	OMEGA AIR
FILTER 7		OCE 7 P/R	FILTER 7	OCE 7 G/M	FILTER 7	OCE 7 C/S	FILTER 7	OCE 7 V/A
FILTER 15		OCE 15 P/R	FILTER 15	OCE 15 G/M	FILTER 15	OCE 15 C/S	FILTER 15	OCE 15 V/A
FILTER 21		OCE 21 P/R	FILTER 21	OCE 21 G/M	FILTER 21	OCE 21 C/S	FILTER 21	OCE 21 V/A
FILTER 30		OCE 30 P/R	FILTER 30	OCE 30 G/M	FILTER 30	OCE 30 C/S	FILTER 30	OCE 30 V/A
FILTER 48		OCE 48 P/R	FILTER 48	OCE 48 G/M	FILTER 48	OCE 48 C/S	FILTER 48	OCE 48 V/A
FILTER 84		OCE 84 P/R	FILTER 84	OCE 84 G/M	FILTER 84	OCE 84 C/S	FILTER 84	OCE 84 V/A
FILTER 114		OCE 114 P/R	FILTER 114	OCE 114 G/M	FILTER 114	OCE 114 C/S	FILTER 114	OCE 114 V/A
FILTER 156		OCE 156 P/R	FILTER 156	OCE 156 G/M	FILTER 156	OCE 156 C/S	FILTER 156	OCE 156 V/A
FILTER 216		OCE 216 P/R	FILTER 216	OCE 216 G/M	FILTER 216	OCE 216 C/S	FILTER 216	OCE 216 V/A
FILTER 315		OCE 315 P/R	FILTER 315	OCE 315 G/M	FILTER 315	OCE 315 C/S	FILTER 315	OCE 315 V/A
FILTER 405		OCE 405 P/R	FILTER 405	OCE 405 G/M	FILTER 405	OCE 405 C/S	FILTER 405	OCE 405 V/A

* Valid if "S" filter cartridge is installed upstream.


**OMEGA
AIR**

ALTERNATIVE FILTER ELEMENTS

CECCATO (old)

	MBP	MBM	MBS	MBA
CECCATO (old) Plastic end caps				
Particle retention	3 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	2	1	1*
Oils -q. class (ISO 8573-1)	-	2	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	50	80	60

	MBP		MBM		MBS		MBA	
	CECCATO	OMEGA AIR	CECCATO	OMEGA AIR	CECCATO	OMEGA AIR	CECCATO	OMEGA AIR
MBP 10		OCE 10 MBP/P	MBM 10	OCE 10 MBM/M	MBS 10	OCE 10 MBS/S	MBA 10	OCE 10 MBA/A
MBP 13		OCE 13 MBP/P	MBM 13	OCE 13 MBM/M	MBS 13	OCE 13 MBS/S	MBA 13	OCE 13 MBA/A
MBP 20		OCE 20 MBP/P	MBM 20	OCE 20 MBM/M	MBS 20	OCE 20 MBS/S	MBA 20	OCE 20 MBA/A
MBP 33		OCE 33 MBP/P	MBM 33	OCE 33 MBM/M	MBS 33	OCE 33 MBS/S	MBA 33	OCE 33 MBA/A
MBP 60		OCE 60 MBP/P	MBM 60	OCE 60 MBM/M	MBS 60	OCE 60 MBS/S	MBA 60	OCE 60 MBA/A
MBP 85		OCE 85 MBP/P	MBM 85	OCE 85 MBM/M	MBS 85	OCE 85 MBS/S	MBA 85	OCE 85 MBA/A
MBP 130		OCE 130 MBP/P	MBM 130	OCE 130 MBM/M	MBS 130	OCE 130 MBS/S	MBA 130	OCE 130 MBA/A
MBP 170		OCE 170 MBP/P	MBM 170	OCE 170 MBM/M	MBS 170	OCE 170 MBS/S	MBA 170	OCE 170 MBA/A
MBP 250		OCE 250 MBP/P	MBM 250	OCE 250 MBM/M	MBS 250	OCE 250 MBS/S	MBA 250	OCE 250 MBA/A
MBP 400		OCE 400 MBP/P	MBM 400	OCE 400 MBM/M	MBS 400	OCE 400 MBS/S	MBA 400	OCE 400 MBA/A

* Valid if "S" filter cartridge is installed upstream.


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

CHICAGO PNEUMATIC (new)

	P	G	C	V
CHICAGO PNEUMATIC (new) Plastic end caps				
Particle retention	1 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	3	2	1	1*
Oils -q. class (ISO 8573-1)	-	2	1	1
Filter media	borosilicate micro fibres			activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	20	50	80	60

	P		G		C		V	
	CHICAGO PNEUMATIC	OMEGA AIR	CHICAGO PNEUMATIC	OMEGA AIR	CHICAGO PNEUMATIC	OMEGA AIR	CHICAGO PNEUMATIC	OMEGA AIR
FILTER 45		OCP 45 P/R	FILTER 45	OCP 45 G/M	FILTER 45	OCP 45 C/S	FILTER 45	OCP 45 V/A
FILTER 90		OCP 90 P/R	FILTER 90	OCP 90 G/M	FILTER 90	OCP 90 C/S	FILTER 90	OCP 90 V/A
FILTER 125		OCP 125 P/R	FILTER 125	OCP 125 G/M	FILTER 125	OCP 125 C/S	FILTER 125	OCP 125 V/A
FILTER 180		OCP 180 P/R	FILTER 180	OCP 180 G/M	FILTER 180	OCP 180 C/S	FILTER 180	OCP 180 V/A
FILTER 290		OCP 290 P/R	FILTER 290	OCP 290 G/M	FILTER 290	OCP 290 C/S	FILTER 290	OCP 290 V/A
FILTER 505		OCP 505 P/R	FILTER 505	OCP 505 G/M	FILTER 505	OCP 505 C/S	FILTER 505	OCP 505 V/A
FILTER 685		OCP 685 P/R	FILTER 685	OCP 685 G/M	FILTER 685	OCP 685 C/S	FILTER 685	OCP 685 V/A
FILTER 935		OCP 935 P/R	FILTER 935	OCP 935 G/M	FILTER 935	OCP 935 C/S	FILTER 935	OCP 935 V/A
FILTER 1295		OCP 1295 P/R	FILTER 1295	OCP 1295 G/M	FILTER 1295	OCP 1295 C/S	FILTER 1295	OCP 1295 V/A
FILTER 1890		OCP 1890 P/R	FILTER 1890	OCP 1890 G/M	FILTER 1890	OCP 1890 C/S	FILTER 1890	OCP 1890 V/A
FILTER 2430		OCP 2430 P/R	FILTER 2430	OCP 2430 G/M	FILTER 2430	OCP 2430 C/S	FILTER 2430	OCP 2430 V/A

* Valid if "S" filter cartridge is installed upstream.



ALTERNATIVE FILTER ELEMENTS

CHICAGO PNEUMATIC (old)

	MBP	MBM	MBS	MBA
CHICAGO PNEUMATIC (old) Plastic end caps				
Particle retention	3 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	2	1	1*
Oils -q. class (ISO 8573-1)	-	2	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	50	80	60

	MBP		MBM		MBS		MBA	
	CHICAGO PNEUMATIC	OMEGA AIR	CHICAGO PNEUMATIC	OMEGA AIR	CHICAGO PNEUMATIC	OMEGA AIR	CHICAGO PNEUMATIC	OMEGA AIR
	MBP 60	OCP 60 MBP/P	MBM 60	OCP 60 MBM/M	MBS 60	OCP 60 MBS/S	MBA 60	OCP 60 MBA/A
	MBP 80	OCP 80 MBP/P	MBM 80	OCP 80 MBM/M	MBS 80	OCP 80 MBS/S	MBA 80	OCP 80 MBA/A
	MBP 120	OCP 120 MBP/P	MBM 120	OCP 120 MBM/M	MBS 120	OCP 120 MBS/S	MBA 120	OCP 120 MBA/A
	MBP 200	OCP 200 MBP/P	MBM 200	OCP 200 MBM/M	MBS 200	OCP 200 MBS/S	MBA 200	OCP 200 MBA/A
	MBP 340	OCP 340 MBP/P	MBM 340	OCP 340 MBM/M	MBS 340	OCP 340 MBS/S	MBA 340	OCP 340 MBA/A
	MBP 510	OCP 510 MBP/P	MBM 510	OCP 510 MBM/M	MBS 510	OCP 510 MBS/S	MBA 510	OCP 510 MBA/A
	MBP 800	OCP 800 MBP/P	MBM 800	OCP 800 MBM/M	MBS 800	OCP 800 MBS/S	MBA 800	OCP 800 MBA/A
	MBP 1000	OCP 1000 MBP/P	MBM 1000	OCP 1000 MBM/M	MBS 1000	OCP 1000 MBS/S	MBA 1000	OCP 1000 MBA/A
	MBP 1500	OCP 1500 MBP/P	MBM 1500	OCP 1500 MBM/M	MBS 1500	OCP 1500 MBS/S	MBA 1500	OCP 1500 MBA/A
	MBP 2400	OCP 2400 MBP/P	MBM 2400	OCP 2400 MBM/M	MBS 2400	OCP 2400 MBS/S	MBA 2400	OCP 2400 MBA/A

* Valid if "S" filter cartridge is installed upstream.


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

CKD (AF1000)

	P	S	M	X
CKD (AF1000) Plastic end caps				
Particle retention	1 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	3	2	1	1*
Oils -q. class (ISO 8573-1)	-	2	1	1
Filter media	borosilicate micro fibres			activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	20	50	80	60

	P		S		M		X	
	CKD	OMEGA AIR	CKD	OMEGA AIR	CKD	OMEGA AIR	CKD	OMEGA AIR
AF 1003P-20		OCK AF1000 058 P/P	AF 1003S-20	OCK AF1000 058 S/M	AF 1003M-20	OCK AF1000 058 M/S	AF 1003X-20	OCK AF1000 058 X/A
AF 1004P-25 AF 1008P-40		OCK AF1000 145 P/P	AF 1004S-25 AF 1008S-40	OCK AF1000 145 S/M	AF 1004M-25 AF 1008M-40	OCK AF1000 145 M/S	AF 1004X-25 AF 1008X-40	OCK AF1000 145 X/A
AF 1012P-40 AF 1013P-50		OCK AF1000 220 P/P	AF 1012S-40 AF 1013S-50	OCK AF1000 220 S/M	AF 1012M-40 AF 1013M-50	OCK AF1000 220 M/S	AF 1012X-40 AF 1013X-50	OCK AF1000 220 X/A
AF 1017P-50		OCK AF1000 330 P/P	AF 1017S-50	OCK AF1000 330 S/M	AF 1017M-50	OCK AF1000 330 M/S	AF 1017X-50	OCK AF1000 330 X/A
AF 1024P-65		OCK AF1000 430 P/P	AF 1024S-65	OCK AF1000 430 S/M	AF 1024M-65	OCK AF1000 430 M/S	AF 1024X-65	OCK AF1000 430 X/A

* Valid if "S" filter cartridge is installed upstream.


**OMEGA
AIR**

ALTERNATIVE FILTER ELEMENTS

CKD (AF2000)

	P	M	X
CKD (AF1000) Plastic end caps			
Particle retention	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	2	1	1*
Oils -q. class (ISO 8573-1)	2	1	1
Filter media	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	50	80	60

	P		M		X	
	CKD	OMEGA AIR	CKD	OMEGA AIR	CKD	OMEGA AIR
AF2004P-KD4-162758		OCK AF2004 P/XM	AF2004M-KD4-162759	OCK AF2004 M/XS	AF2004X-KD4-162760	OCK AF2004 X/A
AF2007P-KD4-162761		OCK AF2007 P/XM	AF2007M-KD4-162762	OCK AF2007 M/XS	AF2007X-KD4-162763	OCK AF2007 X/A
AF2010P-KD4-162764		OCK AF2010 P/XM	AF2010M-KD4-162765	OCK AF2010 M/XS	AF2010X-KD4-162766	OCK AF2010 X/A
AF2013P-KD4-162767		OCK AF2013 P/XM	AF2013M-KD4-162768	OCK AF2013 M/XS	AF2013X-KD4-162769	OCK AF2013 X/A
AF2020P-KD4-162770		OCK AF2020 P/XM	AF2020M-KD4-162771	OCK AF2020 M/XS	AF2020X-KD4-162772	OCK AF2020 X/A
AF2026P-KD4-168277		OCK AF2026 M/XS	AF2026M-KD4-168278	OCK AF2026 M/XS	AF2026X-KD4-168279	OCK AF2026 X/A

* Valid if "S" filter cartridge is installed upstream.


**OMEGA
AIR**

ALTERNATIVE FILTER ELEMENTS

COMPAIR

	B+E	C+F	D
COMPAIR Plastic end caps			
Particle retention	1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	3	1	1*
Oils -q. class (ISO 8573-1)	-	1	1
Filter media	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	20	80	60

	B+E		C+F		D	
	COMPAIR	OMEGA AIR	COMPAIR	OMEGA AIR	COMPAIR	OMEGA AIR
	CE0006N B+E	OCOE 0006 B+E/R	CE0006N C+F	OCOE 0006 C+F/S	CE0006N D	OCOE 0006 D/A
	CE0012N B+E	OCOE 0012 B+E/R	CE0012N C+F	OCOE 0012 C+F/S	CE0012N D	OCOE 0012 D/A
	CE0018N B+E	OCOE 0018 B+E/R	CE0018N C+F	OCOE 0018 C+F/S	CE0018N D	OCOE 0018 D/A
	CE0036N B+E	OCOE 0036 B+E/R	CE0036N C+F	OCOE 0036 C+F/S	CE0036N D	OCOE 0036 D/A
	CE0066N B+E	OCOE 0066 B+E/R	CE0066N C+F	OCOE 0066 C+F/S	CE0066N D	OCOE 0066 D/A
	CE0096N B+E	OCOE 0096 B+E/R	CE0096N C+F	OCOE 0096 C+F/S	CE0096N D	OCOE 0096 D/A
	CE0132N B+E	OCOE 0132 B+E/R	CE0132N C+F	OCOE 0132 C+F/S	CE0132N D	OCOE 0132 D/A
	CE0198N B+E	OCOE 0198 B+E/R	CE0198N C+F	OCOE 0198 C+F/S	CE0198N D	OCOE 0198 D/A
	CE0258N B+E	OCOE 0258 B+E/R	CE0258N C+F	OCOE 0258 C+F/S	CE0258N D	OCOE 0258 D/A
	CE0372N B+E	OCOE 0372 B+E/R	CE0372N C+F	OCOE 0372 C+F/S	CE0372N D	OCOE 0372 D/A
	CE0600N B+E F	OCOE 0600F B+E/R	CE0600N C+F F	OCOE 0600F C+F/S	CE0600N D F	OCOE 0600F D/A
	CE0258N B+E F	OCOE 0258F B+E/R	CE0258N C+F F	OCOE 0258F C+F/S	CE0258N D F	OCOE 0258F D/A
	CE0372N B+E F	OCOE 0372F B+E/R	CE0372N C+F F	OCOE 0372F C+F/S	CE0372N D F	OCOE 0372F D/A

* Valid if "S" filter cartridge is installed upstream.



ALTERNATIVE FILTER ELEMENTS

COMPAIR (previous)

	B	C	D
COMPAIR (previous) Plastic end caps			
Particle retention	1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	3	1	1*
Oils -q. class (ISO 8573-1)	-	1	1
Filter media	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	20	80	60

	B		C		D	
	COMPAIR	OMEGA AIR	COMPAIR	OMEGA AIR	COMPAIR	OMEGA AIR
	CE0005 B	OCO 0005 B/R	CE0005 C	OCO 0005 C/S	CE0005 D	OCO 0005 D/A
	CE0010 B	OCO 0010 B/R	CE0010 C	OCO 0010 C/S	CE0010 D	OCO 0010 D/A
	CE0018 B	OCO 0018 B/R	CE0018 C	OCO 0018 C/S	CE0018 D	OCO 0018 D/A
	CE0036 B	OCO 0036 B/R	CE0036 C	OCO 0036 C/S	CE0036 D	OCO 0036 D/A
	CE0048 B CE0072 B CE0087 B	OCO 0048 B/R	CE0048 C CE0072 C CE0087 C	OCO 0048 C/S	CE0048 D CE0072 D CE0087 D	OCO 0048 D/A
	CE0120 B CE0132 B	OCO 0132 B/R	CE0120 C CE0132 C	OCO 0132 C/S	CE0120 D CE0132 D	OCO 0132 D/A
	CE0198 B	OCO 0198 B/R	CE0198 C	OCO 0198 C/S	CE0198 D	OCO 0198 D/A
	CE0240 B CE0258 B	OCO 0258 B/R	CE0240 C CE0258 C	OCO 0258 C/S	CE0240 D CE0258 D	OCO 0258 D/A
	CE0372 B	OCO 0372 B/R	CE0372 C	OCO 0372 C/S	CE0372 D	OCO 0372 D/A

* Valid if "S" filter cartridge is installed upstream.


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

COMPAIR (previous)

COMPAIR (previous) Aluminium end caps	B	C	D
			
Particle retention	1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	3	1	1*
Oils - q. class (ISO 8573-1)	-	1	1
Filter media	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	20	80	60

	B		C		D	
	COMPAIR	OMEGA AIR	COMPAIR	OMEGA AIR	COMPAIR	OMEGA AIR
	CE0005 B	OCO 0005 B/R AL	CE0005 C	OCO 0005 C/S AL	CE0005 D	OCO 0005 D/A AL
	CE0010 B	OCO 0010 B/R AL	CE0010 C	OCO 0010 C/S AL	CE0010 D	OCO 0010 D/A AL
	CE0018 B	OCO 0018 B/R AL	CE0018 C	OCO 0018 C/S AL	CE0018 D	OCO 0018 D/A AL
	CE0036 B	OCO 0036 B/R AL	CE0036 C	OCO 0036 C/S AL	CE0036 D	OCO 0036 D/A AL
	CE0048 B CE0072 B CE0087 B	OCO 0048 B/R AL	CE0048 C CE0072 C CE0087 C	OCO 0048 C/S AL	CE0048 D CE0072 D CE0087 D	OCO 0048 D/A AL
	CE0120 B CE0132 B	OCO 0132 B/R AL	CE0120 C CE0132 C	OCO 0132 C/S AL	CE0120 D CE0132 D	OCO 0132 D/A AL
	CE0198 B	OCO 0198 B/R AL	CE0198 C	OCO 0198 C/S AL	CE0198 D	OCO 0198 D/A AL
	CE0240 B CE0258 B	OCO 0258 B/R AL	CE0240 C CE0258 C	OCO 0258 C/S AL	CE0240 D CE0258 D	OCO 0258 D/A AL
	CE0372 B	OCO 0372 B/R AL	CE0372 C	OCO 0372 C/S AL	CE0372 D	OCO 0372 D/A AL

* Valid if "S" filter cartridge is installed upstream.



DELTECH 300

	S3	P3	H3	C3
DELTECH 300 Plastic end caps				
Particle retention	3 µm	1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	3	1	1*
Oils - q. class (ISO 8573-1)	-	-	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	20	80	60

	S3		P3		H3		C3	
	DELTECH	OMEGA AIR	DELTECH	OMEGA AIR	DELTECH	OMEGA AIR	DELTECH	OMEGA AIR
02-S3		ODT 300 02 S3/P	02-P3	ODT 300 02 P3/R	02-H3	ODT 300 02 H3/S	02-C3	ODT 300 02 C3/A
03-S3		ODT 300 03 S3/P	03-P3	ODT 300 03 P3/R	03-H3	ODT 300 03 H3/S	03-C3	ODT 300 03 C3/A
04-S3		ODT 300 04 S3/P	04-P3	ODT 300 04 P3/R	04-H3	ODT 300 04 H3/S	04-C3	ODT 300 04 C3/A
06-S3		ODT 300 06 S3/P	06-P3	ODT 300 06 P3/R	06-H3	ODT 300 06 H3/S	06-C3	ODT 300 06 C3/A
07-S3		ODT 300 07 S3/P	07-P3	ODT 300 07 P3/R	07-H3	ODT 300 07 H3/S	07-C3	ODT 300 07 C3/A
08-S3		ODT 300 08 S3/P	08-P3	ODT 300 08 P3/R	08-H3	ODT 300 08 H3/S	08-C3	ODT 300 08 C3/A
10-S3		ODT 300 10 S3/P	10-P3	ODT 300 10 P3/R	10-H3	ODT 300 10 H3/S	10-C3	ODT 300 10 C3/A
11-S3		ODT 300 11 S3/P	11-P3	ODT 300 11 P3/R	11-H3	ODT 300 11 H3/S	11-C3	ODT 300 11 C3/A
12-S3		ODT 300 12 S3/P	12-P3	ODT 300 12 P3/R	12-H3	ODT 300 12 H3/S	12-C3	ODT 300 12 C3/A
13-S3		ODT 300 13 S3/P	13-P3	ODT 300 13 P3/R	13-H3	ODT 300 13 H3/S	13-C3	ODT 300 13 C3/A
14-S3		ODT 300 14 S3/P	14-P3	ODT 300 14 P3/R	14-H3	ODT 300 14 H3/S	14-C3	ODT 300 14 C3/A
15-S3		ODT 300 15 S3/P	15-P3	ODT 300 15 P3/R	15-H3	ODT 300 15 H3/S	15-C3	ODT 300 15 C3/A
16-S3		ODT 300 16 S3/P	16-P3	ODT 300 16 P3/R	16-H3	ODT 300 16 H3/S	16-C3	ODT 300 16 C3/A
17-S3		ODT 300 17 S3/P	17-P3	ODT 300 17 P3/R	17-H3	ODT 300 17 H3/S	17-C3	ODT 300 17 C3/A

* Valid if "S" filter cartridge is installed upstream.


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

DELTECH

DELTECH Aluminium end caps	DFD	PFD	HFD	CFD
Particle retention	1 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	3	2	1	1*
Oils -q. class (ISO 8573-1)	-	2	1	1
Filter media	borosilicate micro fibres			activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	20	50	80	60

	DFD		PFD		HFD		CFD	
	DELTECH	OMEGA AIR	DELTECH	OMEGA AIR	DELTECH	OMEGA AIR	DELTECH	OMEGA AIR
DFD 9	ODT 9 DFD/R AL		PFD 9	ODT 9 PFD/M AL	HFD 9	ODT 9 HFD/S AL	CFD 9	ODT 9 CFD/A AL
DFD 18	ODT 18 DFD/R AL		PFD 18	ODT 18 PFD/M AL	HFD 18	ODT 18 HFD/S AL	CFD 18	ODT 18 CFD/A AL
DFD 36	ODT 36 DFD/R AL		PFD 36	ODT 36 PFD/M AL	HFD 36	ODT 36 HFD/S AL	CFD 36	ODT 36 CFD/A AL
DFD 54	ODT 54 DFD/R AL		PFD 54	ODT 54 PFD/M AL	HFD 54	ODT 54 HFD/S AL	CFD 54	ODT 54 CFD/A AL
DFD 90	ODT 90 DFD/R AL		PFD 90	ODT 90 PFD/M AL	HFD 90	ODT 90 HFD/S AL	CFD 90	ODT 90 CFD/A AL
DFD 135	ODT 135 DFD/R AL		PFD 135	ODT 135 PFD/M AL	HFD 135	ODT 135 HFD/S AL	CFD 135	ODT 135 CFD/A AL
DFD 216	ODT 216 DFD/R AL		PFD 216	ODT 216 PFD/M AL	HFD 216	ODT 216 HFD/S AL	CFD 216	ODT 216 CFD/A AL
DFD 285	ODT 285 DFD/R AL		PFD 285	ODT 285 PFD/M AL	HFD 285	ODT 285 HFD/S AL	CFD 285	ODT 285 CFD/A AL
DFD 405	ODT 405 DFD/R AL		PFD 405	ODT 405 PFD/M AL	HFD 405	ODT 405 HFD/S AL	CFD 405	ODT 405 CFD/A AL
DFD 540	ODT 540 DFD/R AL		PFD 540	ODT 540 PFD/M AL	HFD 540	ODT 540 HFD/S AL	CFD 540	ODT 540 CFD/A AL
DFD 750	ODT 750 DFD/R AL		PFD 750	ODT 750 PFD/M AL	HFD 750	ODT 750 HFD/S AL	CFD 750	ODT 750 CFD/A AL
DFD 8113	ODT 8113 DFD/R AL		PFD 8113	ODT 8113 PFD/M AL	HFD 8113	ODT 8113 HFD/S AL	CFD 8113	ODT 8113 CFD/A AL
DFDL 8113	ODT 8113L DFD/R AL		PFDL 8113	ODT 8113L PFD/M AL	HFDL 8113	ODT 8113L HFD/S AL	CFDL 8113	ODT 8113L CFD/A AL

* Valid if "S" filter cartridge is installed upstream.



ALTERNATIVE FILTER ELEMENTS

DOMNICK HUNTER - oil-x evolution

	AR	AO	AA	ACS	MV
DOMNICK HUNTER Plastic end caps					
Particle retention	1 µm	0,1 µm	0,01 µm	activated carbon	medical vacuum
Solids - q. class (ISO 8573-1)	3	2	1	1*	-
Oils -q. class (ISO 8573-1)	-	2	1	1	-
Filter media	borosilicate micro fibres			activated carbon	
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45	1,5 to 65
Diff. pressure (new) [mbar]	20	50	80	60	-

	AR		AO		AA		ACS		MV	
	DOMNICK HUNTER	OMEGA AIR	DOMNICK HUNTER	OMEGA AIR	DOMNICK HUNTER	OMEGA AIR	DOMNICK HUNTER	OMEGA AIR	DOMNICK HUNTER	OMEGA AIR
	005 AR	ODHE 005 AR/R	005 AO	ODHE 005 AO/M	005 AA	ODHE 005 AA/S	005 ACS	ODHE 005 ACS/A		
	010 AR	ODHE 010 AR/R	010 AO	ODHE 010 AO/M	010 AA	ODHE 010 AA/S	010 ACS	ODHE 010 ACS/A	010 MV	ODHE 010 MV/MV
	015 AR	ODHE 015 AR/R	015 AO	ODHE 015 AO/M	015 AA	ODHE 015 AA/S	015 ACS	ODHE 015 ACS/A	015 MV	ODHE 015 MV/MV
	020 AR	ODHE 020 AR/R	020 AO	ODHE 020 AO/M	020 AA	ODHE 020 AA/S	020 ACS	ODHE 020 ACS/A	020 MV	ODHE 020 MV/MV
	025 AR	ODHE 025 AR/R	025 AO	ODHE 025 AO/M	025 AA	ODHE 025 AA/S	025 ACS	ODHE 025 ACS/A	025 MV	ODHE 025 MV/MV
	030 AR	ODHE 030 AR/R	030 AO	ODHE 030 AO/M	030 AA	ODHE 030 AA/S	030 ACS	ODHE 030 ACS/A	030 MV	ODHE 030 MV/MV
	035 AR	ODHE 035 AR/R	035 AO	ODHE 035 AO/M	035 AA	ODHE 035 AA/S	035 ACS	ODHE 035 ACS/A	035 MV	ODHE 035 MV/MV
	040 AR	ODHE 040 AR/R	040 AO	ODHE 040 AO/M	040 AA	ODHE 040 AA/S	040 ACS	ODHE 040 ACS/A	040 MV	ODHE 040 MV/MV
	045 AR	ODHE 045 AR/R	045 AO	ODHE 045 AO/M	045 AA	ODHE 045 AA/S	045 ACS	ODHE 045 ACS/A	045 MV	ODHE 045 MV/MV
	050 AR	ODHE 050 AR/R	050 AO	ODHE 050 AO/M	050 AA	ODHE 050 AA/S	050 ACS	ODHE 050 ACS/A	050 MV	ODHE 050 MV/MV
	055 AR	ODHE 055 AR/R	055 AO	ODHE 055 AO/M	055 AA	ODHE 055 AA/S	055 ACS	ODHE 055 ACS/A	055 MV	ODHE 055 MV/MV
	060 AR	ODHE 060 AR/R	060 AO	ODHE 060 AO/M	060 AA	ODHE 060 AA/S	060 ACS	ODHE 060 ACS/A		
	150 AR	ODHE 150 AR/R	150 AO	ODHE 150 AO/M	150 AA	ODHE 150 AA/S	150 ACS	ODHE 150 ACS/A		
	200 AR	ODHE 200 AR/R	200 AO	ODHE 200 AO/M	200 AA	ODHE 200 AA/S	200 ACS	ODHE 200 ACS/A		

* Valid if "S" filter cartridge is installed upstream.


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

DOMNICK HUNTER - oil-x plus

	PF	AO
DOMNICK HUNTER Plastic end caps		
Particle retention	3 µm	0,1 µm
Solids - q. class (ISO 8573-1)	6	2
Oils - q. class (ISO 8573-1)	-	2
Filter media	acrylic fibres, cellulose	borosilicate micro fibres
Operating temp. range [°C]	1,5 to 65	1,5 to 65
Diff. pressure (new) [mbar]	10	50

	PF				AO			
	DOMNICK HUNTER			OMEGA AIR	DOMNICK HUNTER			OMEGA AIR
	Oil-x plus	Oil-x	Oil-x 80		Oil-x plus	Oil-x	Oil-x 80	
	K 009 PF	K 006 PF	/	ODH 009 PF/P	K 009 AO	K 006 AO	/	ODH 009 AO/M
	K 017 PF	K 013 PF	E 007 PF	ODH 017 PF/P	K 017 AO	K 013 AO	E 007 AO	ODH 017 AO/M
	K 030 PF	K 025 PF	E 011 PF	ODH 030 PF/P	K 030 AO	K 025 AO	E 011 AO	ODH 030 AO/M
	K 058 PF	K 040 PF	E 035 PF	ODH 058 PF/P	K 058 AO	K 040 AO	E 035 AO	ODH 058 AO/M
	K 145 PF	K 085 PF	E 65 PF / E 060 PF	ODH 145 PF/P	K 145 AO	K 085 AO	E 65 AO / E 060 AO	ODH 145 AO/M
	K 220 PF	K 195 PF	E 120 PF	ODH 220 PF/P	K 220 AO	K 195 AO	E 120 AO	ODH 220 AO/M
	K 330 PF	K 295 PF	E 250 PF / E 200 PF	ODH 330 PF/P	K 330 AO	K 295 AO	E 250 AO / E 200 AO	ODH 330 AO/M
	K 430 PF	K 400 PF	N/A	ODH 430 PF/P	K 430 AO	K 400 AO	N/A	ODH 430 AO/M
	K 620 PF	K 500 PF	E 360 PF / E 300 PF	ODH 620 PF/P	K 620 AO	K 500 AO	E 360 AO / E 300 AO	ODH 620 AO/M

DOMNICK HUNTER Plastic end caps	AA			ACS		MV	
							
Particle retention	0,01 µm			activated carbon		medical vacuum	
Solids - q. class (ISO 8573-1)	1			1*		-	
Oils -q. class (ISO 8573-1)	1			1		-	
Filter media	borosilicate micro fibres			activated carbon		-	
Operating temp. range [°C]	1,5 to 65			1,5 to 45		1,5 to 65	
Diff. pressure (new) [mbar]	80			60		-	
DOMNICK HUNTER	AA			ACS		MV	
	DOMNICK HUNTER			DOMNICK HUNTER	OMEGA AIR	DOMNICK HUNTER	OMEGA AIR
	Oil-x plus	Oil-x	Oil-x 80	Oil-x plus	OMEGA AIR	DOMNICK HUNTER	OMEGA AIR
	K 009 AA	K 006 AA	/	K 009 ACS	ODH 009 ACS/A	K 009 MV	ODH 009 MV/MV
	K 017 AA	K 013 AA	E 007 AA	K 017 ACS	ODH 017 ACS/A	K 017 MV	ODH 017 MV/MV
	K 030 AA	K 025 AA	E 011 AA	K 030 ACS	ODH 030 ACS/A	K 030 MV	ODH 030 MV/MV
	K 058 AA	K 040 AA	E 035 AA	K 058 ACS	ODH 058 ACS/A	K 058 MV	ODH 058 MV/MV
	K 145 AA	K 085 AA	E 65 AA / E 060 AA	K 145 ACS	ODH 145 ACS/A	K 145 MV	ODH 145 MV/MV
	K 220 AA	K 195 AA	E 120 AA	K 220 ACS	ODH 220 ACS/A	K 220 MV	ODH 220 MV/MV
	K 330 AA	K 295 AA	E 250 AA / E 200 AA	K 330 ACS	ODH 330 ACS/A	K 330 MV	ODH 330 MV/MV
	K 430 AA	K 400 AA	N/A	K 430 ACS	ODH 430 ACS/A	K 430 MV	ODH 430 MV/MV
	K 620 AA	K 500 AA	E 360 AA / E 300 AA	K 620 ACS	ODH 620 ACS/A	K 620 MV	ODH 620 MV/MV

* Valid if "S" filter cartridge is installed upstream.

DOMNICK HUNTER Plastic end caps	AC		HC	
				
Particle retention	0,1 µm		0,1 µm	
Solids - q. class (ISO 8573-1)	1*		1*	
Oils -q. class (ISO 8573-1)	0/1		-	
Filter media	activated carbon, borosilicate micro fibres		Hopcalite, borosilicate micro fibres	
Operating temp. range [°C]	1,5 to 45		1,5 to 45	
DOMNICK HUNTER	AC		HC	
	DOMNICK HUNTER	OMEGA AIR	DOMNICK HUNTER	OMEGA AIR
	Oil-x plus		Oil-x plus	
	K 006 AC	ODH 006 AC/A2	K 006 HC	ODH 006 HC/H2
	K 013 AC	ODH 013 AC/A2	K 013 HC	ODH 013 HC/H2
	K 025 AC	ODH 025 AC/A	-	-
	K 040 AC	ODH 040 AC/A2	K 040 HC	ODH 040 HC/H2
	K 065 AC	ODH 065 AC/A	-	-
	K 085 AC	ODH 085 AC/A	-	-


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

DOMNICK HUNTER - oil-x plus

	PF	AO
	PF	AO
DOMNICK HUNTER Aluminium end caps		
Particle retention	3 µm	0,1 µm
Solids - q. class (ISO 8573-1)	6	2
Oils - q. class (ISO 8573-1)	-	2
Filter media	acrylic fibres, cellulose	borosilicate micro fibres
Operating temp. range [°C]	1,5 to 65	1,5 to 65
Diff. pressure (new) [mbar]	10	50

	PF				AO			
	DOMNICK HUNTER			OMEGA AIR	DOMNICK HUNTER			OMEGA AIR
	Oil-x plus	Oil-x	Oil-x 80		Oil-x plus	Oil-x	Oil-x 80	
	K 009 PF	K 006 PF	/	ODH 009 PF/P AL	K 009 AO	K 006 AO	/	ODH 009 AO/M AL
	K 017 PF	K 013 PF	E 007 PF	ODH 017 PF/P AL	K 017 AO	K 013 AO	E 007 AO	ODH 017 AO/M AL
	K 030 PF	K 025 PF	E 011 PF	ODH 030 PF/P AL	K 030 AO	K 025 AO	E 011 AO	ODH 030 AO/M AL
	K 058 PF	K 040 PF	E 035 PF	ODH 058 PF/P AL	K 058 AO	K 040 AO	E 035 AO	ODH 058 AO/M AL
	K 145 PF	K 085 PF	E 65 PF / E 060 PF	ODH 145 PF/P AL	K 145 AO	K 085 AO	E 65 AO / E 060 AO	ODH 145 AO/M AL
	K 220 PF	K 195 PF	E 120 PF	ODH 220 PF/P AL	K 220 AO	K 195 AO	E 120 AO	ODH 220 AO/M AL
	K 330 PF	K 295 PF	E 250 PF / E 200 PF	ODH 330 PF/P AL	K 330 AO	K 295 AO	E 250 AO / E 200 AO	ODH 330 AO/M AL
	K 430 PF	K 400 PF	N/A	ODH 430 PF/P AL	K 430 AO	K 400 AO	N/A	ODH 430 AO/M AL
	K 620 PF	K 500 PF	E 360 PF / E 300 PF	ODH 620 PF/P AL	K 620 AO	K 500 AO	E 360 AO / E 300 AO	ODH 620 AO/M AL

DOMNICK HUNTER Aluminium end caps	AA	ACS	
			
	Particle retention	0,01 µm	activated carbon
	Solids - q. class (ISO 8573-1)	1	1*
	Oils -q. class (ISO 8573-1)	1	1
	Filter media	borosilicate micro fibres	activated carbon
	Operating temp. range [°C]	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	80	60	

	AA			ACS		
	DOMNICK HUNTER			OMEGA AIR	DOMNICK HUNTER	OMEGA AIR
	Oil-x plus	Oil-x	Oil-x 80		Oil-x plus	
	K 009 AA	K 006 AA	/	ODH 009 AA/S AL	K 009 ACS	ODH 009 ACS/A AL
	K 017 AA	K 013 AA	E 007 AA	ODH 017 AA/S AL	K 017 ACS	ODH 017 ACS/A AL
	K 030 AA	K 025 AA	E 011 AA	ODH 030 AA/S AL	K 030 ACS	ODH 030 ACS/A AL
	K 058 AA	K 040 AA	E 035 AA	ODH 058 AA/S AL	K 058 ACS	ODH 058 ACS/A AL
	K 145 AA	K 085 AA	E 65 AA / E 060 AA	ODH 145 AA/S AL	K 145 ACS	ODH 145 ACS/A AL
	K 220 AA	K 195 AA	E 120 AA	ODH 220 AA/S AL	K 220 ACS	ODH 220 ACS/A AL
	K 330 AA	K 295 AA	E 250 AA / E 200 AA	ODH 330 AA/S AL	K 330 ACS	ODH 330 ACS/A AL
	K 430 AA	K 400 AA	N/A	ODH 430 AA/S AL	K 430 ACS	ODH 430 ACS/A AL
	K 620 AA	K 500 AA	E 360 AA / E 300 AA	ODH 620 AA/S AL	K 620 ACS	ODH 620 ACS/A AL

* Valid if "S" filter cartridge is installed upstream.


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

DOMNICK HUNTER HT

	AO	AA
		
DOMNICK HUNTER Aluminium end caps		
Particle retention	0,1 µm	0,01 µm
Solids - q. class (ISO 8573-1)	2	1
Oils -q. class (ISO 8573-1)	2	1
Filter media	borosilicate micro fibres	
Operating temp. range [°C]	1,5 to 65	1,5 to 65
Diff. pressure (new) [mbar]	50	80

	AO		AA	
	DOMNICK HUNTER	OMEGA AIR	DOMNICK HUNTER	OMEGA AIR
K009 AO TS	ODH 009 AO/M HT AL		K009 AA TS	ODH 009 AA/S HT AL
K017 AO TS	ODH 017 AO/M HT AL		K017 AA TS	ODH 017 AA/S HT AL
K030 AO TS	ODH 030 AO/M HT AL		K030 AA TS	ODH 030 AA/S HT AL
K058 AO TS	ODH 058 AO/M HT AL		K058 AA TS	ODH 058 AA/S HT AL
K145 AO TS	ODH 145 AO/M HT AL		K145 AA TS	ODH 145 AA/S HT AL
K220 AO TS	ODH 220 AO/M HT AL		K220 AA TS	ODH 220 AA/S HT AL
K330 AO TS	ODH 330 AO/M HT AL		K330 AA TS	ODH 330 AA/S HT AL
K430 AO TS	ODH 430 AO/M HT AL		K430 AA TS	ODH 430 AA/S HT AL
K620 AO TS	ODH 620 AO/M HT AL		K620 AA TS	ODH 620 AA/S HT AL

* Valid if "S" filter cartridge is installed upstream.



ALTERNATIVE FILTER ELEMENTS

DOMNICK HUNTER NH3

	AO	AA
	DOMNICK HUNTER	DOMNICK HUNTER
Aluminium end caps		
Particle retention	0,1 µm	0,01 µm
Solids - q. class (ISO 8573-1)	2	1
Oils -q. class (ISO 8573-1)	2	1
Filter media	borosilicate micro fibres	
Operating temp. range [°C]	1,5 to 65	1,5 to 65
Diff. pressure (new) [mbar]	50	80


	AO		AA	
	DOMNICK HUNTER	OMEGA AIR	DOMNICK HUNTER	OMEGA AIR
E120AO NH3	ODH 220 AO/M NH3 AL		E120AA NH3	ODH 220 AA/S NH3 AL
E250AO NH3	ODH 330 AO/M NH3 AL		E250AA NH3	ODH 330 AA/S NH3 AL
E360AO NH3	ODH 620 AO/M NH3 AL		E360AA NH3	ODH 620 AA/S NH3 AL

* Valid if "S" filter cartridge is installed upstream.


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

DONALDSON DF

	P	V	M	S	A
DONALDSON DF Plastic end caps					
Particle retention	3 µm	1 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	3	2	1	1*
Oils - q. class (ISO 8573-1)	-	-	2	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres			activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	20	50	80	60

	P		V		M		S		A	
	DONALDSON	OMEGA AIR	DONALDSON	OMEGA AIR	DONALDSON	OMEGA AIR	DONALDSON	OMEGA AIR	DONALDSON	OMEGA AIR
	DF P 0035	ODO DF 0035 P/P	DF V 0035	ODO DF 0035 V/R	DF M 0035	ODO DF 0035 M/M	DF S 0035	ODO DF 0035 S/S	DF A 0035	ODO DF 0035 A/A
	DF P 0070	ODO DF 0070 P/P	DF V 0070	ODO DF 0070 V/R	DF M 0070	ODO DF 0070 M/M	DF S 0070	ODO DF 0070 S/S	DF A 0070	ODO DF 0070 A/A
	DF P 0120	ODO DF 0120 P/P	DF V 0120	ODO DF 0120 V/R	DF M 0120	ODO DF 0120 M/M	DF S 0120	ODO DF 0120 S/S	DF A 0120	ODO DF 0120 A/A
	DF P 0210	ODO DF 0210 P/P	DF V 0210	ODO DF 0210 V/R	DF M 0210	ODO DF 0210 M/M	DF S 0210	ODO DF 0210 S/S	DF A 0210	ODO DF 0210 A/A
	DF P 0320	ODO DF 0320 P/P	DF V 0320	ODO DF 0320 V/R	DF M 0320	ODO DF 0320 M/M	DF S 0320	ODO DF 0320 S/S	DF A 0320	ODO DF 0320 A/A
	DF P 0450	ODO DF 0450 P/P	DF V 0450	ODO DF 0450 V/R	DF M 0450	ODO DF 0450 M/M	DF S 0450	ODO DF 0450 S/S	DF A 0450	ODO DF 0450 A/A
	DF P 0600	ODO DF 0600 P/P	DF V 0600	ODO DF 0600 V/R	DF M 0600	ODO DF 0600 M/M	DF S 0600	ODO DF 0600 S/S	DF A 0600	ODO DF 0600 A/A
	DF P 0750	ODO DF 0750 P/P	DF V 0750	ODO DF 0750 V/R	DF M 0750	ODO DF 0750 M/M	DF S 0750	ODO DF 0750 S/S	DF A 0750	ODO DF 0750 A/A
	DF P 1100	ODO DF 1100 P/P	DF V 1100	ODO DF 1100 V/R	DF M 1100	ODO DF 1100 M/M	DF S 1100	ODO DF 1100 S/S	DF A 1100	ODO DF 1100 A/A

* Valid if "S" filter cartridge is installed upstream.

OMEGA AIR

Air and Gas


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

DONALDSON '90 series

DONALDSON '90 SERIES Plastic end caps	SB	PE	PE	FF
Particle retention	25 µm	25 µm	3 µm	0,1 µm
Solids - q. class (ISO 8573-1)	-	-	6	2
Oils -q. class (ISO 8573-1)	-	-	-	2
Filter media	sintered brass	sintered polyethylene	acrylic fibres, cellulose	borosilicate micro fibres
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 65
Diff. pressure (new) [mbar]	20	10	10	50

	SB		PE		PE		FF	
	DONALDSON	OMEGA AIR	DONALDSON	OMEGA AIR	DONALDSON	OMEGA AIR	DONALDSON	OMEGA AIR
	SB 02/05	ODO 0205 SB	PE 02/05	ODO 0205 PE	PE 02/05	ODO 0205 PE/P	FF 02/05	ODO 0205 FF
	/	ODO 0210 SB	/	ODO 0210 PE	/	ODO 0210 PE/P	/	ODO 0210 FF
	SB 03/05	ODO 0305 SB	PE 03/05	ODO 0305 PE	PE 03/05	ODO 0305 PE/P	FF 03/05	ODO 0305 FF
	SB 03/10	ODO 0310 SB	PE 03/10	ODO 0310 PE	PE 03/10	ODO 0310 PE/P	FF 03/10	ODO 0310 FF
	SB 04/10	ODO 0410 SB	PE 04/10	ODO 0410 PE	PE 04/10	ODO 0410 PE/P	FF 04/10	ODO 0410 FF
	SB 04/20	ODO 0420 SB	PE 04/20	ODO 0420 PE	PE 04/20	ODO 0420 PE/P	FF 04/20	ODO 0420 FF
	SB 05/20	ODO 0520 SB	PE 05/20	ODO 0520 PE	PE 05/20	ODO 0520 PE/P	FF 05/20	ODO 0520 FF
	SB 05/25	ODO 0525 SB	PE 05/25	ODO 0525 PE	PE 05/25	ODO 0525 PE/P	FF 05/25	ODO 0525 FF
	SB 07/25	ODO 0725 SB	PE 07/25	ODO 0725 PE	PE 07/25	ODO 0725 PE/P	FF 07/25	ODO 0725 FF
	SB 07/30	ODO 0730 SB	PE 07/30	ODO 0730 PE	PE 07/30	ODO 0730 PE/P	FF 07/30	ODO 0730 FF
	SB 10/30	ODO 1030 SB	PE 10/30	ODO 1030 PE	PE 10/30	ODO 1030 PE/P	FF 10/30	ODO 1030 FF
	SB 15/30	ODO 1530 SB	PE 15/30	ODO 1530 PE	PE 15/30	ODO 1530 PE/P	FF 15/30	ODO 1530 FF
	SB 20/30	ODO 2030 SB	PE 20/30	ODO 2030 PE	PE 20/30	ODO 2030 PE/P	FF 20/30	ODO 2030 FF
	SB 30/30	ODO 3030 SB	PE 30/30	ODO 3030 PE	PE 30/30	ODO 3030 PE/P	FF 30/30	ODO 3030 FF
	SB 30/50	ODO 3050 SB	PE 30/50	ODO 3050 PE	PE 30/50	ODO 3050 PE/P	FF 30/50	ODO 3050 FF

* Valid if "S" filter cartridge is installed upstream.

MF	SMF	AK
		
0,1 µm	0,01 µm	activated carbon
2	1	1*
1	1	1
		activated carbon
1,5 to 65	1,5 to 65	1,5 to 45
70	80	60

MF		SMF		AK	
DONALDSON	OMEGA AIR	DONALDSON	OMEGA AIR	DONALDSON	OMEGA AIR
MF 02/05	ODO 0205 MF	SMF 02/05	ODO 0205 SMF	AK 02/05	ODO 0205 AK/A
/	ODO 0210 MF	/	ODO 0210 SMF	/	ODO 0210 AK/A
MF 03/05	ODO 0305 MF	SMF 03/05	ODO 0305 SMF	AK 03/05	ODO 0305 AK/A
MF 03/10	ODO 0310 MF	SMF 03/10	ODO 0310 SMF	AK 03/10	ODO 0310 AK/A
MF 04/10	ODO 0410 MF	SMF 04/10	ODO 0410 SMF	AK 04/10	ODO 0410 AK/A
MF 04/20	ODO 0420 MF	SMF 04/20	ODO 0420 SMF	AK 04/20	ODO 0420 AK/A
MF 05/20	ODO 0520 MF	SMF 05/20	ODO 0520 SMF	AK 05/20	ODO 0520 AK/A
MF 05/25	ODO 0525 MF	SMF 05/25	ODO 0525 SMF	AK 05/25	ODO 0525 AK/A
MF 07/25	ODO 0725 MF	SMF 07/25	ODO 0725 SMF	AK 07/25	ODO 0725 AK/A
MF 07/30	ODO 0730 MF	SMF 07/30	ODO 0730 SMF	AK 07/30	ODO 0730 AK/A
MF 10/30	ODO 1030 MF	SMF 10/30	ODO 1030 SMF	AK 10/30	ODO 1030 AK/A
MF 15/30	ODO 1530 MF	SMF 15/30	ODO 1530 SMF	AK 15/30	ODO 1530 AK/A
MF 20/30	ODO 2030 MF	SMF 20/30	ODO 2030 SMF	AK 20/30	ODO 2030 AK/A
MF 30/30	ODO 3030 MF	SMF 30/30	ODO 3030 SMF	AK 30/30	ODO 3030 AK/A
MF 30/50	ODO 3050 MF	SMF 30/50	ODO 3050 SMF	AK 30/50	ODO 3050 AK/A


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

DONALDSON '90 series

DONALDSON '90 SERIES Aluminium end caps	SB	PE	PE	FF
Particle retention	25 µm	25 µm	3 µm	0,1 µm
Solids - q. class (ISO 8573-1)	-	-	6	2
Oils -q. class (ISO 8573-1)	-	-	-	2
Filter media	sintered brass	sintered polyethylene	acrylic fibres, cellulose	borosilicate micro fibres
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 65
Diff. pressure (new) [mbar]	20	10	10	50

	SB		PE		PE		FF	
	DONALDSON	OMEGA AIR	DONALDSON	OMEGA AIR	DONALDSON	OMEGA AIR	DONALDSON	OMEGA AIR
	SB 02/05	ODO 0205 SB AL	PE 02/05	ODO 0205 PE AL	PE 02/05	ODO 0205 PE/P AL	FF 02/05	ODO 0205 FF AL
	/	ODO 0210 SB AL	/	ODO 0210 PE AL	/	ODO 0210 PE/P AL	/	ODO 0210 FF AL
	SB 03/05	ODO 0305 SB AL	PE 03/05	ODO 0305 PE AL	PE 03/05	ODO 0305 PE/P AL	FF 03/05	ODO 0305 FF AL
	SB 03/10	ODO 0310 SB AL	PE 03/10	ODO 0310 PE AL	PE 03/10	ODO 0310 PE/P AL	FF 03/10	ODO 0310 FF AL
	SB 04/10	ODO 0410 SB AL	PE 04/10	ODO 0410 PE AL	PE 04/10	ODO 0410 PE/P AL	FF 04/10	ODO 0410 FF AL
	SB 04/20	ODO 0420 SB AL	PE 04/20	ODO 0420 PE AL	PE 04/20	ODO 0420 PE/P AL	FF 04/20	ODO 0420 FF AL
	SB 05/20	ODO 0520 SB AL	PE 05/20	ODO 0520 PE AL	PE 05/20	ODO 0520 PE/P AL	FF 05/20	ODO 0520 FF AL
	SB 05/25	ODO 0525 SB AL	PE 05/25	ODO 0525 PE AL	PE 05/25	ODO 0525 PE/P AL	FF 05/25	ODO 0525 FF AL
	SB 07/25	ODO 0725 SB AL	PE 07/25	ODO 0725 PE AL	PE 07/25	ODO 0725 PE/P AL	FF 07/25	ODO 0725 FF AL
	SB 07/30	ODO 0730 SB AL	PE 07/30	ODO 0730 PE AL	PE 07/30	ODO 0730 PE/P AL	FF 07/30	ODO 0730 FF AL
	SB 10/30	ODO 1030 SB AL	PE 10/30	ODO 1030 PE AL	PE 10/30	ODO 1030 PE/P AL	FF 10/30	ODO 1030 FF AL
	SB 15/30	ODO 1530 SB AL	PE 15/30	ODO 1530 PE AL	PE 15/30	ODO 1530 PE/P AL	FF 15/30	ODO 1530 FF AL
	SB 20/30	ODO 2030 SB AL	PE 20/30	ODO 2030 PE AL	PE 20/30	ODO 2030 PE/P AL	FF 20/30	ODO 2030 FF AL
	SB 30/30	ODO 3030 SB AL	PE 30/30	ODO 3030 PE AL	PE 30/30	ODO 3030 PE/P AL	FF 30/30	ODO 3030 FF AL
	SB 30/50	ODO 3050 SB AL	PE 30/50	ODO 3050 PE AL	PE 30/50	ODO 3050 PE/P AL	FF 30/50	ODO 3050 FF AL

* Valid if "S" filter cartridge is installed upstream.


MF	SMF	AK
		
0,1 µm	0,01 µm	activated carbon
2	1	1*
1	1	1
		activated carbon
1,5 to 65	1,5 to 65	1,5 to 45
70	80	60

MF		SMF		AK	
DONALDSON	OMEGA AIR	DONALDSON	OMEGA AIR	DONALDSON	OMEGA AIR
MF 02/05	ODO 0205 MF AL	SMF 02/05	ODO 0205 SMF AL	AK 02/05	ODO 0205 AK/A AL
	ODO 0210 MF AL		ODO 0210 SMF AL		ODO 0210 AK/A AL
MF 03/05	ODO 0305 MF AL	SMF 03/05	ODO 0305 SMF AL	AK 03/05	ODO 0305 AK/A AL
MF 03/10	ODO 0310 MF AL	SMF 03/10	ODO 0310 SMF AL	AK 03/10	ODO 0310 AK/A AL
MF 04/10	ODO 0410 MF AL	SMF 04/10	ODO 0410 SMF AL	AK 04/10	ODO 0410 AK/A AL
MF 04/20	ODO 0420 MF AL	SMF 04/20	ODO 0420 SMF AL	AK 04/20	ODO 0420 AK/A AL
MF 05/20	ODO 0520 MF AL	SMF 05/20	ODO 0520 SMF AL	AK 05/20	ODO 0520 AK/A AL
MF 05/25	ODO 0525 MF AL	SMF 05/25	ODO 0525 SMF AL	AK 05/25	ODO 0525 AK/A AL
MF 07/25	ODO 0725 MF AL	SMF 07/25	ODO 0725 SMF AL	AK 07/25	ODO 0725 AK/A AL
MF 07/30	ODO 0730 MF AL	SMF 07/30	ODO 0730 SMF AL	AK 07/30	ODO 0730 AK/A AL
MF 10/30	ODO 1030 MF AL	SMF 10/30	ODO 1030 SMF AL	AK 10/30	ODO 1030 AK/A AL
MF 15/30	ODO 1530 MF AL	SMF 15/30	ODO 1530 SMF AL	AK 15/30	ODO 1530 AK/A AL
MF 20/30	ODO 2030 MF AL	SMF 20/30	ODO 2030 SMF AL	AK 20/30	ODO 2030 AK/A AL
MF 30/30	ODO 3030 MF AL	SMF 30/30	ODO 3030 SMF AL	AK 30/30	ODO 3030 AK/A AL
MF 30/50	ODO 3050 MF AL	SMF 30/50	ODO 3050 SMF AL	AK 30/50	ODO 3050 AK/A AL


**OMEGA
AIR**

ALTERNATIVE FILTER ELEMENTS

DONALDSON '80 series

DONALDSON '80 SERIES Aluminium end caps	PE	FF	MF
			
Particle retention	3 µm	0,1 µm	0,1 µm
Solids - q. class (ISO 8573-1)	6	2	2
Oils -q. class (ISO 8573-1)	-	2	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres	
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65
Diff. pressure (new) [mbar]	10	50	70

	PE		FF		MF	
	DONALDSON	OMEGA AIR	DONALDSON	OMEGA AIR	DONALDSON	OMEGA AIR
	PE 03/1	ODO 031 PE/P AL	FF 03/1	ODO 031 FF AL	MF 03/1	ODO 031 MF AL
	PE 03/1,5	ODO 031.5 PE/P AL	FF 03/1,5	ODO 031.5 FF AL	MF 03/1,5	ODO 031.5 MF AL
	PE 04/1,5	ODO 041.5 PE/P AL	FF 04/1,5	ODO 041.5 FF AL	MF 04/1,5	ODO 041.5 MF AL
	PE 04/2,5	ODO 042.5 PE/P AL	FF 04/2,5	ODO 042.5 FF AL	MF 04/2,5	ODO 042.5 MF AL
	PE 05/2,5	ODO 052.5 PE/P AL	FF 05/2,5	ODO 052.5 FF AL	MF 05/2,5	ODO 052.5 MF AL
	PE 05/3	ODO 053 PE/P AL	FF 05/3	ODO 053 FF AL	MF 05/3	ODO 053 MF AL
	PE 10/3	ODO 103 PE/P AL	FF 10/3	ODO 103 FF AL	MF 10/3	ODO 103 MF AL
	PE 15/3	ODO 153 PE/P AL	FF 15/3	ODO 153 FF AL	MF 15/3	ODO 153 MF AL
	PE 20/3	ODO 203 PE/P AL	FF 20/3	ODO 203 FF AL	MF 20/3	ODO 203 MF AL
	PE 30/3	ODO 303 PE/P AL	FF 30/3	ODO 303 FF AL	MF 30/3	ODO 303 MF AL
	PE 30/5	ODO 305 PE/P AL	FF 30/5	ODO 305 FF AL	MF 30/5	ODO 305 MF AL

* Valid if "S" filter cartridge is installed upstream.

SMF	AK
	
0,01 µm	activated carbon
1	1*
1	1
	activated carbon
1,5 to 65	1,5 to 45
80	60

SMF		AK	
DONALDSON	OMEGA AIR	DONALDSON	OMEGA AIR
SMF 03/1	ODO 031 SMF AL	AK 03/1	ODO 031 AK/A AL
SMF 03/1,5	ODO 031.5 SMF AL	AK 03/1,5	ODO 031.5 AK/A AL
SMF 04/1,5	ODO 041.5 SMF AL	AK 04/1,5	ODO 041.5 AK/A AL
SMF 04/2,5	ODO 042.5 SMF AL	AK 04/2,5	ODO 042.5 AK/A AL
SMF 05/2,5	ODO 052.5 SMF AL	AK 05/2,5	ODO 052.5 AK/A AL
SMF 05/3	ODO 053 SMF AL	AK 05/3	ODO 053 AK/A AL
SMF 10/3	ODO 103 SMF AL	AK 10/3	ODO 103 AK/A AL
SMF 15/3	ODO 153 SMF AL	AK 15/3	ODO 153 AK/A AL
SMF 20/3	ODO 203 SMF AL	AK 20/3	ODO 203 AK/A AL
SMF 30/3	ODO 303 SMF AL	AK 30/3	ODO 303 AK/A AL
SMF 30/5	ODO 305 SMF AL	AK 30/5	ODO 305 AK/A AL


OMEGA
AIR

ALTERNATIVE SILICONE AND GREASE FREE FILTER ELEMENTS

DONALDSON

	PEP	FFP	MFP
DONALDSON Silicone and grease free, plastic end cap			
Particle retention	3 µm	0,1 µm	0,1 µm
Solids - q. class (ISO 8573-1)	6	2	2
Oils -q. class (ISO 8573-1)	-	2	2
Filter media	acrylic fibres, cellulose	borosilicate micro fibres	
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65
Diff. pressure (new) [mbar]	10	50	50

	PEP		FFP		MFP	
	DONALDSON	OMEGA AIR	DONALDSON	OMEGA AIR	DONALDSON	OMEGA AIR
	PEP 02/05	ODO 0205 PEP/P	FFP 02/05	ODO 0205 FFP	MFP 02/05	ODO 0205 MFP
	PEP 03/05	ODO 0305 PEP/P	FFP 03/05	ODO 0305 FFP	MFP 03/05	ODO 0305 MFP
	PEP 03/10	ODO 0310 PEP/P	FFP 03/10	ODO 0310 FFP	MFP 03/10	ODO 0310 MFP
	PEP 04/10	ODO 0410 PEP/P	FFP 04/10	ODO 0410 FFP	MFP 04/10	ODO 0410 MFP
	PEP 04/20	ODO 0420 PEP/P	FFP 04/20	ODO 0420 FFP	MFP 04/20	ODO 0420 MFP
	PEP 05/20	ODO 0520 PEP/P	FFP 05/20	ODO 0520 FFP	MFP 05/20	ODO 0520 MFP
	PEP 05/25	ODO 0525 PEP/P	FFP 05/25	ODO 0525 FFP	MFP 05/25	ODO 0525 MFP
	PEP 07/25	ODO 0725 PEP/P	FFP 07/25	ODO 0725 FFP	MFP 07/25	ODO 0725 MFP
	PEP 07/30	ODO 0730 PEP/P	FFP 07/30	ODO 0730 FFP	MFP 07/30	ODO 0730 MFP
	PEP 10/30	ODO 1030 PEP/P	FFP 10/30	ODO 1030 FFP	MFP 10/30	ODO 1030 MFP
	PEP 15/30	ODO 1530 PEP/P	FFP 15/30	ODO 1530 FFP	MFP 15/30	ODO 1530 MFP
	PEP 20/30	ODO 2030 PEP/P	FFP 20/30	ODO 2030 FFP	MFP 20/30	ODO 2030 MFP
	PEP 30/30	ODO 3030 PEP/P	FFP 30/30	ODO 3030 FFP	MFP 30/30	ODO 3030 MFP
	PEP 30/50	ODO 3050 PEP/P	FFP 30/50	ODO 3050 FFP	MFP 30/50	ODO 3050 MFP

* Valid if "S" filter cartridge is installed upstream.

SMFP	AKP
	
0,01 µm	activated carbon
1	1*
1	1
borosilicate micro fibres	activated carbon
1,5 to 65	1,5 to 45
80	60

SMFP		AKP	
DONALDSON	OMEGA AIR	DONALDSON	OMEGA AIR
SMFP 02/05	ODO 0205 SMFP	AKP 02/05	ODO 0205 AKP
SMFP 03/05	ODO 0305 SMFP	AKP 03/05	ODO 0305 AKP
SMFP 03/10	ODO 0310 SMFP	AKP 03/10	ODO 0310 AKP
SMFP 04/10	ODO 0410 SMFP	AKP 04/10	ODO 0410 AKP
SMFP 04/20	ODO 0420 SMFP	AKP 04/20	ODO 0420 AKP
SMFP 05/20	ODO 0520 SMFP	AKP 05/20	ODO 0520 AKP
SMFP 05/25	ODO 0525 SMFP	AKP 05/25	ODO 0525 AKP
SMFP 07/25	ODO 0725 SMFP	AKP 07/25	ODO 0725 AKP
SMFP 07/30	ODO 0730 SMFP	AKP 07/30	ODO 0730 AKP
SMFP 10/30	ODO 1030 SMFP	AKP 10/30	ODO 1030 AKP
SMFP 15/30	ODO 1530 SMFP	AKP 15/30	ODO 1530 AKP
SMFP 20/30	ODO 2030 SMFP	AKP 20/30	ODO 2030 AKP
SMFP 30/30	ODO 3030 SMFP	AKP 30/30	ODO 3030 AKP
SMFP 30/50	ODO 3050 SMFP	AKP 30/50	ODO 3050 AKP


OMEGA
AIR

ALTERNATIVE SILICONE AND GREASE FREE FILTER ELEMENTS

DONALDSON

	PEP	FFP	MFP
DONALDSON Silicone and grease free, aluminium end cap			
Particle retention	3 µm	0,1 µm	0,1 µm
Solids - q. class (ISO 8573-1)	6	2	2
Oils -q. class (ISO 8573-1)	-	2	2
Filter media	acrylic fibres, cellulose	borosilicate micro fibres	
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65
Diff. pressure (new) [mbar]	10	50	50

	PEP		FFP		MFP	
	DONALDSON	OMEGA AIR	DONALDSON	OMEGA AIR	DONALDSON	OMEGA AIR
	PEP 02/05	ODO 0205 PEP/P AL	FFP 02/05	ODO 0205 FFP AL	MFP 02/05	ODO 0205 MFP AL
	PEP 03/05	ODO 0305 PEP/P AL	FFP 03/05	ODO 0305 FFP AL	MFP 03/05	ODO 0305 MFP AL
	PEP 03/10	ODO 0310 PEP/P AL	FFP 03/10	ODO 0310 FFP AL	MFP 03/10	ODO 0310 MFP AL
	PEP 04/10	ODO 0410 PEP/P AL	FFP 04/10	ODO 0410 FFP AL	MFP 04/10	ODO 0410 MFP AL
	PEP 04/20	ODO 0420 PEP/P AL	FFP 04/20	ODO 0420 FFP AL	MFP 04/20	ODO 0420 MFP AL
	PEP 05/20	ODO 0520 PEP/P AL	FFP 05/20	ODO 0520 FFP AL	MFP 05/20	ODO 0520 MFP AL
	PEP 05/25	ODO 0525 PEP/P AL	FFP 05/25	ODO 0525 FFP AL	MFP 05/25	ODO 0525 MFP AL
	PEP 07/25	ODO 0725 PEP/P AL	FFP 07/25	ODO 0725 FFP AL	MFP 07/25	ODO 0725 MFP AL
	PEP 07/30	ODO 0730 PEP/P AL	FFP 07/30	ODO 0730 FFP AL	MFP 07/30	ODO 0730 MFP AL
	PEP 10/30	ODO 1030 PEP/P AL	FFP 10/30	ODO 1030 FFP AL	MFP 10/30	ODO 1030 MFP AL
	PEP 15/30	ODO 1530 PEP/P AL	FFP 15/30	ODO 1530 FFP AL	MFP 15/30	ODO 1530 MFP AL
	PEP 20/30	ODO 2030 PEP/P AL	FFP 20/30	ODO 2030 FFP AL	MFP 20/30	ODO 2030 MFP AL
	PEP 30/30	ODO 3030 PEP/P AL	FFP 30/30	ODO 3030 FFP AL	MFP 30/30	ODO 3030 MFP AL
	PEP 30/50	ODO 3050 PEP/P AL	FFP 30/50	ODO 3050 FFP AL	MFP 30/50	ODO 3050 MFP AL

SMFP	AKP
	
0,01 µm	activated carbon
1	1*
1	1
borosilicate micro fibres	activated carbon
1,5 to 65	1,5 to 45
80	60



SMFP		AKP	
DONALDSON	OMEGA AIR	DONALDSON	OMEGA AIR
SMFP 02/05	ODO 0205 SMFP AL	AKP 02/05	ODO 0205 AKP AL
SMFP 03/05	ODO 0305 SMFP AL	AKP 03/05	ODO 0305 AKP AL
SMFP 03/10	ODO 0310 SMFP AL	AKP 03/10	ODO 0310 AKP AL
SMFP 04/10	ODO 0410 SMFP AL	AKP 04/10	ODO 0410 AKP AL
SMFP 04/20	ODO 0420 SMFP AL	AKP 04/20	ODO 0420 AKP AL
SMFP 05/20	ODO 0520 SMFP AL	AKP 05/20	ODO 0520 AKP AL
SMFP 05/25	ODO 0525 SMFP AL	AKP 05/25	ODO 0525 AKP AL
SMFP 07/25	ODO 0725 SMFP AL	AKP 07/25	ODO 0725 AKP AL
SMFP 07/30	ODO 0730 SMFP AL	AKP 07/30	ODO 0730 AKP AL
SMFP 10/30	ODO 1030 SMFP AL	AKP 10/30	ODO 1030 AKP AL
SMFP 15/30	ODO 1530 SMFP AL	AKP 15/30	ODO 1530 AKP AL
SMFP 20/30	ODO 2030 SMFP AL	AKP 20/30	ODO 2030 AKP AL
SMFP 30/30	ODO 3030 SMFP AL	AKP 30/30	ODO 3030 AKP AL
SMFP 30/50	ODO 3050 SMFP AL	AKP 30/50	ODO 3050 AKP AL

* Valid if "S" filter cartridge is installed upstream.



OMEGA
AIR

ALTERNATIVE STERILE/VENT FILTER ELEMENTS

DONALDSON

	P-SRF	P-BE
DONALDSON STERILE Stainless steel end caps 1.4301 (304)		
Particle retention	0,01 µm	0,01 µm
Solids - q. class (ISO 8573-1)	1	1
Oils -q. class (ISO 8573-1)	-	-
Filter media	borosilicate micro fibres	
Operating temp. range [°C]	-20 to 150	-20 to 150
Diff. pressure (new) [mbar]	80 mbar	80 mbar

	P-SRF				P-BE	
	DONALDSON	ZANDER	DOMNICK HUNTER	OMEGA AIR	DONALDSON	OMEGA AIR
	P-SRF 02/10	PST-R 02/10	ME 02/10	ODO 0210 P-SRF	P-BE 03/10	ODO 0310 P-BE
	P-SRF 03/10	PST-R 03/10	ME 03/10	ODO 0310 P-SRF	P-BE 05/25	ODO 0525 P-BE
	P-SRF 04/10	PST-R 04/10	ME 04/10	ODO 0410 P-SRF	P-BE 05/30	ODO 0530 P-BE
	P-SRF 04/20	PST-R 04/20	ME 04/20	ODO 0420 P-SRF	P-BE 10/30	ODO 1030 P-BE
	P-SRF 05/20	PST-R 05/20	ME 05/20	ODO 0520 P-SRF	P-BE 20/30	ODO 2030 P-BE
	P-SRF 05/25	PST-R 05/25	ME 05/25	ODO 0525 P-SRF	P-BE 30/30	ODO 3030 P-BE
	P-SRF 07/25	PST-R 07/25	ME 07/25	ODO 0725 P-SRF		
	P-SRF 05/30	PST-R 05/30	ME 05/30	ODO 0530 P-SRF		
	P-SRF 07/30	PST-R 07/30	ME 07/30	ODO 0730 P-SRF		
	P-SRF 10/30	PST-R 10/30	ME 10/30	ODO 1030 P-SRF		
	P-SRF 15/30	PST-R 15/30	ME 15/30	ODO 1530 P-SRF		
	P-SRF 20/30	PST-R 20/30	ME 20/30	ODO 2030 P-SRF		
	P-SRF 30/30	PST-R 30/30	ME 30/30	ODO 3030 P-SRF		
	P-SRF 30/50	PST-R 30/50	ME 30/50	ODO 3050 P-SRF		

DONALDSON STERILE Stainless steel end caps 1.4301 (304)	SRF (90' series)	SRF (80' series)
		
Particle retention	0,01 µm	0,01 µm
Solids - q. class (ISO 8573-1)	1	1
Oils - q. class (ISO 8573-1)	-	-
Filter media	borosilicate micro fibres	
Operating temp. range [°C]	-20 to 150	-20 to 150
Diff. pressure (new) [mbar]	80 mbar	80 mbar

	SRF (90' series)				SRF (80' series)			
	DONALDSON	ZANDER	DOMNICK HUNTER	OMEGA AIR	DONALDSON	ZANDER	DOMNICK HUNTER	OMEGA AIR
	SRF 02/10	ST-R 02/10	MER 02/10	ODO 0210 SRF	SRF 3/1	ST-R 3/1	ME 3/1	ODO 031 SRF
	SRF 03/10	ST-R 03/10	MER 03/10	ODO 0310 SRF	SRF 3/1,5	ST-R 3/1,5	ME 3/1,5	ODO 031,5 SRF
	SRF 04/10	ST-R 04/10	MER 04/10	ODO 0410 SRF	SRF 4/1,5	ST-R 4/1,5	ME 4/1,5	ODO 041,5 SRF
	SRF 04/20	ST-R 04/20	MER 04/20	ODO 0420 SRF	SRF 4/2,5	ST-R 4/2,5	ME 4/2,5	ODO 042,5 SRF
	SRF 05/20	ST-R 05/20	MER 05/20	ODO 0520 SRF	SRF 5/2,5	ST-R 5/2,5	ME 5/2,5	ODO 052,5 SRF
	SRF 05/25	ST-R 05/25	MER 05/25	ODO 0525 SRF	SRF 5/3	ST-R 5/3	ME 5/3	ODO 053 SRF
	SRF 07/25	ST-R 07/25	MER 07/25	ODO 0725 SRF	SRF 10/3	ST-R 10/3	ME 10/3	ODO 103 SRF
	SRF 05/30	ST-R 05/30	MER 05/30	ODO 0530 SRF	SRF 15/3	ST-R 15/3	ME 15/3	ODO 153 SRF
	SRF 07/30	ST-R 07/30	MER 07/30	ODO 0730 SRF	SRF 20/3	ST-R 20/3	ME 20/3	ODO 203 SRF
	SRF 10/30	ST-R 10/30	MER 10/30	ODO 1030 SRF	SRF 30/3	ST-R 30/3	ME 30/3	ODO 303 SRF
	SRF 15/30	ST-R 15/30	MER 15/30	ODO 1530 SRF	SRF 30/5	ST-R 30/5	ME 30/5	ODO 305 SRF
	SRF 20/30	ST-R 20/30	MER 20/30	ODO 2030 SRF				
	SRF 30/30	ST-R 30/30	MER 30/30	ODO 3030 SRF				
	SRF 30/50	ST-R 30/50	MER 30/50	ODO 3050 SRF				


OMEGA
AIR

ALTERNATIVE PROCESS FILTER ELEMENTS

DONALDSON

DONALDSON PROCESS Stainless steel end caps 1.4301 (304)	P-SM (25 µm)	P-SM (5 µm)	P-GS (20 µm)	
				
	Particle retention	25 µm	5 µm	20 µm
	Solids - q. class (ISO 8573-1)	-	-	-
	Oils -q. class (ISO 8573-1)	-	-	-
Filter media	stainless steel mesh		sintered inox	
Operating temp. range [°C]	0 to 150	0 to 150	0 to 150	
Diff. pressure (new) [mbar]	60	60	60	

	P-SM (25 µm)		P-SM (5 µm)		P-GS (20 µm)	
	DONALDSON	OMEGA AIR	DONALDSON	OMEGA AIR	DONALDSON	OMEGA AIR
P-SM 02/05 25 µm	000 0205 P-SM (25µm)		P-SM 02/05 5 µm	000 0205 P-SM (5µm)	P-GS 02/05 25µm	/
P-SM 03/05 25 µm	000 0305 P-SM (25µm)		P-SM 03/05 5 µm	000 0305 P-SM (5µm)	P-GS 03/05 25µm	/
P-SM 03/10 25 µm	000 0310 P-SM (25µm)		P-SM 03/10 5 µm	000 0310 P-SM (5µm)	P-GS 03/10 25µm	000 0310 P-GS (20µm)
P-SM 04/10 25 µm	000 0410 P-SM (25µm)		P-SM 04/10 5 µm	000 0410 P-SM (5µm)	P-GS 04/10 25µm	000 0410 P-GS (20µm)
P-SM 04/20 25 µm	000 0420 P-SM (25µm)		P-SM 04/20 5 µm	000 0420 P-SM (5µm)	P-GS 04/20 25µm	000 0420 P-GS (20µm)
P-SM 05/20 25 µm	000 0520 P-SM (25µm)		P-SM 05/20 5 µm	000 0520 P-SM (5µm)	P-GS 05/20 25µm	000 0520 P-GS (20µm)
P-SM 05/25 25 µm	000 0525 P-SM (25µm)		P-SM 05/25 5 µm	000 0525 P-SM (5µm)	P-GS 05/25 25µm	000 0525 P-GS (20µm)
P-SM 07/25 25 µm	000 0725 P-SM (25µm)		P-SM 07/25 5 µm	000 0725 P-SM (5µm)	P-GS 07/25 25µm	000 0725 P-GS (20µm)
P-SM 07/30 25 µm	000 0730 P-SM (25µm)		P-SM 07/30 5 µm	000 0730 P-SM (5µm)	P-GS 07/30 25µm	000 0730 P-GS (20µm)
P-SM 10/30 25 µm	000 1030 P-SM (25µm)		P-SM 10/30 5 µm	000 1030 P-SM (5µm)	P-GS 10/30 25µm	000 1030 P-GS (20µm)
P-SM 15/30 25 µm	000 1530 P-SM (25µm)		P-SM 15/30 5 µm	000 1530 P-SM (5µm)	P-GS 15/30 25µm	000 1530 P-GS (20µm)
P-SM 20/30 25 µm	000 2030 P-SM (25µm)		P-SM 20/30 5 µm	000 2030 P-SM (5µm)	P-GS 20/30 25µm	000 2030 P-GS (20µm)
P-SM 30/30 25 µm	000 3030 P-SM (25µm)		P-SM 30/30 5 µm	000 3030 P-SM (5µm)	P-GS 30/30 25µm	000 3030 P-GS (20µm)
P-SM 30/50 25 µm	000 3050 P-SM (25µm)		P-SM 30/50 5 µm	000 3050 P-SM (5µm)	P-GS 30/50 25µm	000 3050 P-GS (20µm)

DONALDSON PROCESS Stainless steel end caps 1.4301 (304)	P-GS (1 µm)	P-GS/VE (20 µm)	P-GS/VE (1 µm)
			
Particle retention	1 µm	20 µm	1 µm
Solids - q. class (ISO 8573-1)	-	-	-
Oils -q. class (ISO 8573-1)	-	-	-
Filter media	sintered inox		
Operating temp. range [°C]	0 to 150	0 to 150	0 to 150
Diff. pressure (new) [mbar]	60	60	60

	P-GS (1 µm)		P-GS/VE (20 µm)		P-GS/VE (1 µm)	
	DONALDSON	OMEGA AIR	DONALDSON	OMEGA AIR	DONALDSON	OMEGA AIR
P-GS 02/05 5 µm		/	P-GS(VE) 02/05 25 µm	/	P-GS(VE) 02/05 5 µm	/
P-GS 03/05 5 µm		/	P-GS(VE) 03/05 25 µm	/	P-GS(VE) 03/05 5 µm	/
P-GS 03/10 5 µm	ODO 0310 P-GS (1µm)		P-GS(VE) 03/10 25 µm	ODO 0310 P-GS(VE) (20µm)	P-GS(VE) 03/10 5 µm	ODO 0310 P-GS(VE) (1µm)
P-GS 04/10 5 µm	ODO 0410 P-GS (1µm)		P-GS(VE) 04/10 25 µm	ODO 0410 P-GS(VE) (20µm)	P-GS(VE) 04/10 5 µm	ODO 0410 P-GS(VE) (1µm)
P-GS 04/20 5 µm	ODO 0420 P-GS (1µm)		P-GS(VE) 04/20 25 µm	ODO 0420 P-GS(VE) (20µm)	P-GS(VE) 04/20 5 µm	ODO 0420 P-GS(VE) (1µm)
P-GS 05/20 5 µm	ODO 0520 P-GS (1µm)		P-GS(VE) 05/20 25 µm	ODO 0520 P-GS(VE) (20µm)	P-GS(VE) 05/20 5 µm	ODO 0520 P-GS(VE) (1µm)
P-GS 05/25 5 µm	ODO 0525 P-GS (1µm)		P-GS(VE) 05/25 25 µm	ODO 0525 P-GS(VE) (20µm)	P-GS(VE) 05/25 5 µm	ODO 0525 P-GS(VE) (1µm)
P-GS 07/25 5 µm	ODO 0725 P-GS (1µm)		P-GS(VE) 07/25 25 µm	ODO 0725 P-GS(VE) (20µm)	P-GS(VE) 07/25 5 µm	ODO 0725 P-GS(VE) (1µm)
P-GS 07/30 5 µm	ODO 0730 P-GS (1µm)		P-GS(VE) 07/30 25 µm	ODO 0730 P-GS(VE) (20µm)	P-GS(VE) 07/30 5 µm	ODO 0730 P-GS(VE) (1µm)
P-GS 10/30 5 µm	ODO 1030 P-GS (1µm)		P-GS(VE) 10/30 25 µm	ODO 1030 P-GS(VE) (20µm)	P-GS(VE) 10/30 5 µm	ODO 1030 P-GS(VE) (1µm)
P-GS 15/30 5 µm	ODO 1530 P-GS (1µm)		P-GS(VE) 15/30 25 µm	ODO 1530 P-GS(VE) (20µm)	P-GS(VE) 15/30 5 µm	ODO 1530 P-GS(VE) (1µm)
P-GS 20/30 5 µm	ODO 2030 P-GS (1µm)		P-GS(VE) 20/30 25 µm	ODO 2030 P-GS(VE) (20µm)	P-GS(VE) 20/30 5 µm	ODO 2030 P-GS(VE) (1µm)
P-GS 30/30 5 µm	ODO 3030 P-GS (1µm)		P-GS(VE) 30/30 25 µm	ODO 3030 P-GS(VE) (20µm)	P-GS(VE) 30/30 5 µm	ODO 3030 P-GS(VE) (1µm)
P-GS 30/50 5 µm	ODO 3050 P-GS (1µm)		P-GS(VE) 30/50 25 µm	ODO 3050 P-GS(VE) (20µm)	P-GS(VE) 30/50 5 µm	ODO 3050 P-GS(VE) (1µm)


OMEGA
AIR

ALTERNATIVE PROCESS FILTER ELEMENTS

DONALDSON

	P-SB	P-PE	P-FF
DONALDSON PROCESS Stainless steel end caps 1.4301 (304)			
Particle retention	25 µm	3 µm	0,1 µm
Solids - q. class (ISO 8573-1)	-	6	2
Oils -q. class (ISO 8573-1)	-	-	2
Filter media	sintered brass	acrylic fibres, cellulose	borosilicate micro fibres
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 120
Diff. pressure (new) [mbar]	20	10	50

	P-SB		P-PE		P-FF	
	DONALDSON	OMEGA AIR	DONALDSON	OMEGA AIR	DONALDSON	OMEGA AIR
	P-SB 02/05	ODO 0205 P-SB	P-PE 02/05	ODO 0205 P-PE/P	P-FF 02/05	ODO 0205 P-FF
	P-SB 03/05	ODO 0305 P-SB	P-PE 03/05	ODO 0305 P-PE/P	P-FF 03/05	ODO 0305 P-FF
	P-SB 03/10	ODO 0310 P-SB	P-PE 03/10	ODO 0310 P-PE/P	P-FF 03/10	ODO 0310 P-FF
	P-SB 04/10	ODO 0410 P-SB	P-PE 04/10	ODO 0410 P-PE/P	P-FF 04/10	ODO 0410 P-FF
	P-SB 04/20	ODO 0420 P-SB	P-PE 04/20	ODO 0420 P-PE/P	P-FF 04/20	ODO 0420 P-FF
	P-SB 05/20	ODO 0520 P-SB	P-PE 05/20	ODO 0520 P-PE/P	P-FF 05/20	ODO 0520 P-FF
	P-SB 05/25	ODO 0525 P-SB	P-PE 05/25	ODO 0525 P-PE/P	P-FF 05/25	ODO 0525 P-FF
	P-SB 07/25	ODO 0725 P-SB	P-PE 07/25	ODO 0725 P-PE/	P-FF 07/25	ODO 0725 P-FF
	P-SB 07/30	ODO 0730 P-SB	P-PE 07/30	ODO 0730 P-PE/P	P-FF 07/30	ODO 0730 P-FF
	P-SB 10/30	ODO 1030 P-SB	P-PE 10/30	ODO 1030 P-PE/P	P-FF 10/30	ODO 1030 P-FF
	P-SB 15/30	ODO 1530 P-SB	P-PE 15/30	ODO 1530 P-PE/P	P-FF 15/30	ODO 1530 P-FF
	P-SB 20/30	ODO 2030 P-SB	P-PE 20/30	ODO 2030 P-PE/P	P-FF 20/30	ODO 2030 P-FF
	P-SB 30/30	ODO 3030 P-SB	P-PE 30/30	ODO 3030 P-PE/P	P-FF 30/30	ODO 3030 P-FF
	P-SB 30/50	ODO 3050 P-SB	P-PE 30/50	ODO 3050 P-PE/P	P-FF 30/50	ODO 3050 P-FF

* Valid if "S" filter cartridge is installed upstream.

DONALDSON PROCESS Stainless steel end caps 1.4301 (304)	P-MF	P-SMF	P-AK
			
Particle retention	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	2	1	1*
Oils -q. class (ISO 8573-1)	2	1	1
Filter media	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 120	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	50	80	60

	P-MF		P-SMF		P-AK	
	DONALDSON	OMEGA AIR	DONALDSON	OMEGA AIR	DONALDSON	OMEGA AIR
	P-MF 02/05	ODO 0205 P-MF	P-SMF 02/05	ODO 0205 P-SMF	P-AK 02/05	ODO 0205 P-AK
	P-MF 03/05	ODO 0305 P-MF	P-SMF 03/05	ODO 0305 P-SMF	P-AK 03/05	ODO 0305 P-AK
	P-MF 03/10	ODO 0310 P-MF	P-SMF 03/10	ODO 0310 P-SMF	P-AK 03/10	ODO 0310 P-AK
	P-MF 04/10	ODO 0410 P-MF	P-SMF 04/10	ODO 0410 P-SMF	P-AK 04/10	ODO 0410 P-AK
	P-MF 04/20	ODO 0420 P-MF	P-SMF 04/20	ODO 0420 P-SMF	P-AK 04/20	ODO 0420 P-AK
	P-MF 05/20	ODO 0520 P-MF	P-SMF 05/20	ODO 0520 P-SMF	P-AK 05/20	ODO 0520 P-AK
	P-MF 05/25	ODO 0525 P-MF	P-SMF 05/25	ODO 0525 P-SMF	P-AK 05/25	ODO 0525 P-AK
	P-MF 07/25	ODO 0725 P-MF	P-SMF 07/25	ODO 0725 P-SMF	P-AK 07/25	ODO 0725 P-AK
	P-MF 07/30	ODO 0730 P-MF	P-SMF 07/30	ODO 0730 P-SMF	P-AK 07/30	ODO 0730 P-AK
	P-MF 10/30	ODO 1030 P-MF	P-SMF 10/30	ODO 1030 P-SMF	P-AK 10/30	ODO 1030 P-AK
	P-MF 15/30	ODO 1530 P-MF	P-SMF 15/30	ODO 1530 P-SMF	P-AK 15/30	ODO 1530 P-AK
	P-MF 20/30	ODO 2030 P-MF	P-SMF 20/30	ODO 2030 P-SMF	P-AK 20/30	ODO 2030 P-AK
	P-MF 30/30	ODO 3030 P-MF	P-SMF 30/30	ODO 3030 P-SMF	P-AK 30/30	ODO 3030 P-AK
	P-MF 30/50	ODO 3050 P-MF	P-SMF 30/50	ODO 3050 P-SMF	P-AK 30/50	ODO 3050 P-AK


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

EKOMAK

	P	U	H	S	C
EKOMAK Plastic end caps					
Particle retention	3 µm	1 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	3	2	1	1*
Oils -q. class (ISO 8573-1)	-	-	2	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres			activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	20	50	80	60

	P		U		H		S		C	
	EKOMAK	OMEGA AIR	EKOMAK	OMEGA AIR	EKOMAK	OMEGA AIR	EKOMAK	OMEGA AIR	EKOMAK	OMEGA AIR
	EP10	OEK 10 P/P	EU10	OEK 10 U/R	EH10	OEK 10 H/M	ES10	OEK 10 S/S	EC10	OEK 10 C/A
	EP15	OEK 15 P/P	EU15	OEK 15 U/R	EH15	OEK 15 H/M	ES15	OEK 15 S/S	EC15	OEK 15 C/A
	EP20	OEK 20 P/P	EU20	OEK 20 U/R	EH20	OEK 20 H/M	ES20	OEK 20 S/S	EC20	OEK 20 C/A
	EP30	OEK 30 P/P	EU30	OEK 30 U/R	EH30	OEK 30 H/M	ES30	OEK 30 S/S	EC30	OEK 30 C/A
	EP55	OEK 55 P/P	EU55	OEK 55 U/R	EH55	OEK 55 H/M	ES55	OEK 55 S/S	EC55	OEK 55 C/A
	EP95	OEK 95 P/P	EU95	OEK 95 U/R	EH95	OEK 95 H/M	ES95	OEK 95 S/S	EC95	OEK 95 C/A
	EP150	OEK 150 P/P	EU150	OEK 150 U/R	EH150	OEK 150 H/M	ES150	OEK 150 S/S	EC150	OEK 150 C/A
	EP220	OEK 220 P/P	EU220	OEK 220 U/R	EH220	OEK 220 H/M	ES220	OEK 220 S/S	EC220	OEK 220 C/A
	EP290	OEK 290 P/P	EU290	OEK 290 U/R	EH290	OEK 290 H/M	ES290	OEK 290 S/S	EC290	OEK 290 C/A
	EP430	OEK 430 P/P	EU430	OEK 430 U/R	EH430	OEK 430 H/M	ES430	OEK 430 S/S	EC430	OEK 430 C/A
	EP625	OEK 625 P/P	EU625	OEK 625 U/R	EH625	OEK 625 H/M	ES625	OEK 620 S/S	EC625	OEK 620 C/A
	EP775	OEK 775 P/P	EU775	OEK 775 U/R	EH775	OEK 775 H/M	ES775	OEK 775 S/S	EC775	OEK 775 C/A

* Valid if "S" filter cartridge is installed upstream.


**OMEGA
AIR**

ALTERNATIVE FILTER ELEMENTS

EKOMAK

	P	U	H	S	C
EKOMAK Aluminium end caps					
Particle retention	3 µm	1 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	3	2	1	1*
Oils -q. class (ISO 8573-1)	-	-	2	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres			activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	20	50	80	60

	P		U		H		S		C	
	EKOMAK	OMEGA AIR	EKOMAK	OMEGA AIR	EKOMAK	OMEGA AIR	EKOMAK	OMEGA AIR	EKOMAK	OMEGA AIR
	EP10	OEK 10 P/P AL	EU10	OEK 10 U/R AL	EH10	OEK 10 H/M AL	ES10	OEK 10 S/S AL	EC10	OEK 10 C/A AL
	EP15	OEK 15 P/P AL	EU15	OEK 15 U/R AL	EH15	OEK 15 H/M AL	ES15	OEK 15 S/S AL	EC15	OEK 15 C/A AL
	EP20	OEK 20 P/P AL	EU20	OEK 20 U/R AL	EH20	OEK 20 H/M AL	ES20	OEK 20 S/S AL	EC20	OEK 20 C/A AL
	EP30	OEK 30 P/P AL	EU30	OEK 30 U/R AL	EH30	OEK 30 H/M AL	ES30	OEK 30 S/S AL	EC30	OEK 30 C/A AL
	EP55	OEK 55 P/P AL	EU55	OEK 55 U/R AL	EH55	OEK 55 H/M AL	ES55	OEK 55 S/S AL	EC55	OEK 55 C/A AL
	EP95	OEK 95 P/P AL	EU95	OEK 95 U/R AL	EH95	OEK 95 H/M AL	ES95	OEK 95 S/S AL	EC95	OEK 95 C/A AL
	EP150	OEK 150 P/P AL	EU150	OEK 150 U/R AL	EH150	OEK 150 H/M AL	ES150	OEK 150 S/S AL	EC150	OEK 150 C/A AL
	EP220	OEK 220 P/P AL	EU220	OEK 220 U/R AL	EH220	OEK 220 H/M AL	ES220	OEK 220 S/S AL	EC220	OEK 220 C/A AL
	EP290	OEK 290 P/P AL	EU290	OEK 290 U/R AL	EH290	OEK 290 H/M AL	ES290	OEK 290 S/S AL	EC290	OEK 290 C/A AL
	EP430	OEK 430 P/P AL	EU430	OEK 430 U/R AL	EH430	OEK 430 H/M AL	ES430	OEK 430 S/S AL	EC430	OEK 430 C/A AL
	EP625	OEK 625 P/P AL	EU625	OEK 625 U/R AL	EH625	OEK 625 H/M AL	ES625	OEK 620 S/S AL	EC625	OEK 620 C/A AL
	EP775	OEK 775 P/P AL	EU775	OEK 775 U/R AL	EH775	OEK 775 H/M AL	ES775	OEK 775 S/S AL	EC775	OEK 775 C/A AL

* Valid if "S" filter cartridge is installed upstream.


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

FIAC

	Q	P	D	C
FIAC Plastic end caps				
Particle retention	3 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	2	1	1*
Oils -q. class (ISO 8573-1)	-	2	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	50	80	60

	Q		P		D		C	
	FIAC	OMEGA AIR	FIAC	OMEGA AIR	FIAC	OMEGA AIR	FIAC	OMEGA AIR
	FQ 1000	OFC 1000 Q/P	FP 1000	OFC 1000 P/M	FD 1000	OFC 1000 D/S	FC 1000	OFC 1000 C/A
	FQ 1300	OFC 1300 Q/P	FP 1300	OFC 1300 P/M	FD 1300	OFC 1300 D/S	FC 1300	OFC 1300 C/A
	FQ 2000	OFC 2000 Q/P	FP 2000	OFC 2000 P/M	FD 2000	OFC 2000 D/S	FC 2000	OFC 2000 C/A
	FQ 3300	OFC 3300 Q/P	FP 3300	OFC 3300 P/M	FD 3300	OFC 3300 D/S	FC 3300	OFC 3300 C/A
	FQ 5600	OFC 5600 Q/P	FP 5600	OFC 5600 P/M	FD 5600	OFC 5600 D/S	FC 5600	OFC 5600 C/A
	FQ 8600	OFC 8500 Q/P	FP 8600	OFC 8500 P/M	FD 8600	OFC 8500 D/S	FC 8600	OFC 8500 C/A
	FQ 13000	OFC 13000 Q/P	FP 13000	OFC 13000 P/M	FD 13000	OFC 13000 D/S	FC 13000	OFC 13000 C/A
	FQ 16500	OFC 16500 Q/P	FP 16500	OFC 16500 P/M	FD 16500	OFC 16500 D/S	FC 16500	OFC 16500 C/A
	FQ 25000	OFC 25000 Q/P	FP 25000	OFC 25000 P/M	FD 25000	OFC 25000 D/S	FC 25000	OFC 25000 C/A

* Valid if "S" filter cartridge is installed upstream.



ALTERNATIVE FILTER ELEMENTS

FINITE J

	3P	10C	7C	4C	A
FINITE Aluminium end caps					
Particle retention	3 µm	1 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	3	2	1	1*
Oils - q. class (ISO 8573-1)	-	-	2	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres			activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	20	50	80	60

	3P		10C		7C		4C		A	
	FINITE	OMEGA AIR	FINITE	OMEGA AIR	FINITE	OMEGA AIR	FINITE	OMEGA AIR	FINITE	OMEGA AIR
	3PJAK	OFI JAK 3P/P AL	10CJAK	OFI JAK 10C/R AL	7CPJAK	OFI JAK 7CP/M AL	4CJAK	OFI JAK 4C/S AL	AJAK	OFI JAK A/A AL
	3PJBK	OFI JBK 3P/P AL	10CJBK	OFI JBK 10C/R AL	7CPJBK	OFI JBK 7CP/M AL	4CJBK	OFI JBK 4C/S AL	AJBK	OFI JBK A/A AL
	3PJCK	OFI JCK 3P/P AL	10CJCK	OFI JCK 10C/R AL	7CPJCK	OFI JCK 7CP/M AL	4CJCK	OFI JCK 4C/S AL	AJCK	OFI JCK A/A AL
	3PJDK	OFI JDK 3P/P AL	10CJDK	OFI JDK 10C/R AL	7CPJDK	OFI JDK 7CP/M AL	4CJDK	OFI JDK 4C/S AL	AJDK	OFI JDK A/A AL
	3PJEK	OFI JEK 3P/P AL	10CJEK	OFI JEK 10C/R AL	7CPJEK	OFI JEK 7CP/M AL	4CJEK	OFI JEK 4C/S AL	AJEK	OFI JEK A/A AL

* Valid if "S" filter cartridge is installed upstream.


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

FINITE (old)

FINITE Aluminium end caps	3P	10C	7C
Particle retention	3 µm	1 µm	0,1 µm
Solids - q. class (ISO 8573-1)	6	3	2
Oils -q. class (ISO 8573-1)	-	-	2
Filter media	acrylic fibres, cellulose	borosilicate micro fibres	
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65
Diff. pressure (new) [mbar]	10	20	50

	3P		10C		7C	
	FINITE	OMEGA AIR	FINITE	OMEGA AIR	FINITE	OMEGA AIR
	3PWC11-035	OFI 11-035 3PWC/P AL	10CWC11-035	OFI 11-035 10CWC/R AL	7CPWC11-035	OFI 11-035 7CPWC/M AL
	3PWC15-070	OFI 15-070 3PWC/P AL	10CWC15-070	OFI 15-070 10CWC/R AL	7CPWC15-070	OFI 15-070 7CPWC/M AL
	3PWC23-130	OFI 23-130 3PWC/P AL	10CWC23-130	OFI 23-130 10CWC/R AL	7CPWC23-130	OFI 23-130 7CPWC/M AL

* Valid if "S" filter cartridge is installed upstream.

4C	A
	
0,01 µm	activated carbon
1	1*
1	1
	activated carbon
1,5 to 65	1,5 to 45
80	60

4C		A	
FINITE	OMEGA AIR	FINITE	OMEGA AIR
4CWC11-035	OFI 11-035 4CWC/S AL	AWC11-035	OFI 11-035 AWC/A AL
4CWC15-070	OFI 15-070 4CWC/S AL	AWC15-070	OFI 15-070 AWC/A AL
4CWC23-130	OFI 23-130 4CWC/S AL	AWC23-130	OFI 23-130 AWC/A AL


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

FUSHENG (new)

FUSHENG (new) Plastic end caps	U	H	C
			
Particle retention	1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	3	1	1*
Oils -q. class (ISO 8573-1)	-	1	1
Filter media	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	20	80	60

	U		H		C	
	FUSHENG	OMEGA AIR	FUSHENG	OMEGA AIR	FUSHENG	OMEGA AIR
	FF005 U	OFS FF 005 U/R	FF005 H	OFS FF 005 H/S	FF005 C	OFS FF 005 C/A
	FF010 U	OFS FF 010 U/R	FF010 H	OFS FF 010 H/S	FF010 C	OFS FF 010 C/A
	FF015 U	OFS FF 015 U/R	FF015 H	OFS FF 015 H/S	FF015 C	OFS FF 015 C/A
	FF030 U	OFS FF 030 U/R	FF030 H	OFS FF 030 H/S	FF030 C	OFS FF 030 C/A
	FF050 U	OFS FF 050 U/R	FF050 H	OFS FF 050 H/S	FF050 C	OFS FF 050 C/A
	FF075 U	OFS FF 075 U/R	FF075 H	OFS FF 075 H/S	FF075 C	OFS FF 075 C/A
	FF125 U	OFS FF 125 U/R	FF125 H	OFS FF 125 H/S	FF125 C	OFS FF 125 C/A
	FF175 U	OFS FF 175 U/R	FF175 H	OFS FF 175 H/S	FF175 C	OFS FF 175 C/A
	FF250 U FF300 U	OFS FF 250 U/R	FF250 H FF300 H	OFS FF 250 H/S	FF250 C FF300 C	OFS FF 250 C/A
	FF500 U	OFS FF 500 U/R	FF500 H	OFS FF 500 H/S	FF500 C	OFS FF 500 C/A

* Valid if "S" filter cartridge is installed upstream.


**OMEGA
AIR**

ALTERNATIVE FILTER ELEMENTS

FUSHENG (old)

	P	U	H	C
FUSHENG (old) Plastic end caps				
Particle retention	3 µm	1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	3	1	1*
Oils -q. class (ISO 8573-1)	-	-	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	20	80	60

	P		U		H		C	
	FUSHENG	OMEGA AIR	FUSHENG	OMEGA AIR	FUSHENG	OMEGA AIR	FUSHENG	OMEGA AIR
FFA05 P		OFS FFA 05 P/P	FFA05 U	OFS FFA 05 U/R	FFA05 H	OFS FFA 05 H/S	FFA05 C	OFS FFA 05 C/A
FFA08 P		OFS FFA 08 P/P	FFA08 U	OFS FFA 08 U/R	FFA08 H	OFS FFA 08 H/S	FFA08 C	OFS FFA 08 C/A
FFA10 P		OFS FFA 10 P/P	FFA10 U	OFS FFA 10 U/R	FFA10 H	OFS FFA 10 H/S	FFA10 C	OFS FFA 10 C/A
FFA15 P		OFS FFA 15 P/P	FFA15 U	OFS FFA 15 U/R	FFA15 H	OFS FFA 15 H/S	FFA15 C	OFS FFA 15 C/A
FFA20 P		OFS FFA 20 P/P	FFA20 U	OFS FFA 20 U/R	FFA20 H	OFS FFA 20 H/S	FFA20 C	OFS FFA 20 C/A
FFA40 P		OFS FFA 40 P/P	FFA40 U	OFS FFA 40 U/R	FFA40 H	OFS FFA 40 H/S	FFA40 C	OFS FFA 40 C/A
FFA60 P		OFS FFA 60 P/P	FFA60 U	OFS FFA 60 U/R	FFA60 H	OFS FFA 60 H/S	FFA60 C	OFS FFA 60 C/A
FFA75 P		OFS FFA 75 P/P	FFA75 U	OFS FFA 75 U/R	FFA75 H	OFS FFA 75 H/S	FFA75 C	OFS FFA 75 C/A
FFA125 P		OFS FFA 125 P/P	FFA125 U	OFS FFA 125 U/R	FFA125 H	OFS FFA 125 H/S	FFA125 C	OFS FFA 125 C/A
FFA175 P		OFS FFA 175 P/P	FFA175 U	OFS FFA 175 U/R	FFA175 H	OFS FFA 175 H/S	FFA175 C	OFS FFA 175 C/A
FFA250 P		OFS FFA 250 P/P	FFA250 U	OFS FFA 250 U/R	FFA250 H	OFS FFA 250 H/S	FFA250 C	OFS FFA 250 C/A
FFA300 P		OFS FFA 300 P/P	FFA300 U	OFS FFA 300 U/R	FFA300 H	OFS FFA 300 H/S	FFA300 C	OFS FFA 300 C/A

* Valid if "S" filter cartridge is installed upstream.


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

FUSHENG (old)

	P	U	H	C
FUSHENG (old) Aluminium end caps				
Particle retention	3 µm	1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	3	1	1*
Oils -q. class (ISO 8573-1)	-	-	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	20	80	60

	P		U		H		C	
	FUSHENG	OMEGA AIR	FUSHENG	OMEGA AIR	FUSHENG	OMEGA AIR	FUSHENG	OMEGA AIR
FFA05 P		OFS 05 P/P AL	FFA05 U	OFS 05 U/R AL	FFA05 H	OFS 05 H/S AL	FFA05 C	OFS 05 C/A AL
FFA08 P		OFS 08 P/P AL	FFA08 U	OFS 08 U/R AL	FFA08 H	OFS 08 H/S AL	FFA08 C	OFS 08 C/A AL
FFA10 P		OFS 10 P/P AL	FFA10 U	OFS 10 U/R AL	FFA10 H	OFS 10 H/S AL	FFA10 C	OFS 10 C/A AL
FFA15 P		OFS 15 P/P AL	FFA15 U	OFS 15 U/R AL	FFA15 H	OFS 15 H/S AL	FFA15 C	OFS 15 C/A AL
FFA20 P		OFS 20 P/P AL	FFA20 U	OFS 20 U/R AL	FFA20 H	OFS 20 H/S AL	FFA20 C	OFS 20 C/A AL
FFA40 P		OFS 40 P/P AL	FFA40 U	OFS 40 U/R AL	FFA40 H	OFS 40 H/S AL	FFA40 C	OFS 40 C/A AL
FFA60 P		OFS 60 P/P AL	FFA60 U	OFS 60 U/R AL	FFA60 H	OFS 60 H/S AL	FFA60 C	OFS 60 C/A AL
FFA75 P		OFS 75 P/P AL	FFA75 U	OFS 75 U/R AL	FFA75 H	OFS 75 H/S AL	FFA75 C	OFS 75 C/A AL
FFA125 P		OFS 125 P/P AL	FFA125 U	OFS 125 U/R AL	FFA125 H	OFS 125 H/S AL	FFA125 C	OFS 125 C/A AL
FFA175 P		OFS 175 P/P AL	FFA175 U	OFS 175 U/R AL	FFA175 H	OFS 175 H/S AL	FFA175 C	OFS 175 C/A AL
FFA250 P		OFS 250 P/P AL	FFA250 U	OFS 250 U/R AL	FFA250 H	OFS 250 H/S AL	FFA250 C	OFS 250 C/A AL
FFA300 P		OFS 300 P/P AL	FFA300 U	OFS 300 U/R AL	FFA300 H	OFS 300 H/S AL	FFA300 C	OFS 300 C/A AL

* Valid if "S" filter cartridge is installed upstream.



HANKISON NGF

	SF	PF	HF	CF
HANKISON NGF Plastic end caps				
Particle retention	3 µm	1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	3	1	1*
Oils -q. class (ISO 8573-1)	-	-	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	20	80	60

	SF		PF		HF		CF	
	HANKISON	OMEGA AIR	HANKISON	OMEGA AIR	HANKISON	OMEGA AIR	HANKISON	OMEGA AIR
02-SF		OHK NGF 02 SF/P	02-PF	OHK NGF 02 PF/R	02-HF	OHK NGF 02 HF/S	02-CF	OHK NGF 02 CF/A
03-SF		OHK NGF 03 SF/P	03-PF	OHK NGF 03 PF/R	03-HF	OHK NGF 03 HF/S	03-CF	OHK NGF 03 CF/A
04-SF		OHK NGF 04 SF/P	04-PF	OHK NGF 04 PF/R	04-HF	OHK NGF 04 HF/S	04-CF	OHK NGF 04 CF/A
06-SF		OHK NGF 06 SF/P	06-PF	OHK NGF 06 PF/R	06-HF	OHK NGF 06 HF/S	06-CF	OHK NGF 06 CF/A
07-SF		OHK NGF 07 SF/P	07-PF	OHK NGF 07 PF/R	07-HF	OHK NGF 07 HF/S	07-CF	OHK NGF 07 CF/A
08-SF		OHK NGF 08 SF/P	08-PF	OHK NGF 08 PF/R	08-HF	OHK NGF 08 HF/S	08-CF	OHK NGF 08 CF/A
10-SF		OHK NGF 10 SF/P	10-PF	OHK NGF 10 PF/R	10-HF	OHK NGF 10 HF/S	10-CF	OHK NGF 10 CF/A
11-SF		OHK NGF 11 SF/P	11-PF	OHK NGF 11 PF/R	11-HF	OHK NGF 11 HF/S	11-CF	OHK NGF 11 CF/A
12-SF		OHK NGF 12 SF/P	12-PF	OHK NGF 12 PF/R	12-HF	OHK NGF 12 HF/S	12-CF	OHK NGF 12 CF/A
13-SF		OHK NGF 13 SF/P	13-PF	OHK NGF 13 PF/R	13-HF	OHK NGF 13 HF/S	13-CF	OHK NGF 13 CF/A
14-SF		OHK NGF 14 SF/P	14-PF	OHK NGF 14 PF/R	14-HF	OHK NGF 14 HF/S	14-CF	OHK NGF 14 CF/A
15-SF		OHK NGF 15 SF/P	15-PF	OHK NGF 15 PF/R	15-HF	OHK NGF 15 HF/S	15-CF	OHK NGF 15 CF/A
16-SF		OHK NGF 16 SF/P	16-PF	OHK NGF 16 PF/R	16-HF	OHK NGF 16 HF/S	16-CF	OHK NGF 16 CF/A
17-SF		OHK NGF 17 SF/P	17-PF	OHK NGF 17 PF/R	17-HF	OHK NGF 17 HF/S	17-CF	OHK NGF 17 CF/A

* Valid if "S" filter cartridge is installed upstream.


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

HANKISON

	E9	E7	E5	E3	E1
HANKISON Plastic end caps					
Particle retention	3 µm	1 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	3	2	1	1*
Oils - q. class (ISO 8573-1)	-	-	2	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres			activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	20	50	80	60

	E9		E7		E5		E3		E1	
	HANKISON	OMEGA AIR	HANKISON	OMEGA AIR	HANKISON	OMEGA AIR	HANKISON	OMEGA AIR	HANKISON	OMEGA AIR
E9-12		OHK 12 E9/P	E7-12	OHK 12 E7/R	E5-12	OHK 12 E5/M	E3-12	OHK 12 E3/S	E1-12	OHK 12 E1/A
E9-16		OHK 16 E9/P	E7-16	OHK 16 E7/R	E5-16	OHK 16 E5/M	E3-16	OHK 16 E3/S	E1-16	OHK 16 E1/A
E9-20		OHK 20 E9/P	E7-20	OHK 20 E7/R	E5-20	OHK 20 E5/M	E3-20	OHK 20 E3/S	E1-20	OHK 20 E1/A
E9-24		OHK 24 E9/P	E7-24	OHK 24 E7/R	E5-24	OHK 24 E5/M	E3-24	OHK 24 E3/S	E1-24	OHK 24 E1/A
E9-28		OHK 28 E9/P	E7-28	OHK 28 E7/R	E5-28	OHK 28 E5/M	E3-28	OHK 28 E3/S	E1-28	OHK 28 E1/A
E9-32		OHK 32 E9/P	E7-32	OHK 32 E7/R	E5-32	OHK 32 E5/M	E3-32	OHK 32 E3/S	E1-32	OHK 32 E1/A
E9-36		OHK 36 E9/P	E7-36	OHK 36 E7/R	E5-36	OHK 36 E5/M	E3-36	OHK 36 E3/S	E1-36	OHK 36 E1/A
E9-40		OHK 40 E9/P	E7-40	OHK 40 E7/R	E5-40	OHK 40 E5/M	E3-40	OHK 40 E3/S	E1-40	OHK 40 E1/A
E9-44		OHK 44 E9/P	E7-44	OHK 44 E7/R	E5-44	OHK 44 E5/M	E3-44	OHK 44 E3/S	E1-44	OHK 44 E1/A
E9-48		OHK 48 E9/P	E7-48	OHK 48 E7/R	E5-48	OHK 48 E5/M	E3-48	OHK 48 E3/S	E1-48	OHK 48 E1/A
E9-52		OHK 52 E9/P	E7-52	OHK 52 E7/R	E5-52	OHK 52 E5/M	E3-52	OHK 52 E3/S	E1-52	OHK 52 E1/A
E9-54		OHK 54 E9/P	E7-54	OHK 54 E7/R	E5-54	OHK 54 E5/M	E3-54	OHK 54 E3/S	E1-54	OHK 54 E1/A

* Valid if "S" filter cartridge is installed upstream.



HANKISON

	E9	E7	E5	E3	E1
HANKISON Aluminium end caps					
Particle retention	3 µm	1 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	3	2	1	1*
Oils -q. class (ISO 8573-1)	-	-	2	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres			activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	20	50	80	60

	E9		E7		E5		E3		E1	
	HANKISON	OMEGA AIR	HANKISON	OMEGA AIR	HANKISON	OMEGA AIR	HANKISON	OMEGA AIR	HANKISON	OMEGA AIR
E9-12		OHK 12 E9/P AL	E7-12	OHK 12 E7/R AL	E5-12	OHK 12 E5/M AL	E3-12	OHK 12 E3/S AL	E1-12	OHK 12 E1/A AL
E9-16		OHK 16 E9/P AL	E7-16	OHK 16 E7/R AL	E5-16	OHK 16 E5/M AL	E3-16	OHK 16 E3/S AL	E1-16	OHK 16 E1/A AL
E9-20		OHK 20 E9/P AL	E7-20	OHK 20 E7/R AL	E5-20	OHK 20 E5/M AL	E3-20	OHK 20 E3/S AL	E1-20	OHK 20 E1/A AL
E9-24		OHK 24 E9/P AL	E7-24	OHK 24 E7/R AL	E5-24	OHK 24 E5/M AL	E3-24	OHK 24 E3/S AL	E1-24	OHK 24 E1/A AL
E9-28		OHK 28 E9/P AL	E7-28	OHK 28 E7/R AL	E5-28	OHK 28 E5/M AL	E3-28	OHK 28 E3/S AL	E1-28	OHK 28 E1/A AL
E9-32		OHK 32 E9/P AL	E7-32	OHK 32 E7/R AL	E5-32	OHK 32 E5/M AL	E3-32	OHK 32 E3/S AL	E1-32	OHK 32 E1/A AL
E9-36		OHK 36 E9/P AL	E7-36	OHK 36 E7/R AL	E5-36	OHK 36 E5/M AL	E3-36	OHK 36 E3/S AL	E1-36	OHK 36 E1/A AL
E9-40		OHK 40 E9/P AL	E7-40	OHK 40 E7/R AL	E5-40	OHK 40 E5/M AL	E3-40	OHK 40 E3/S AL	E1-40	OHK 40 E1/A AL
E9-44		OHK 44 E9/P AL	E7-44	OHK 44 E7/R AL	E5-44	OHK 44 E5/M AL	E3-44	OHK 44 E3/S AL	E1-44	OHK 44 E1/A AL
E9-48		OHK 48 E9/P AL	E7-48	OHK 48 E7/R AL	E5-48	OHK 48 E5/M AL	E3-48	OHK 48 E3/S AL	E1-48	OHK 48 E1/A AL
E9-52		OHK 52 E9/P AL	E7-52	OHK 52 E7/R AL	E5-52	OHK 52 E5/M AL	E3-52	OHK 52 E3/S AL	E1-52	OHK 52 E1/A AL
E9-54		OHK 54 E9/P AL	E7-54	OHK 54 E7/R AL	E5-54	OHK 54 E5/M AL	E3-54	OHK 54 E3/S AL	E1-54	OHK 54 E1/A AL

* Valid if "S" filter cartridge is installed upstream.

OMEGA AIR

Air and Gas



HIROSS (new)

	Q	P	S	C
HIROSS Plastic end caps				
Particle retention	3 µm	0,1 µm	0,01 µm	activated carbon
Solids -class (ISO 8573-1)	6	2	1	1*
Oils - class (ISO 8573-1)	-	2	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. press. (new) [mbar]	10	50	80	60

	Q			P			S			C		
	HIROSS		OMEGA AIR	HIROSS		OMEGA AIR	HIROSS		OMEGA AIR	HIROSS		OMEGA AIR
	old	new		old	new		old	new		old	new	
	/	005 Q	OHI 005 Q/P	/	005 P	OHI 005 P/M	/	005 S	OHI 005 S/S	/	005 C	OHI 005 C/A
004 Q 006 Q	010 Q	OHI 010 Q/P	004 P 006 P	010 P	OHI 010 P/M	004 S 006 S	010 S	OHI 010 S/S	004 C 006 C	010 C	OHI 010 C/A	
007 Q 009 Q	016 Q	OHI 016 Q/P	007 P 009 P	016 P	OHI 016 P/M	007 S 009 S	016 S	OHI 016 S/S	007 C 009 C	016 C	OHI 016 C/A	
015 Q 020 Q	022 Q	OHI 022 Q/P	015 P 020 P	022 P	OHI 022 P/M	015 S 020 S	022 S	OHI 022 S/S	015 C 020 C	022 C	OHI 022 C/A	
024 Q	030 Q	OHI 030 Q/P	024 P	030 P	OHI 030 P/M	024 S	030 S	OHI 030 S/S	024 C	030 C	OHI 030 C/A	
035 Q	045 Q	OHI 045 Q/P	035 P	045 P	OHI 045 P/M	035 S	045 S	OHI 045 S/S	035 C	045 C	OHI 045 C/A	
060 Q	072 Q	OHI 072 Q/P	060 P	072 P	OHI 072 P/M	060 S	072 S	OHI 072 S/S	060 C	072 C	OHI 072 C/A	
/	135 Q	OHI 135 Q/P	/	135 P	OHI 135 P/M	/	135 S	OHI 135 S/S	/	135 C	OHI 135 C/A	
/	175 Q	OHI 175 Q/P	/	175 P	OHI 175 P/M	/	175 S	OHI 175 S/S	/	175 C	OHI 175 C/A	
120 Q 151 Q	205 Q	OHI 205 Q/P	120 P 151 P	205 P	OHI 205 P/M	120 S 151 S	205 S	OHI 205 S/S	120 C 151 C	205 C	OHI 205 C/A	
/	250 Q	OHI 250 Q/P	/	250 P	OHI 250 P/M	/	250 S	OHI 250 S/S	/	250 C	OHI 250 C/A	
/	300 Q	OHI 300 Q/P	/	300 P	OHI 300 P/M	/	300 S	OHI 300 S/S	/	300 C	OHI 300 C/A	
/	370 Q	OHI 370 Q/P	/	370 P	OHI 370 P/M	/	370 S	OHI 370 S/S	/	370 C	OHI 370 C/A	

* Valid if "S" filter cartridge is installed upstream.


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

HIROSS (new)

	Q	P	S	C
HIROSS Aluminium end caps				
Particle retention	3 µm	0,1 µm	0,01 µm	activated carbon
Solids -class (ISO 8573-1)	6	2	1	1*
Oils - class (ISO 8573-1)	-	2	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. press. (new) [mbar]	10	50	80	60

	Q			P			S			C		
	HIROSS		OMEGA AIR	HIROSS		OMEGA AIR	HIROSS		OMEGA AIR	HIROSS		OMEGA AIR
	old	new		old	new		old	new		old	new	
/	005 Q	OHI 005 Q/P AL	/	005 P	OHI 005 P/M AL	/	005 S	OHI 005 S/S AL	/	005 C	OHI 005 C/A AL	
004 Q 006 Q	010 Q	OHI 010 Q/P AL	004 P 006 P	010 P	OHI 010 P/M AL	004 S 006 S	010 S	OHI 010 S/S AL	004 C 006 C	010 C	OHI 010 C/A AL	
007 Q 009 Q	016 Q	OHI 016 Q/P AL	007 P 009 P	016 P	OHI 016 P/M AL	007 S 009 S	016 S	OHI 016 S/S AL	007 C 009 C	016 C	OHI 016 C/A AL	
015 Q 020 Q	022 Q	OHI 022 Q/P AL	015 P 020 P	022 P	OHI 022 P/M AL	015 S 020 S	022 S	OHI 022 S/S AL	015 C 020 C	022 C	OHI 022 C/A AL	
024 Q	030 Q	OHI 030 Q/P AL	024 P	030 P	OHI 030 P/M AL	024 S	030 S	OHI 030 S/S AL	024 C	030 C	OHI 030 C/A AL	
035 Q	045 Q	OHI 045 Q/P AL	035 P	045 P	OHI 045 P/M AL	035 S	045 S	OHI 045 S/S AL	035 C	045 C	OHI 045 C/A AL	
060 Q	072 Q	OHI 072 Q/P AL	060 P	072 P	OHI 072 P/M AL	060 S	072 S	OHI 072 S/S AL	060 C	072 C	OHI 072 C/A AL	
/	135 Q	OHI 135 Q/P AL	/	135 P	OHI 135 P/M AL	/	135 S	OHI 135 S/S AL	/	135 C	OHI 135 C/A AL	
/	175 Q	OHI 175 Q/P AL	/	175 P	OHI 175 P/M AL	/	175 S	OHI 175 S/S AL	/	175 C	OHI 175 C/A AL	
120 Q 151 Q	205 Q	OHI 205 Q/P AL	120 P, 151 P	205 P	OHI 205 P/M AL	120 S 151 S	205 S	OHI 205 S/S AL	120 C 151 C	205 C	OHI 205 C/A AL	
/	250 Q	OHI 250 Q/P AL	/	250 P	OHI 250 P/M AL	/	250 S	OHI 250 S/S AL	/	250 C	OHI 250 C/A AL	
/	300 Q	OHI 300 Q/P AL	/	300 P	OHI 300 P/M AL	/	300 S	OHI 300 S/S AL	/	300 C	OHI 300 C/A AL	
/	370 Q	OHI 370 Q/P AL	/	370 P	OHI 370 P/M AL	/	370 S	OHI 370 S/S AL	/	370 C	OHI 370 C/A AL	

* Valid if "S" filter cartridge is installed upstream.


**OMEGA
AIR**

ALTERNATIVE FILTER ELEMENTS

HIROSS (old)

	Q	P	S	C
HIROSS Plastic end caps				
Particle retention	3 µm	0,1 µm	0,01 µm	activated carbon
Solids -class (ISO 8573-1)	6	2	1	1*
Oils - class (ISO 8573-1)	-	2	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. press. (new) [mbar]	10	50	80	60

	Q			P			S			C		
	HIROSS		OMEGA AIR	HIROSS		OMEGA AIR	HIROSS		OMEGA AIR	HIROSS		OMEGA AIR
	old	new		old	new		old	new		old	new	
	004 Q	010 Q	OHI 004 Q/P	004 P	010 P	OHI 004 P/M	004 S	010 S	OHI 004 S/S	004 C	010 C	OHI 004 C/A
	006 Q			006 P			006 S			006 C		
	007 Q	016 Q	OHI 007 Q/P	007 P	016 P	OHI 007 P/M	007 S	016 S	OHI 007 S/S	007 C	016 C	OHI 007 C/A
	009 Q			009 P			009 S			009 C		
	015 Q	022 Q	OHI 015 Q/P	015 P	022 P	OHI 015 P/M	015 S	022 S	OHI 015 S/S	015 C	022 C	OHI 015 C/A
	020 Q			020 P			020 S			020 C		
	024 Q	030 Q	OHI 024 Q/P	024 P	030 P	OHI 024 P/M	024 S	030 S	OHI 024 S/S	024 C	030 C	OHI 024 C/A
	035 Q	045 Q	OHI 035 Q/P	035 P	045 P	OHI 035 P/M	035 S	045 S	OHI 035 S/S	035 C	045 C	OHI 035 C/A
	060 Q	072 Q	OHI 060 Q/P	060 P	072 P	OHI 060 P/M	060 S	072 S	OHI 060 S/S	060 C	072 C	OHI 060 C/A
	090 Q			090 P			090 S			090 C		
	110 Q	/	OHI 090 Q/P	110 P	/	OHI 090 P/M	110 S	/	OHI 090 S/S	110 C	/	OHI 090 C/A
	120 Q	205 Q	OHI 120 Q/P	120 P	205 P	OHI 120 P/M	120 S	205 S	OHI 120 S/S	120 C	205 C	OHI 120 C/A
	151 Q			151 P			151 S			151 C		
	150 Q	/	OHI 150 Q/P	150 P	/	OHI 150 P/M	150 S	/	OHI 150 S/S	150 C	/	OHI 150 C/A
	180 Q			180 P			180 S			180 C		
	200 Q	260 Q	OHI 200 Q/P	200 P	260 P	OHI 200 P/M	200 S	260 S	OHI 200 S/S	200 C	260 C	OHI 200 C/A
	240 Q	/	OHI 240 Q/P	240 P	/	OHI 240 P/M	240 S	/	OHI 240 S/S	240 C	/	OHI 240 C/A
	280 Q			280 P			280 S			280 C		

* Valid if "S" filter cartridge is installed upstream.


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

HIROSS (old)

	Q	P	S	C
HIROSS Aluminium end caps				
Particle retention	3 µm	0,1 µm	0,01 µm	activated carbon
Solids - class (ISO 8573-1)	6	2	1	1*
Oils - class (ISO 8573-1)	-	2	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. press. (new) [mbar]	10	50	80	60

	Q			P			S			C		
	HIROSS		OMEGA AIR	HIROSS		OMEGA AIR	HIROSS		OMEGA AIR	HIROSS		OMEGA AIR
	old	new		old	new		old	new		old	new	
	004 Q	010 Q	OHI 004 Q/P AL	004 P	010 P	OHI 004 P/M AL	004 S	010 S	OHI 004 S/S AL	004 C	010 C	OHI 004 C/A AL
	006 Q			006 P			006 S			006 C		
	007 Q	016 Q	OHI 007 Q/P AL	007 P	016 P	OHI 007 P/M AL	007 S	016 S	OHI 007 S/S AL	007 C	016 C	OHI 007 C/A AL
	009 Q			009 P			009 S			009 C		
	015 Q	022 Q	OHI 015 Q/P AL	015 P	022 P	OHI 015 P/M AL	015 S	022 S	OHI 015 S/S AL	015 C	022 C	OHI 015 C/A AL
	020 Q			020 P			020 S			020 C		
	024 Q	030 Q	OHI 024 Q/P AL	024 P	030 P	OHI 024 P/M AL	024 S	030 S	OHI 024 S/S AL	024 C	030 C	OHI 024 C/A AL
	035 Q	045 Q	OHI 035 Q/P AL	035 P	045 P	OHI 035 P/M AL	035 S	045 S	OHI 035 S/S AL	035 C	045 C	OHI 035 C/A AL
	060 Q	072 Q	OHI 060 Q/P AL	060 P	072 P	OHI 060 P/M AL	060 S	072 S	OHI 060 S/S AL	060 C	072 C	OHI 060 C/A AL
	090 Q			090 P			090 S			090 C		
	110 Q	/	OHI 090 Q/P AL	110 P	/	OHI 090 P/M AL	110 S	/	OHI 090 S/S AL	110 C	/	OHI 090 C/A AL
	120 Q	205 Q	OHI 120 Q/P AL	120 P	205 P	OHI 120 P/M AL	120 S	205 S	OHI 120 S/S AL	120 C	205 C	OHI 120 C/A AL
	151 Q			151 P			151 S			151 C		
	150 Q	/	OHI 150 Q/P AL	150 P	/	OHI 150 P/M AL	150 S	/	OHI 150 S/S AL	150 C	/	OHI 150 C/A AL
	180 Q			180 P			180 S			180 C		
	200 Q	260 Q	OHI 200 Q/P AL	200 P	260 P	OHI 200 P/M AL	200 S	260 S	OHI 200 S/S AL	200 C	260 C	OHI 200 C/A AL
	240 Q	/	OHI 240 Q/P AL	240 P	/	OHI 240 P/M AL	240 S	/	OHI 240 S/S AL	240 C	/	OHI 240 C/A AL
	280 Q			280 P			280 S			280 C		

* Valid if "S" filter cartridge is installed upstream.



ALTERNATIVE FILTER ELEMENTS

HITACHI

	HA	HM	HK
HITACHI Aluminium end caps			
Particle retention	1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	3	1	1*
Oils -q. class (ISO 8573-1)	-	1	1
Filter media	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	20	80	60

	HA		HM		HK	
	HITACHI	OMEGA AIR	HITACHI	OMEGA AIR	HITACHI	OMEGA AIR
	HA-7.5B	OHT 7.5B HA/R AI	HM-7.5B	OHT 7.5B HM/S AI	HK-7.5B	OHT 7.5B HK/A AI
	HA-11B	OHT 11B HA/R AI	HM-11B	OHT 11B HM/S AI	HK-11B	OHT 11B HK/A AI
	HA-15B	OHT 15B HA/R AI	HM-15B	OHT 15B HM/S AI	HK-15B	OHT 15B HK/A AI
	HA-22B	OHT 22B HA/R AI	HM-22B	OHT 22B HM/S AI	HK-22B	OHT 22B HK/A AI
	HA-37B	OHT 37B HA/R AI	HM-37B	OHT 37B HM/S AI	HK-37B	OHT 37B HK/A AI
	HA-55B	OHT 55B HA/R AI	HM-55B	OHT 55B HM/S AI	HK-55B	OHT 55B HK/A AI
	HA-75B	OHT 75B HA/R AI	HM-75B	OHT 75B HM/S AI	HK-75B	OHT 75B HK/A AI
	HA-100B	OHT 100B HA/R AI	HM-100B	OHT 100B HM/S AI	HK-100B	OHT 100B HK/A AI

* Valid if "S" filter cartridge is installed upstream.


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

INGERSOLL RAND

	GP	HE	AC
INGERSOLL RAND Plastic end caps			
Particle retention	1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	3	1	1*
Oils -q. class (ISO 8573-1)	-	1	1
Filter media	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	20	80	60

	GP		HE		AC	
	INGERSOLL RAND	OMEGA AIR	INGERSOLL RAND	OMEGA AIR	INGERSOLL RAND	OMEGA AIR
19 GP		OIR 19 GP/R	19 HE	OIR 19 HE/S	19 AC	OIR 19 AC/A
40 GP		OIR 40 GP/R	40 HE	OIR 40 HE/S	40 AC	OIR 40 AC/A
64 GP		OIR 64 GP/R	64 HE	OIR 64 HE/S	64 AC	OIR 64 AC/A
123 GP		OIR 123 GP/R	123 HE	OIR 123 HE/S	123 AC	OIR 123 AC/A
216 GP		OIR 216 GP/R	216 HE	OIR 216 HE/S	216 AC	OIR 216 AC/A
275 GP		OIR 275 GP/R	275 HE	OIR 275 HE/S	275 AC	OIR 275 AC/A
350 GP		OIR 350 GP/R	350 HE	OIR 350 HE/S	350 AC	OIR 350 AC/A
481 GP		OIR 481 GP/R	481 HE	OIR 481 HE/S	481 AC	OIR 481 AC/A
563 GP		OIR 563 GP/R	563 HE	OIR 563 HE/S	563 AC	OIR 563 AC/A
706 GP		OIR 706 GP/R	706 HE	OIR 706 HE/S	706 AC	OIR 706 AC/A
850 GP		OIR 850 GP/R	850 HE	OIR 850 HE/S	850 AC	OIR 850 AC/A
1100 GP		OIR 1100 GP/R	1100 HE	OIR 1100 HE/S	1100 AC	OIR 1100 AC/A
1380 GP		OIR 1380 GP/R	1380 HE	OIR 1380 HE/S	1380 AC	OIR 1380 AC/A
Flanged			Flanged		Flanged	
424 GP		OIR 424 GP/R	424 HE	OIR 424 HE/S	424 AC	OIR 424 AC/A
699 GP		OIR 699 GP/R	699 HE	OIR 699 HE/S	699 AC	OIR 699 AC/A
1314 GP		OIR 1314 GP/R	1314 HE	OIR 1314 HE/S	1314 AC	OIR 1314 AC/A

* Valid if "S" filter cartridge is installed upstream.



INGERSOLL RAND F

	IG	IH	IA
INGERSOLL RAND F Plastic end caps			
Particle retention	1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	3	1	1*
Oils -q. class (ISO 8573-1)	-	1	1
Filter media	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	20	80	60

	IG		IH		IA	
	INGERSOLL RAND	OMEGA AIR	INGERSOLL RAND	OMEGA AIR	INGERSOLL RAND	OMEGA AIR
	F35 IG	OIR F35 IG/R	F35 IH	OIR F35 IH/S	F35 IA	OIR F35 IA/A
	F71 IG	OIR F71 IG/R	F71 IH	OIR F71 IH/S	F71 IA	OIR F71 IA/A
	F108 IG	OIR F108 IG/R	F108 IH	OIR F108 IH/S	F108 IA	OIR F108 IA/A
	F144 IG	OIR F144 IG/R	F144 IH	OIR F144 IH/S	F144 IA	OIR F144 IA/A
	F178 IG	OIR F178 IG/R	F178 IH	OIR F178 IH/S	F178 IA	OIR F178 IA/A
	F212 IG	OIR F212 IG/R	F212 IH	OIR F212 IH/S	F212 IA	OIR F212 IA/A
	F395 IG	OIR F395 IG/R	F395 IH	OIR F395 IH/S	F395 IA	OIR F395 IA/A
	F424 IG	OIR F424 IG/R	F424 IH	OIR F424 IH/S	F424 IA	OIR F424 IA/A
	F577 IG	OIR F577 IG/R	F577 IH	OIR F577 IH/S	F577 IA	OIR F577 IA/A
	F791 IG	OIR F791 IG/R	F791 IH	OIR F791 IH/S	F791 IA	OIR F791 IA/A
	F985 IG	OIR F985 IG/R	F985 IH	OIR F985 IH/S	F985 IA	OIR F985 IA/A
	F1155 IG	OIR F1155 IG/R	F1155 IH	OIR F1155 IH/S	F1155 IA	OIR F1155 IA/A
	F1529 IG	OIR F1529 IG/R	F1529 IH	OIR F1529 IH/S	F1529 IA	OIR F1529 IA/A
	F1817 IG	OIR F1817 IG/R	F1817 IH	OIR F1817 IH/S	F1817 IA	OIR F1817 IA/A
	F2378 IG	OIR F2378 IG/R	F2124 IH	OIR F2124 IH/S	F2378 IA	OIR F2378 IA/A
	Flanged		Flanged		Flanged	
	F770 IG	OIR F770 IG/R	F770 IH	OIR F770 IH/S	F770 IA	OIR F770 IA
	F1320 IG	OIR F1320 IG/R	F1320 IH	OIR F1320 IH/S	F1320 IA	OIR F1320 IA
	F2100 IG	OIR F2100 IG/R	F2100 IH	OIR F2100 IH/S	F2100 IA	OIR F2100 IA
	F2800 IG	OIR F2800 IG/R	F2800 IH	OIR F2800 IH/S	F2800 IA	OIR F2800 IA
	F4200 IG	OIR F4200 IG/R	F4200 IH	OIR F4200 IH/S	F4200 IA	OIR F4200 IA
	F5700 IG	OIR F5700 IG/R	F5700 IH	OIR F5700 IH/S	F5700 IA	OIR F5700 IA
	F7500 IG	OIR F7500 IG/R	F7500 IH	OIR F7500 IH/S	F7500 IA	OIR F7500 IA
	F9300 IG	OIR F9300 IG/R	F9300 IH	OIR F9300 IH/S	F9300 IA	OIR F9300 IA
	F11000 IG	OIR F11000 IG/R	F11000 IH	OIR F11000 IH/S	F11000 IA	OIR F11000 IA
	F14200 IG	OIR F14200 IG/R	F14200 IH	OIR F14200 IH/S	F14200 IA	OIR F14200 IA
	F19900 IG	OIR F19900 IG/R	F19900 IH	OIR F19900 IH/S	F19900 IA	OIR F19900 IA
	F31000 IG	OIR F31000 IG/R	F31000 IH	OIR F31000 IH/S	F31000 IA	OIR F31000 IA

* Valid if "S" filter cartridge is installed upstream.


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

INGERSOLL RAND FA

	IG	IH	IA
INGERSOLL RAND FA Plastic end caps			
Particle retention	1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	3	1	1*
Oils -q. class (ISO 8573-1)	-	1	1
Filter media	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	20	80	60

	IG		IH		IA	
	INGERSOLL RAND	OMEGA AIR	INGERSOLL RAND	OMEGA AIR	INGERSOLL RAND	OMEGA AIR
FA30 IG		OIR FA30 IG/R	FA30 IH	OIR FA30 IH/S	FA30 IA	OIR FA30 IA/A
FA40 IG		OIR FA40 IG/R	FA40 IH	OIR FA40 IH/S	FA40 IA	OIR FA40 IA/A
FA75 IG		OIR FA75 IG/R	FA75 IH	OIR FA75 IH/S	FA75 IA	OIR FA75 IA/A
FA110 IG		OIR FA110 IG/R	FA110 IH	OIR FA110 IH/S	FA110 IA	OIR FA110 IA/A
FA150 IG		OIR FA150 IG/R	FA150 IH	OIR FA150 IH/S	FA150 IA	OIR FA150 IA/A
FA190 IG		OIR FA190 IG/R	FA190 IH	OIR FA190 IH/S	FA190 IA	OIR FA190 IA/A
FA230 IG		OIR FA230 IG/R	FA230 IH	OIR FA230 IH/S	FA230 IA	OIR FA230 IA/A
FA400 IG		OIR FA400 IG/R	FA400 IH	OIR FA400 IH/S	FA400 IA	OIR FA400 IA/A
FA490 IG		OIR FA490 IG/R	FA490 IH	OIR FA490 IH/S	FA490 IA	OIR FA490 IA/A
FA600 IG		OIR FA600 IG/R	FA600 IH	OIR FA600 IH/S	FA600 IA	OIR FA600 IA/A
FA800 IG		OIR FA800 IG/R	FA800 IH	OIR FA800 IH/S	FA800 IA	OIR FA800 IA/A
FA1000 IG		OIR FA1000 IG/R	FA1000 IH	OIR FA1000 IH/S	FA1000 IA	OIR FA1000 IA/A
FA1200 IG		OIR FA1200 IG/R	FA1200 IH	OIR FA1200 IH/S	FA1200 IA	OIR FA1200 IA/A
FA1560 IG		OIR FA1560 IG/R	FA1560 IH	OIR FA1560 IH/S	FA1560 IA	OIR FA1560 IA/A
FA1830 IG		OIR FA1830 IG/R	FA1830 IH	OIR FA1830 IH/S	FA1830 IA	OIR FA1830 IA/A
FA2300 IG		OIR FA2300 IG/R	FA2300 IH	OIR FA2300 IH/S	FA2300 IA	OIR FA2300 IA/A
FA2700 IG		OIR FA2700 IG/R	FA2700 IH	OIR FA2700 IH/S	FA2700 IA	OIR FA2700 IA/A

* Valid if "S" filter cartridge is installed upstream.



ALTERNATIVE FILTER ELEMENTS

KAESER [old]

	E-B	E-C	E-E	E-F	E-G
KAESER (old) Aluminium end caps					
Particle retention	3 µm	1 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	3	2	1	1*
Oils -q. class (ISO 8573-1)	-	-	2	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres			activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	20	50	80	60

	E-B		E-C		E-E		E-F		E-G	
	KAESER	OMEGA AIR	KAESER	OMEGA AIR	KAESER	OMEGA AIR	KAESER	OMEGA AIR	KAESER	OMEGA AIR
E-B-6		OKA 6 E-B/P AL	E-C-6	OKA 6 E-C/R AL	E-E-6	OKA 6 E-E/M AL	E-F-6	OKA 6 E-F/S AL	E-G-6	OKA 6 E-G/A AL
E-B-10		OKA 10 E-B/P AL	E-C-10	OKA 10 E-C/R AL	E-E-10	OKA 10 E-E/M AL	E-F-10	OKA 10 E-F/S AL	E-G-10	OKA 10 E-G/A AL
E-B-18		OKA 18 E-B/P AL	E-C-18	OKA 18 E-C/R AL	E-E-18	OKA 18 E-E/M AL	E-F-18	OKA 18 E-F/S AL	E-G-18	OKA 18 E-G/A AL
E-B-28		OKA 28 E-B/P AL	E-C-28	OKA 28 E-C/R AL	E-E-28	OKA 28 E-E/M AL	E-F-28	OKA 28 E-F/S AL	E-G-28	OKA 28 E-G/A AL
E-B-48		OKA 48 E-B/P AL	E-C-48	OKA 48 E-C/R AL	E-E-48	OKA 48 E-E/M AL	E-F-48	OKA 48 E-F/S AL	E-G-48	OKA 48 E-G/A AL
E-B-71		OKA 71 E-B/P AL	E-C-71	OKA 71 E-C/R AL	E-E-71	OKA 71 E-E/M AL	E-F-71	OKA 71 E-F/S AL	E-G-71	OKA 71 E-G/A AL
E-B-107		OKA 107 E-B/P AL	E-C-107	OKA 107 E-C/R AL	E-E-107	OKA 107 E-E/M AL	E-F-107	OKA 107 E-F/S AL	E-G-107	OKA 107 E-G/A AL
E-B-138		OKA 138 E-B/P AL	E-C-138	OKA 138 E-C/R AL	E-E-138	OKA 138 E-E/M AL	E-F-138	OKA 138 E-F/S AL	E-G-138	OKA 138 E-G/A AL
E-B-177		OKA 177 E-B/P AL	E-C-177	OKA 177 E-C/R AL	E-E-177	OKA 177 E-E/M AL	E-F-177	OKA 177 E-F/S AL	E-G-177	OKA 177 E-G/A AL
E-B-221		OKA 221 E-B/P AL	E-C-221	OKA 221 E-C/R AL	E-E-221	OKA 221 E-E/M AL	E-F-221	OKA 221 E-F/S AL	E-G-221	OKA 221 E-G/A AL
E-B-185		OKA 185 E-B/P AL	E-C-185	OKA 185 E-C/R AL	E-E-185	OKA 185 E-E/M AL	E-F-185	OKA 185 E-F/S AL	E-G-185	OKA 185 E-G/A AL
E-B-283		OKA 283 E-B/P AL	E-C-283	OKA 283 E-C/R AL	E-E-283	OKA 283 E-E/M AL	E-F-283	OKA 283 E-F/S AL	E-G-283	OKA 283 E-G/A AL

* Valid if "S" filter cartridge is installed upstream.


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

KAESER HP

KAESER Aluminium end caps	E-B	E-C	E-E
Particle retention	3 µm	1 µm	0,1 µm
Solids - q. class (ISO 8573-1)	6	3	2
Oils -q. class (ISO 8573-1)	-	-	2
Filter media	acrylic fibres, cellulose	borosilicate micro fibres	
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65
Diff. pressure (new) [mbar]	10	20	50

	E-B		E-C		E-E	
	KAESER	OMEGA AIR	KAESER	OMEGA AIR	KAESER	OMEGA AIR
	E-B-18/28 HP 62	OKA 18/28 HP -B/P AI	E-C-18/28 HP 62	OKA 18/28 HP -C/R AI	E-E-18/28 HP 62	OKA 18/28 HP -E/M AI
	E-B-71 HP 62	OKA 71 HP E-B/P AI	E-C-71 HP 62	OKA 71 HP E-C/R AI	E-E-71 HP 62	OKA 71 HP E-E/M AI
	E-B-283 HP 62	OKA 283 HP E-B/P AI	E-C-283 HP 62	OKA 283 HP E-C/R AI	E-E-283 HP 62	OKA 283 HP E-E/M AI

* Valid if "S" filter cartridge is installed upstream.

	E-F	E-G
		
KAESER		
Aluminium end caps		
Particle retention	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	1	1*
Oils -q. class (ISO 8573-1)	1	1
Filter media		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	80	60

	E-F		E-G	
	KAESER	OMEGA AIR	KAESER	OMEGA AIR
E-F-18/28 HP 62	OKA 18/28 HP E-F/S Al		E-G-18/28 HP 62	OKA 18/28 HP E-G/A Al
E-F-71 HP 62	OKA 71 HP E-F/S Al		E-G-71 HP 62	OKA 71 HP E-G/A Al
E-F-283 HP 62	OKA 283 HP E-F/S Al		E-G-283 HP 62	OKA 283 HP E-G/A Al


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

KNOCKS

	V	X	A
KNOCKS Aluminium end caps			
Particle retention	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	2	1	1*
Oils -q. class (ISO 8573-1)	2	1	1
Filter media	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	50	80	60

	V		X		A	
	KNOCKS	OMEGA AIR	KNOCKS	OMEGA AIR	KNOCKS	OMEGA AIR
V 23/35		OKN 2335 V/M AL	X 23/35	OKN 2335 X/S AL	-	OKN 2335 A/A AL
V 23/40		OKN 2340 V/M AL	-	-	-	-
V 23/60		OKN 2360 V/M AL	X 23/60	OKN 2360 X/S AL	A 23/60	OKN 2360 A/A AL
-	-	-	X 23/70	OKN 2370 X/S AL	A 23/70	OKN 2370 A/A AL
-	-	-	-	-	A 23/80	OKN 2380 A/A AL
V 38/60		OKN 3860 V/M AL	X 38/60	OKN 3860 X/S AL	-	-
-	-	-	-	-	A 38/90	OKN 3890 A/A AL
V 38/100		OKN 38100 V/M AL	X 38/100	OKN 38100 X/S AL	-	-
V 38/185		OKN 38185 V/M AL	X 38/185	OKN 38185 X/S AL	A 38/185	OKN 38185 A/A AL
V 61/130		OKN 61130 V/M AL	X 61/130	OKN 61130 X/S AL	A 61/130	OKN 61130 A/A AL
V 61/230		OKN 61230 V/M AL	X 61/230	OKN 61230 X/S AL	A 61/230	OKN 61230 A/A AL

* Valid if "S" filter cartridge is installed upstream.

**ALTERNATIVE
FILTER ELEMENTS**

KOBELCO

	KO	KA	KCS
KOBELCO Plastic end caps			
Particle retention	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	2	1	1*
Oils -q. class (ISO 8573-1)	2	1	1
Filter media	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	50	80	60

	KO		KA		KCS	
	KOBELCO	OMEGA AIR	KOBELCO	OMEGA AIR	KOBELCO	OMEGA AIR
	KO 060	OKO 060 KO/M	KA 060	OKO 060 KA/S	KCS 060	OKO 060 KCS/A
	KO 120	OKO 120 KO/M	KA 120	OKO 120 KA/S	KCS 120	OKO 120 KCS/A
	KO 180	OKO 180 KO/M	KA 180	OKO 180 KA/S	KCS 180	OKO 180 KCS/A
	KO 370	OKO 370 KO/M	KA 370	OKO 370 KA/S	KCS 370	OKO 370 KCS/A
	KO 660	OKO 660 KO/M	KA 660	OKO 660 KA/S	KCS 660	OKO 660 KCS/A
	KO 960	OKO 960 KO/M	KA 960	OKO 960 KA/S	KCS 960	OKO 960 KCS/A
	KO 1320	OKO 1320 KO/M	KA 1320	OKO 1320 KA/S	KCS 1320	OKO 1320 KCS/A
	KO 1980	OKO 1980 KO/M	KA 1980	OKO 1980 KA/S	KCS 1980	OKO 1980 KCS/A
	KO 2580	OKO 2580 KO/M	KA 2580	OKO 2580 KA/S	KCS 2580	OKO 2580 KCS/A

* Valid if "S" filter cartridge is installed upstream.


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

KSI

	FF5	MFO	SMA	CA
KSI Plastic end caps				
Particle retention	3 µm	1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	3	1	1*
Oils -q. class (ISO 8573-1)	-	-	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	20	80	60

	FF5		MFO		SMA		CA	
	KSI	OMEGA AIR	KSI	OMEGA AIR	KSI	OMEGA AIR	KSI	OMEGA AIR
	GTE3711	OKS 3711 FF5/P	GTE3711	OKS 3711 MFO/R	GTE3711	OKS 3711 SMA/S	GTE3711	OKS 3711 CA/A
	GTE5111	OKS 5111 FF5/P	GTE5111	OKS 5111 MFO/R	GTE5111	OKS 5111 SMA/S	GTE5111	OKS 5111 CA/A
	GTE7111	OKS 7111 FF5/P	GTE7111	OKS 7111 MFO/R	GTE7111	OKS 7111 SMA/S	GTE7111	OKS 7111 CA/A
	GTE7311	OKS 7311 FF5/P	GTE7311	OKS 7311 MFO/R	GTE7311	OKS 7311 SMA/S	GTE7311	OKS 7311 CA/A
	GTE7411	OKS 7411 FF5/P	GTE7411	OKS 7411 MFO/R	GTE7411	OKS 7411 SMA/S	GTE7411	OKS 7411 CA/A
	GTE8501	OKS 8501 FF5/P	GTE8501	OKS 8501 MFO/R	GTE8501	OKS 8501 SMA/S	GTE8501	OKS 8501 CA/A
	GTE8601	OKS 8601 FF5/P	GTE8601	OKS 8601 MFO/R	GTE8601	OKS 8601 SMA/S	GTE8601	OKS 8601 CA/A
	GTE8701	OKS 8701 FF5/P	GTE8701	OKS 8701 MFO/R	GTE8701	OKS 8701 SMA/S	GTE8701	OKS 8701 CA/A
	GTE8901	OKS 8901 FF5/P	GTE8901	OKS 8901 MFO/R	GTE8901	OKS 8901 SMA/S	GTE8901	OKS 8901 CA/A

* Valid if "S" filter cartridge is installed upstream.


**OMEGA
AIR**

ALTERNATIVE FILTER ELEMENTS

MARK (new)

	P	G	C	V
MARK (new) Plastic end caps				
Particle retention	1 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	3	2	1	1*
Oils -q. class (ISO 8573-1)	-	2	1	1
Filter media	borosilicate micro fibres			activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	20	50	80	60

	P		G		C		V	
	MARK	OMEGA AIR	MARK	OMEGA AIR	MARK	OMEGA AIR	MARK	OMEGA AIR
FILTER 7		OMA 7 P/R	FILTER 7	OMA 7 G/M	FILTER 7	OMA 7 C/S	FILTER 7	OMA 7 V/A
FILTER 15		OMA 15 P/R	FILTER 15	OMA 15 G/M	FILTER 15	OMA 15 C/S	FILTER 15	OMA 15 V/A
FILTER 21		OMA 21 P/R	FILTER 21	OMA 21 G/M	FILTER 21	OMA 21 C/S	FILTER 21	OMA 21 V/A
FILTER 30		OMA 30 P/R	FILTER 30	OMA 30 G/M	FILTER 30	OMA 30 C/S	FILTER 30	OMA 30 V/A
FILTER 48		OMA 48 P/R	FILTER 48	OMA 48 G/M	FILTER 48	OMA 48 C/S	FILTER 48	OMA 48 V/A
FILTER 84		OMA 84 P/R	FILTER 84	OMA 84 G/M	FILTER 84	OMA 84 C/S	FILTER 84	OMA 84 V/A
FILTER 114		OMA 114 P/R	FILTER 114	OMA 114 G/M	FILTER 114	OMA 114 C/S	FILTER 114	OMA 114 V/A
FILTER 156		OMA 156 P/R	FILTER 156	OMA 156 G/M	FILTER 156	OMA 156 C/S	FILTER 156	OMA 156 V/A
FILTER 216		OMA 216 P/R	FILTER 216	OMA 216 G/M	FILTER 216	OMA 216 C/S	FILTER 216	OMA 216 V/A
FILTER 315		OMA 315 P/R	FILTER 315	OMA 315 G/M	FILTER 315	OMA 315 C/S	FILTER 315	OMA 315 V/A
FILTER 405		OMA 405 P/R	FILTER 405	OMA 405 G/M	FILTER 405	OMA 405 C/S	FILTER 405	OMA 405 V/A

* Valid if "S" filter cartridge is installed upstream.


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

MARK (old)

	MBP	MBM	MBS	MBA
MARK (old) Plastic end caps				
Particle retention	3 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	2	1	1*
Oils -q. class (ISO 8573-1)	-	2	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	50	80	60

	MBP		MBM		MBS		MBA	
	MARK	OMEGA AIR	MARK	OMEGA AIR	MARK	OMEGA AIR	MARK	OMEGA AIR
	MBP 10	OMA 10 MBP/P	MBM 10	OMA 10 MBM/M	MBS 10	OMA 10 MBS/S	MBA 10	OMA 10 MBA/A
	MBP 13	OMA 13 MBP/P	MBM 13	OMA 13 MBM/M	MBS 13	OMA 13 MBS/S	MBA 13	OMA 13 MBA/A
	MBP 20	OMA 20 MBP/P	MBM 20	OMA 20 MBM/M	MBS 20	OMA 20 MBS/S	MBA 20	OMA 20 MBA/A
	MBP 33	OMA 33 MBP/P	MBM 33	OMA 33 MBM/M	MBS 33	OMA 33 MBS/S	MBA 33	OMA 33 MBA/A
	MBP 60	OMA 60 MBP/P	MBM 60	OMA 60 MBM/M	MBS 60	OMA 60 MBS/S	MBA 60	OMA 60 MBA/A
	MBP 85	OMA 85 MBP/P	MBM 85	OMA 85 MBM/M	MBS 85	OMA 85 MBS/S	MBA 85	OMA 85 MBA/A
	MBP 130	OMA 130 MBP/P	MBM 130	OMA 130 MBM/M	MBS 130	OMA 130 MBS/S	MBA 130	OMA 130 MBA/A
	MBP 170	OMA 170 MBP/P	MBM 170	OMA 170 MBM/M	MBS 170	OMA 170 MBS/S	MBA 170	OMA 170 MBA/A
	MBP 250	OMA 250 MBP/P	MBM 250	OMA 250 MBM/M	MBS 250	OMA 250 MBS/S	MBA 250	OMA 250 MBA/A
	MBP 400	OMA 400 MBP/P	MBM 400	OMA 400 MBM/M	MBS 400	OMA 400 MBS/S	MBA 400	OMA 400 MBA/A

* Valid if "S" filter cartridge is installed upstream.



MATTEI OMAT

	C3	C2	C1	CC
MATTEI OMAT Plastic end caps				
Particle retention	3 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	2	1	1*
Oils -q. class (ISO 8573-1)	-	2	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	50	80	60

	C3		C2		C1		CC	
	MATTEI OMAT	OMEGA AIR	MATTEI OMAT	OMEGA AIR	MATTEI OMAT	OMEGA AIR	MATTEI OMAT	OMEGA AIR
	0005 C3	OMAT 0005 C3/P	0005 C2	OMAT 0005 C2/M	0005 C1	OMAT 0005 C1/S	0005 CC	OMAT 0005 CC/A
	0010 C3	OMAT 0010 C3/P	0010 C2	OMAT 0010 C2/M	0010 C1	OMAT 0010 C1/S	0010 CC	OMAT 0010 CC/A
	0018 C3	OMAT 0018 C3/P	0018 C2	OMAT 0018 C2/M	0018 C1	OMAT 0018 C1/S	0018 CC	OMAT 0018 CC/A
	0030 C3	OMAT 0030 C3/P	0030 C2	OMAT 0030 C2/M	0030 C1	OMAT 0030 C1/S	0030 CC	OMAT 0030 CC/A
	0035 C3	OMAT 0035 C3/P	0035 C2	OMAT 0035 C2/M	0035 C1	OMAT 0035 C1/S	0035 CC	OMAT 0035 CC/A
	0050 C3	OMAT 0050 C3/P	0050 C2	OMAT 0050 C2/M	0050 C1	OMAT 0050 C1/S	0050 CC	OMAT 0050 CC/A
	0072 C3	OMAT 0072 C3/P	0072 C2	OMAT 0072 C2/M	0072 C1	OMAT 0072 C1/S	0072 CC	OMAT 0072 CC/A
	0095 C3	OMAT 0095 C3/P	0095 C2	OMAT 0095 C2/M	0095 C1	OMAT 0095 C1/S	0095 CC	OMAT 0095 CC/A
	0125 C3	OMAT 0125 C3/P	0125 C2	OMAT 0125 C2/M	0125 C1	OMAT 0125 C1/S	0125 CC	OMAT 0125 CC/A
	0165 C3	OMAT 0165 C3/P	0165 C2	OMAT 0165 C2/M	0165 C1	OMAT 0165 C1/S	0165 CC	OMAT 0165 CC/A
	0190 C3	OMAT 0190 C3/P	0190 C2	OMAT 0190 C2/M	0190 C1	OMAT 0190 C1/S	0190 CC	OMAT 0190 CC/A
	0220 C3	OMAT 0220 C3/P	0220 C2	OMAT 0220 C2/M	0220 C1	OMAT 0220 C1/S	0220 CC	OMAT 0220 CC/A
	0280 C3	OMAT 0280 C3/P	0280 C2	OMAT 0280 C2/M	0280 C1	OMAT 0280 C1/S	0280 CC	OMAT 0280 CC/A
	0350 C3	OMAT 0350 C3/P	0350 C2	OMAT 0350 C2/M	0350 C1	OMAT 0350 C1/S	0350 CC	OMAT 0350 CC/A
	0440 C3	OMAT 0440 C3/P	0440 C2	OMAT 0440 C2/M	0440 C1	OMAT 0440 C1/S	0440 CC	OMAT 0440 CC/S

* Valid if "S" filter cartridge is installed upstream.


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

MAUGUIERE (new)

	P	G	C	V
MAUGUIERE (new) Plastic end caps				
Particle retention	1 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	3	2	1	1*
Oils -q. class (ISO 8573-1)	-	2	1	1
Filter media	borosilicate micro fibres			activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	20	50	80	60

	P		G		C		V	
	MAUGUIERE	OMEGA AIR	MAUGUIERE	OMEGA AIR	MAUGUIERE	OMEGA AIR	MAUGUIERE	OMEGA AIR
FILTER 7		OMG 7 P/R	FILTER 7	OMG 7 G/M	FILTER 7	OMG 7 C/S	FILTER 7	OMG 7 V/A
FILTER 15		OMG 15 P/R	FILTER 15	OMG 15 G/M	FILTER 15	OMG 15 C/S	FILTER 15	OMG 15 V/A
FILTER 21		OMG 21 P/R	FILTER 21	OMG 21 G/M	FILTER 21	OMG 21 C/S	FILTER 21	OMG 21 V/A
FILTER 30		OMG 30 P/R	FILTER 30	OMG 30 G/M	FILTER 30	OMG 30 C/S	FILTER 30	OMG 30 V/A
FILTER 48		OMG 48 P/R	FILTER 48	OMG 48 G/M	FILTER 48	OMG 48 C/S	FILTER 48	OMG 48 V/A
FILTER 84		OMG 84 P/R	FILTER 84	OMG 84 G/M	FILTER 84	OMG 84 C/S	FILTER 84	OMG 84 V/A
FILTER 114		OMG 114 P/R	FILTER 114	OMG 114 G/M	FILTER 114	OMG 114 C/S	FILTER 114	OMG 114 V/A
FILTER 156		OMG 156 P/R	FILTER 156	OMG 156 G/M	FILTER 156	OMG 156 C/S	FILTER 156	OMG 156 V/A
FILTER 216		OMG 216 P/R	FILTER 216	OMG 216 G/M	FILTER 216	OMG 216 C/S	FILTER 216	OMG 216 V/A
FILTER 315		OMG 315 P/R	FILTER 315	OMG 315 G/M	FILTER 315	OMG 315 C/S	FILTER 315	OMG 315 V/A
FILTER 405		OMG 405 P/R	FILTER 405	OMG 405 G/M	FILTER 405	OMG 405 C/S	FILTER 405	OMG 405 V/A

* Valid if "S" filter cartridge is installed upstream.


**OMEGA
AIR**

ALTERNATIVE FILTER ELEMENTS

MAUGUIERE (old)

	MBP	MBM	MBS	MBA
MAUGUIERE (old) Plastic end caps				
Particle retention	3 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	2	1	1*
Oils -q. class (ISO 8573-1)	-	2	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	50	80	60

	MBP		MBM		MBS		MBA	
	MAUGUIERE	OMEGA AIR	MAUGUIERE	OMEGA AIR	MAUGUIERE	OMEGA AIR	MAUGUIERE	OMEGA AIR
	MBP 10	OMG 10 MBP/P	MBM 10	OMG 10 MBM/M	MBS 10	OMG 10 MBS/S	MBA 10	OMG 10 MBA/A
	MBP 13	OMG 13 MBP/P	MBM 13	OMG 13 MBM/M	MBS 13	OMG 13 MBS/S	MBA 13	OMG 13 MBA/A
	MBP 20	OMG 20 MBP/P	MBM 20	OMG 20 MBM/M	MBS 20	OMG 20 MBS/S	MBA 20	OMG 20 MBA/A
	MBP 33	OMG 33 MBP/P	MBM 33	OMG 33 MBM/M	MBS 33	OMG 33 MBS/S	MBA 33	OMG 33 MBA/A
	MBP 60	OMG 60 MBP/P	MBM 60	OMG 60 MBM/M	MBS 60	OMG 60 MBS/S	MBA 60	OMG 60 MBA/A
	MBP 85	OMG 85 MBP/P	MBM 85	OMG 85 MBM/M	MBS 85	OMG 85 MBS/S	MBA 85	OMG 85 MBA/A
	MBP 130	OMG 130 MBP/P	MBM 130	OMG 130 MBM/M	MBS 130	OMG 130 MBS/S	MBA 130	OMG 130 MBA/A
	MBP 170	OMG 170 MBP/P	MBM 170	OMG 170 MBM/M	MBS 170	OMG 170 MBS/S	MBA 170	OMG 170 MBA/A
	MBP 250	OMG 250 MBP/P	MBM 250	OMG 250 MBM/M	MBS 250	OMG 250 MBS/S	MBA 250	OMG 250 MBA/A
	MBP 400	OMG 400 MBP/P	MBM 400	OMG 400 MBM/M	MBS 400	OMG 400 MBS/S	MBA 400	OMG 400 MBA/A

* Valid if "S" filter cartridge is installed upstream.


OMEGA
AIR

ALTERNATIVE STERILE FILTER ELEMENTS

MIKROPOR G

	P	X	Y	A
MIKROPOR G Aluminium end caps				
Particle retention	3 µm	1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	3	1	1*
Oils - q. class (ISO 8573-1)	-	-	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	20	80	60

	P		X		Y		A	
	MIKROPOR	OMEGA AIR	MIKROPOR	OMEGA AIR	MIKROPOR	OMEGA AIR	MIKROPOR	OMEGA AIR
G24 P		OMP M24 P/P AL	G24 X	OMP M24 X/R AL	G24 Y	OMP M24 Y/S AL	G24 A	OMP M24 A/A AL
G48 P		OMP M48 P/P AL	G48 X	OMP M48 X/R AL	G48 Y	OMP M48 Y/S AL	G48 A	OMP M48 A/A AL
G25 P		OMP M25 P/P AL	G25 X	OMP M25 X/R AL	G25 Y	OMP M25 Y/S AL	G25 A	OMP M25 A/A AL
G50 P		OMP M50 P/P AL	G50 X	OMP M50 X/R AL	G50 Y	OMP M50 Y/S AL	G50 A	OMP M50 A/A AL
G100 P		OMP M100 P/P AL	G100 X	OMP M100 X/R AL	G100 Y	OMP M100 Y/S AL	G100 A	OMP M100 A/A AL
G150 P		OMP M150 P/P AL	G150 X	OMP M150 X/R AL	G150 Y	OMP M150 Y/S AL	G150 A	OMP M150 A/A AL
G200 P		OMP M200 P/P AL	G200 X	OMP M200 X/R AL	G200 Y	OMP M200 Y/S AL	G200 A	OMP M200 A/A AL
G250 P		OMP M250 P/P AL	G250 X	OMP M250 X/R AL	G250 Y	OMP M250 Y/S AL	G250 A	OMP M250 A/A AL
G300 P		OMP M300 P/P AL	G300 X	OMP M300 X/R AL	G300 Y	OMP M300 Y/S AL	G300 A	OMP M300 A/A AL
G500 P		OMP M500 P/P AL	G500 X	OMP M500 X/R AL	G500 Y	OMP M500 Y/S AL	G500 A	OMP M500 A/A AL
G600 P		OMP M600 P/P AL	G600 X	OMP M600 X/R AL	G600 Y	OMP M600 Y/S AL	G600 A	OMP M600 A/A AL
G851 P		OMP M851 P/P AL	G851 X	OMP M851 X/R AL	G851 Y	OMP M851 Y/S AL	G851 A	OMP M851 A/A AL
G1210 P		OMP M1210 P/P AL	G1210 X	OMP M1210 X/R AL	G1210 Y	OMP M1210 Y/S AL	G1210 A	OMP M1210 A/A AL
G1510 P		OMP M1510 P/P AL	G1510 X	OMP M1510 X/R AL	G1510 Y	OMP M1510 Y/S AL	G1510 A	OMP M1510 A/A AL
G1810 P		OMP M1810 P/P AL	G1810 X	OMP M1810 X/R AL	G1810 Y	OMP M1810 Y/S AL	G1810 A	OMP M1810 A/A AL
G2210 P		OMP M2210 P/P AL	G2210 X	OMP M2210 X/R AL	G2210 Y	OMP M2210 Y/S AL	G2210 A	OMP M2210 A/A AL

* Valid if "S" filter cartridge is installed upstream.



MIKROPOR GO

	P	X	Y	A
MIKROPOR GO Plastic end caps				
Particle retention	3 µm	1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	3	1	1*
Oils - q. class (ISO 8573-1)	-	-	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	20	80	60

	P		X		Y		A	
	MIKROPOR	OMEGA AIR	MIKROPOR	OMEGA AIR	MIKROPOR	OMEGA AIR	MIKROPOR	OMEGA AIR
M020 P	OMP M020 P/P		M020 X	OMP M020 X/R	M020 Y	OMP M020 Y/S	M020 A	OMP M020 A/A
M040 P	OMP M040 P/P		M040 X	OMP M040 X/R	M040 Y	OMP M040 Y/S	M040 A	OMP M040 A/A
M025 P	OMP M025 P/P		M025 X	OMP M025 X/R	M025 Y	OMP M025 Y/S	M025 A	OMP M025 A/A
M050 P	OMP M050 P/P		M050 X	OMP M050 X/R	M050 Y	OMP M050 Y/S	M050 A	OMP M050 A/A
M0100 P	OMP M0100 P/P		M0100 X	OMP M0100 X/R	M0100 Y	OMP M0100 Y/S	M0100 A	OMP M0100 A/A
M0150 P	OMP M0150 P/P		M0150 X	OMP M0150 X/R	M0150 Y	OMP M0150 Y/S	M0150 A	OMP M0150 A/A
M0200 P	OMP M0200 P/P		M0200 X	OMP M0200 X/R	M0200 Y	OMP M0200 Y/S	M0200 A	OMP M0200 A/A
M0250 P	OMP M0250 P/P		M0250 X	OMP M0250 X/R	M0250 Y	OMP M0250 Y/S	M0250 A	OMP M0250 A/A
M0300 P	OMP M0300 P/P		M0300 X	OMP M0300 X/R	M0300 Y	OMP M0300 Y/S	M0300 A	OMP M0300 A/A
M0500 P	OMP M0500 P/P		M0500 X	OMP M0500 X/R	M0500 Y	OMP M0500 Y/S	M0500 A	OMP M0500 A/A
M0600 P	OMP M0600 P/P		M0600 X	OMP M0600 X/R	M0600 Y	OMP M0600 Y/S	M0600 A	OMP M0600 A/A
M0851 P	OMP M0851 P/P		M0851 X	OMP M0851 X/R	M0851 Y	OMP M0851 Y/S	M0851 A	OMP M0851 A/A
M01210 P	OMP M01210 P/P		M01210 X	OMP M01210 X/R	M01210 Y	OMP M01210 Y/S	M01210 A	OMP M01210 A/A
M01520 P	OMP M01520 P/P		M01520 X	OMP M01520 X/R	M01520 Y	OMP M01520 Y/S	M01520 A	OMP M01520 A/A
M01820 P	OMP M01820 P/P		M01820 X	OMP M01820 X/R	M01820 Y	OMP M01820 Y/S	M01820 A	OMP M01820 A/A
M02220 P	OMP M02220 P/P		M02220 X	OMP M02220 X/R	M02220 Y	OMP M02220 Y/S	M02220 A	OMP M02220 A/A
M02700 P	OMP M02700 P/P		M02700 X	OMP M02700 X/R	M02700 Y	OMP M02700 Y/S	M02700 A	OMP M02700 A/A

* Valid if "S" filter cartridge is installed upstream.


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

OMI ALPS

	QF	PF	HF	CF
OMI Alps Plastic end caps				
Particle retention	1 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	3	2	1	1*
Oils - q. class (ISO 8573-1)	-	2	1	1
Filter media	borosilicate micro fibres			activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	20	50	80	60

	QF		PF		HF		CF	
	OMI	OMEGA AIR	OMI	OMEGA AIR	OMI	OMEGA AIR	OMI	OMEGA AIR
	0030AQF	OOM A30 QF/R	0030APF	OOM A30 PF/M	0030AHF	OOM A30 HF/S	0030ACF	OOM A30 CF/A
	0040AQF	OOM A40 QF/R	0040APF	OOM A40 PF/M	0040AHF	OOM A40 HF/S	0040ACF	OOM A40 CF/A
	0075AQF	OOM A75 QF/R	0075APF	OOM A75 PF/M	0075AHF	OOM A75 HF/S	0075ACF	OOM A75 CF/A
	0110AQF	OOM A110 QF/R	0110APF	OOM A110 PF/M	0110AHF	OOM A110 HF/S	0110ACF	OOM A110 CF/A
	0190AQF	OOM A190 QF/R	0190APF	OOM A190 PF/M	0190AHF	OOM A190 HF/S	0190ACF	OOM A190 CF/A
	0260AQF	OOM A260 QF/R	0260APF	OOM A260 PF/M	0260AHF	OOM A260 HF/S	0260ACF	OOM A260 CF/A
	0400AQF	OOM A400 QF/R	0400APF	OOM A400 PF/M	0400AHF	OOM A400 HF/S	0400ACF	OOM F400 CF/A
	0500AQF	OOM A600 QF/R	0500APF	OOM A500 PF/M	0500AHF	OOM A500 HF/S	0500ACF	OOM F500 CF/A
	0800AQF	OOM A800 QF/R	0800APF	OOM A800 PF/M	0800AHF	OOM A800 HF/S	0800ACF	OOM F800 CF/A
	1000AQF	OOM A1000 QF/R	1000APF	OOM A1000 PF/M	1000AHF	OOM A1000 HF/S	1000ACF	OOM F1000 CF/A
	1300AQF	OOM A1300 QF/R	1300APF	OOM A1300 PF/M	1300AHF	OOM A1300 HF/S	1300ACF	OOM F1300 CF/A
	1560AQF	OOM A1560 QF/R	1560APF	OOM A1560 PF/M	1560AHF	OOM A1560 HF/S	1560ACF	OOM F1560 CF/A
	1830AQF	OOM A1830 QF/R	1830APF	OOM A1830 PF/M	1830AHF	OOM A1830 HF/S	1830ACF	OOM F1830 CF/A
	2700AQF	OOM A2700 QF/R	2700APF	OOM A2700 PF/M	2700AHF	OOM A2700 HF/S	2700ACF	OOM F2700 CF/A

* Valid if "S" filter cartridge is installed upstream.


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

OMI (old)

	QF	PF	HF	CF
OMI (old) Plastic end caps				
Particle retention	3 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	2	1	1*
Oils - q. class (ISO 8573-1)	-	2	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	50	80	60

	QF			PF			HF			CF		
	OMI old	OMI	OMEGA AIR	OMI old	OMI	OMEGA AIR	OMI old	OMI	OMEGA AIR	OMI old	OMI	OMEGA AIR
	0004 QF	0005 QF	OOM 0004 QF/P	0004 PF	0005 PF	OOM 0004 PF/M	0004 HF	0005 HF	OOM 0004 HF/S	0004 CF	0005 CF	OOM 0004 CF/A
	0008 QF	0010 QF	OOM 0008 QF/P	0008 PF	0010 PF	OOM 0008 PF/M	0008 HF	0010 HF	OOM 0008 HF/S	0008 CF	0010 CF	OOM 0008 CF/A
	0016 QF	0018 QF	OOM 0016 QF/P	0016 PF	0018 PF	OOM 0016 PF/M	0016 HF	0018 HF	OOM 0016 HF/S	0016 CF	0018 CF	OOM 0016 CF/A
	/	0030 QF	OOM 0030 QF/P	/	0030 PF	OOM 0030 PF/M	/	0030 HF	OOM 0030 HF/S	/	0030 CF	OOM 0030 CF/A
	0025 QF	0034 QF	OOM 0025 QF/P	0025 PF	0034 PF	OOM 0025 PF/M	0025 HF	0034 HF	OOM 0025 HF/S	0025 CF	0034 CF	OOM 0025 CF/A
	0036 QF	0050 QF	OOM 0036 QF/P	0036 PF	0050 PF	OOM 0036 PF/M	0036 HF	0050 HF	OOM 0036 HF/S	0036 CF	0050 CF	OOM 0036 CF/A
	/	0072 QF	OOM 0072 QF/P	/	0072 PF	OOM 0072 PF/M	/	0072 HF	OOM 0072 HF/S	/	0072 CF	OOM 0072 CF/A
	0060 QF	0095 QF	OOM 0060 QF/P	0060 PF	0095 PF	OOM 0060 PF/M	0060 HF	0095 HF	OOM 0060 HF/S	0060 CF	0095 CF	OOM 0060 CF/A
	0070 QF	/	OOM 0070 QF/P	0070 PF	/	OOM 0070 PF/M	0070 HF	/	OOM 0070 HF/S	0070 CF	/	OOM 0070 CF/A
	0090 QF	0125 QF	OOM 0090 QF/P	0090 PF	0125 PF	OOM 0090 PF/M	0090 HF	0125 HF	OOM 0090 HF/S	0090 CF	0125 CF	OOM 0090 CF/A
	0120 QF	0165 QF	OOM 0120 QF/P	0120 PF	0165 PF	OOM 0120 PF/M	0120 HF	0165 HF	OOM 0120 HF/S	0120 CF	0165 CF	OOM 0120 CF/A
	/	0190 QF	OOM 0190 QF/P	/	0190 PF	OOM 0190 PF/M	/	0190 HF	OOM 0190 HF/S	/	0190 CF	OOM 0190 CF/A
	0185 QF	0220 QF	OOM 0185 QF/P	0185 PF	0220 PF	OOM 0185 PF/M	0185 HF	0220 HF	OOM 0185 HF/S	0185 CF	0220 CF	OOM 0185 CF/A
	/	0280 QF	OOM 0280 QF/P	/	0280 PF	OOM 0280 PF/M	/	0280 HF	OOM 0280 HF/S	/	0280 CF	OOM 0280 CF/A
	/	0350 QF	OOM 0350 QF/P	/	0350 PF	OOM 0350 PF/M	/	0350 HF	OOM 0350 HF/S	/	0350 CF	OOM 0350 CF/A
/	0440 QF	OOM 0440 QF/P	/	0440 PF	OOM 0440 PF/M	/	0440 HF	OOM 0440 HF/S	/	0440 CF	OOM 0440 CF/A	

* Valid if "S" filter cartridge is installed upstream.



OMEGA
AIR

ALTERNATIVE
FILTER ELEMENTS

ORION (new)

ORION (new) Plastic end caps	DSF	LSF	MSF	KSF	
	Particle retention	3 µm	1 µm	0,01 µm	activated carbon
	Solids - q. class (ISO 8573-1)	6	3	1	1*
	Oils -q. class (ISO 8573-1)	-	-	1	1
Filter media	acrylic fibres, cellulose		borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65		1,5 to 65		1,5 to 45
Diff. pressure (new) [mbar]	10		80		60

	DSF		LSF		MSF		KSF	
	ORION	OMEGA AIR	ORION	OMEGA AIR	ORION	OMEGA AIR	ORION	OMEGA AIR
	DSF 75	OOR 75 DSF/P	LSF 75	OOR 75 LSF/R	MSF 75	OOR 75 MSF/S	KSF 75	OOR 75 KSF/A
	DSF 150	OOR 150 DSF/P	LSF 150	OOR 150 LSF/R	MSF 150	OOR 150 MSF/S	KSF 150	OOR 150 KSF/A
	DSF 200	OOR 200 DSF/P	LSF 200	OOR 200 LSF/R	MSF 200	OOR 200 MSF/S	KSF 200	OOR 200 KSF/A
	DSF 250	OOR 250 DSF/P	LSF 250	OOR 250 LSF/R	MSF 250	OOR 250 MSF/S	KSF 250	OOR 250 KSF/A
	DSF 400	OOR 400 DSF/P	LSF 400	OOR 400 LSF/R	MSF 400	OOR 400 MSF/S	KSF 400	OOR 400 KSF/A
	DSF 700	OOR 700 DSF/P	LSF 700	OOR 700 LSF/R	MSF 700	OOR 700 MSF/S	KSF 700	OOR 700 KSF/A
	DSF 1000	OOR 1000 DSF/P	LSF 1000	OOR 1000 LSF/R	MSF 1000	OOR 1000 MSF/S	KSF 1000	OOR 1000 KSF/A
	DSF 1300	OOR 1300 DSF/P	LSF 1300	OOR 1300 LSF/R	MSF 1300	OOR 1300 MSF/S	KSF 1300	OOR 1300 KSF/A
	DSF 2000	OOR 2000 DSF/P	LSF 2000	OOR 2000 LSF/R	MSF 2000	OOR 2000 MSF/S	KSF 2000	OOR 2000 KSF/A

* Valid if "S" filter cartridge is installed upstream.



ORION (new)

	DSF	LSF	MSF	KSF
ORION (new) Aluminium end caps				
Particle retention	3 µm	1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	3	1	1*
Oils -q. class (ISO 8573-1)	-	-	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	20	80	60

	DSF		LSF		MSF		KSF	
	ORION	OMEGA AIR	ORION	OMEGA AIR	ORION	OMEGA AIR	ORION	OMEGA AIR
	DSF 75	OOR 75 DSF/P AL	LSF 75	OOR 75 LSF/R AL	MSF 75	OOR 75 MSF/S AL	KSF 75	OOR 75 KSF/A AL
	DSF 150	OOR 150 DSF/P AL	LSF 150	OOR 150 LSF/R AL	MSF 150	OOR 150 MSF/S AL	KSF 150	OOR 150 KSF/A AL
	DSF 200	OOR 200 DSF/P AL	LSF 200	OOR 200 LSF/R AL	MSF 200	OOR 200 MSF/S AL	KSF 200	OOR 200 KSF/A AL
	DSF 250	OOR 250 DSF/P AL	LSF 250	OOR 250 LSF/R AL	MSF 250	OOR 250 MSF/S AL	KSF 250	OOR 250 KSF/A AL
	DSF 400	OOR 400 DSF/P AL	LSF 400	OOR 400 LSF/R AL	MSF 400	OOR 400 MSF/S AL	KSF 400	OOR 400 KSF/A AL
	DSF 700	OOR 700 DSF/P AL	LSF 700	OOR 700 LSF/R AL	MSF 700	OOR 700 MSF/S AL	KSF 700	OOR 700 KSF/A AL
	DSF 1000	OOR 1000 DSF/P AL	LSF 1000	OOR 1000 LSF/R AL	MSF 1000	OOR 1000 MSF/S AL	KSF 1000	OOR 1000 KSF/A AL
	DSF 1300	OOR 1300 DSF/P AL	LSF 1300	OOR 1300 LSF/R AL	MSF 1300	OOR 1300 MSF/S AL	KSF 1300	OOR 1300 KSF/A AL
	DSF 2000	OOR 2000 DSF/P AL	LSF 2000	OOR 2000 LSF/R AL	MSF 2000	OOR 2000 MSF/S AL	KSF 2000	OOR 2000 KSF/A AL

* Valid if "S" filter cartridge is installed upstream.



OMEGA
AIR

ALTERNATIVE
FILTER ELEMENTS

ORION F (previous)

ORION F (previous) Aluminium end caps	OLF	OMF	OKF
Particle retention	3 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	1	1*
Oils - q. class (ISO 8573-1)	-	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres	activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	80	60

	OLF		OMF		OKF	
	ORION	OMEGA AIR	ORION	OMEGA AIR	ORION	OMEGA AIR
	OLF-75-B	OOR F 75 OLF/P AI	OMF-75-B	OOR F75 OMF/S AI	OKF-75-B	OOR F75 OKF/A AI
	OLF-150-B	OOR F150 OLF/P AI	OMF-150-B	OOR F150 OMF/S AI	OKF-150-B	OOR F150 OKF/A AI
	OLF-200-C	OOR F200 OLF/P AI	OMF-200-C	OOR F200 OMF/S AI	OKF-200-C	OOR F200 OKF/A AI
	OLF-400-C	OOR F400 OLF/P AI	OMF-400-C	OOR F400 OMF/S AI	OKF-400-C	OOR F400 OKF/A AI
	OLF-700-C	OOR F700 OLF/P AI	OMF-700-C	OOR F700 OMF/S AI	OKF-700-C	OOR F700 OKF/A AI
	OLF-1000-C	OOR F1000 OLF/P AI	OMF-1000-C	OOR F1000 OMF/S AI	OKF-1000-C	OOR F1000 OKF/A AI
	OLF-1500-C	OOR F1500 OLF/P AI	OMF-1500-C	OOR F1500 OMF/S AI	OKF-1500-C	OOR F1500 OKF/A AI

* Valid if "S" filter cartridge is installed upstream.

 **OMEGA**
AIR

ALTERNATIVE FILTER ELEMENTS

PNEUMATECH (new)

	P	G	C	V
PNEUMATECH (new) Plastic end caps				
Particle retention	1 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	3	2	1	1*
Oils -q. class (ISO 8573-1)	-	2	1	1
Filter media	borosilicate micro fibres			activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	20	50	80	60

	P		G		C		V	
	PNEUMATECH	OMEGA AIR	PNEUMATECH	OMEGA AIR	PNEUMATECH	OMEGA AIR	PNEUMATECH	OMEGA AIR
1 P	OPT 1 P/R		1 G	OPT 1 G/M	1 C	OPT 1 C/S	1 V	OPT 1 V/A
2 P	OPT 2 P/R		2 G	OPT 2 G/M	2 C	OPT 2 C/S	2 V	OPT 2 V/A
3 P	OPT 3 P/R		3 G	OPT 3 G/M	3 C	OPT 3 C/S	3 V	OPT 3 V/A
4 P	OPT 4 P/R		4 G	OPT 4 G/M	4 C	OPT 4 C/S	4 V	OPT 4 V/A
5 P	OPT 5 P/R		5 G	OPT 5 G/M	5 C	OPT 5 C/S	5 V	OPT 5 V/A
6 P	OPT 6 P/R		6 G	OPT 6 G/M	6 C	OPT 6 C/S	6 V	OPT 6 V/A
7 P	OPT 7 P/R		7 G	OPT 7 G/M	7 C	OPT 7 C/S	7 V	OPT 7 V/A
8 P	OPT 8 P/R		8 G	OPT 8 G/M	8 C	OPT 8 C/S	8 V	OPT 8 V/A
9 P	OPT 9 P/R		9 G	OPT 9 G/M	9 C	OPT 9 C/S	9 V	OPT 9 V/A
10 P	OPT 10 P/R		10 G	OPT 10 G/M	10 C	OPT 10 C/S	10 V	OPT 10 V/A
11 P	OPT 11 P/R		11 G	OPT 11 G/M	11 C	OPT 11 C/S	11 V	OPT 11 V/A

* Valid if "S" filter cartridge is installed upstream.


OMEGA
AIR
**ALTERNATIVE
 FILTER ELEMENTS**

PNEUMATECH (old)

	MBP	MBM	MBS	MBA
PNEUMATECH (old) Plastic end caps				
Particle retention	3 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	2	1	1*
Oils -q. class (ISO 8573-1)	-	2	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	50	80	60

	MBP		MBM		MBS		MBA	
	PNEUMATECH	OMEGA AIR	PNEUMATECH	OMEGA AIR	PNEUMATECH	OMEGA AIR	PNEUMATECH	OMEGA AIR
	MBP 35	OPT 35 MBP/P	MBM 35	OPT 35 MBM/M	MBS 35	OPT 35 MBS/S	MBA 35	OPT 35 MBA/A
	MBP 50	OPT 50 MBP/P	MBM 50	OPT 50 MBM/M	MBS 50	OPT 50 MBS/S	MBA 50	OPT 50 MBA/A
	MBP 75	OPT 75 MBP/P	MBM 75	OPT 75 MBM/M	MBS 75	OPT 75 MBS/S	MBA 75	OPT 75 MBA/A
	MBP 120	OPT 120 MBP/P	MBM 120	OPT 120 MBM/M	MBS 120	OPT 120 MBS/S	MBA 120	OPT 120 MBA/A
	MBP 200	OPT 200 MBP/P	MBM 200	OPT 200 MBM/M	MBS 200	OPT 200 MBS/S	MBA 200	OPT 200 MBA/A
	MBP 300	OPT 300 MBP/P	MBM 300	OPT 300 MBM/M	MBS 300	OPT 300 MBS/S	MBA 300	OPT 300 MBA/A
	MBP 460	OPT 460 MBP/P	MBM 460	OPT 460 MBM/M	MBS 460	OPT 460 MBS/S	MBA 460	OPT 460 MBA/A
	MBP 600	OPT 600 MBP/P	MBM 600	OPT 600 MBM/M	MBS 600	OPT 600 MBS/S	MBA 600	OPT 600 MBA/A
	MBP 900	OPT 900 MBP/P	MBM 900	OPT 900 MBM/M	MBS 900	OPT 900 MBS/S	MBA 900	OPT 900 MBA/A
	MBP 1250	OPT 1250 MBP/P	MBM 1250	OPT 1250 MBM/M	MBS 1250	OPT 1250 MBS/S	MBA 1250	OPT 1250 MBA/A
	MBP 1500	OPT 1500 MBP/P	MBM 1500	OPT 1500 MBM/M	MBS 1500	OPT 1500 MBS/S	MBA 1500	OPT 1500 MBA/A

* Valid if "S" filter cartridge is installed upstream.



PREVOST MICRO

	M	B	C
PREVOST MICRO Plastic end caps			
Particle retention	1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	3	1	1*
Oils -q. class (ISO 8573-1)	-	1	1
Filter media	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	20	80	60

	M		B		C	
	PREVOST	OMEGA AIR	PREVOST	OMEGA AIR	PREVOST	OMEGA AIR
101-MFMC		OPR A101 M/R	201-MFBC	OPR A201 B/S	301-MFCC	OPR A301 C/A
102-MFMC		OPR A102 M/R	202-MFBC	OPR A202 B/S	302-MFCC	OPR A302 C/A
103-MFMC		OPR A103 M/R	203-MFBC	OPR A203 B/S	303-MFCC	OPR A303 C/A
104-MFMC		OPR A104 M/R	204-MFBC	OPR A204 B/S	304-MFCC	OPR A304 C/A
105-MFMC		OPR A105 M/R	205-MFBC	OPR A205 B/S	305-MFCC	OPR A305 C/A
106-MFMC		OPR A106 M/R	206-MFBC	OPR A206 B/S	306-MFCC	OPR A306 C/A
107-MFMC		OPR A107 M/R	207-MFBC	OPR A207 B/S	307-MFCC	OPR A307 C/A
108-MFMC		OPR A108 M/R	208-MFBC	OPR A208 B/S	308-MFCC	OPR A308 C/A
109-MFMC		OPR A109 M/R	209-MFBC	OPR A209 B/S	309-MFCC	OPR A309 C/A
110-MFMC		OPR A110 M/R	210-MFBC	OPR A210 B/S	310-MFCC	OPR A310 C/A
111-MFMC		OPR A111 M/R	211-MFBC	OPR A211 B/S	311-MFCC	OPR A311 C/A
112-MFMC		OPR A112 M/R	212-MFBC	OPR A212 B/S	312-MFCC	OPR A312 C/A
113-MFMC		OPR A113 M/R	213-MFBC	OPR A213 B/S	313-MFCC	OPR A313 C/A
114-MFMC		OPR A114 M/R	214-MFBC	OPR A214 B/S	314-MFCC	OPR A314 C/A

* Valid if "S" filter cartridge is installed upstream.



OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

PREVOST

	M	S	C
PREVOST Aluminium end caps			
Particle retention	1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	3	1	1*
Oils -q. class (ISO 8573-1)	-	1	1
Filter media	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	20	80	60

	M		S		C	
	PREVOST	OMEGA AIR	PREVOST	OMEGA AIR	PREVOST	OMEGA AIR
MCAM 101	OPR 101 M/R AL		MCAM 201	OPR 201 S/S AL	MCAM 301	OPR 301 C/A AL
MCAM 102	OPR 102 M/R AL		MCAM 202	OPR 202 S/S AL	MCAM 302	OPR 302 C/A AL
MCAM 103	OPR 103 M/R AL		MCAM 203	OPR 203 S/S AL	MCAM 303	OPR 303 C/A AL
MCAM 104	OPR 104 M/R AL		MCAM 204	OPR 204 S/S AL	MCAM 304	OPR 304 C/A AL
MCAM 105	OPR 105 M/R AL		MCAM 205	OPR 205 S/S AL	MCAM 305	OPR 305 C/A AL
MCAM 106	OPR 106 M/R AL		MCAM 206	OPR 206 S/S AL	MCAM 306	OPR 306 C/A AL
MCAM 107	OPR 107 M/R AL		MCAM 207	OPR 207 S/S AL	MCAM 307	OPR 307 C/A AL
MCAM 108	OPR 108 M/R AL		MCAM 208	OPR 208 S/S AL	MCAM 308	OPR 308 C/A AL
MCAM 109	OPR 109 M/R AL		MCAM 209	OPR 209 S/S AL	MCAM 309	OPR 309 C/A AL
MCAM 110	OPR 110 M/R AL		MCAM 210	OPR 210 S/S AL	MCAM 310	OPR 310 C/A AL
MCAM 111	OPR 111 M/R AL		MCAM 211	OPR 211 S/S AL	MCAM 311	OPR 311 C/A AL

* Valid if "S" filter cartridge is installed upstream.



PUSKA [new]

	P	G	C	V
PUSKA Plastic end caps				
Particle retention	3 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	2	1	1*
Oils -q. class (ISO 8573-1)	-	2	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	50	80	60

	P		G		C		V	
	PUSKA	OMEGA AIR	PUSKA	OMEGA AIR	PUSKA	OMEGA AIR	PUSKA	OMEGA AIR
	P 7	OPU 7 P/R	G 7	OPU 7 G/M	C 7	OPU 7 C/S	V 7	OPU 7 V/A
	P 15	OPU 15 P/R	G 15	OPU 15 G/M	C 15	OPU 15 C/S	V 15	OPU 15 V/A
	P 21	OPU 21 P/R	G 21	OPU 21 G/M	C 21	OPU 21 C/S	V 21	OPU 21 V/A
	P 30	OPU 30 P/R	G 30	OPU 30 G/M	C 30	OPU 30 C/S	V 30	OPU 30 V/A
	P 48	OPU 48 P/R	G 48	OPU 48 G/M	C 48	OPU 48 C/S	V 48	OPU 48 V/A
	P 84	OPU 84 P/R	G 84	OPU 84 G/M	C 84	OPU 84 C/S	V 84	OPU 84 V/A
	P 114	OPU 114 P/R	G 114	OPU 114 G/M	C 114	OPU 114 C/S	V 114	OPU 114 V/A
	P 156	OPU 156 P/R	G 156	OPU 156 G/M	C 156	OPU 156 C/S	V 156	OPU 156 V/A
	P 216	OPU 216 P/R	G 216	OPU 216 G/M	C 216	OPU 216 C/S	V 216	OPU 216 V/A
	P 315	OPU 315 P/R	G 315	OPU 315 G/M	C 315	OPU 315 C/S	V 315	OPU 315 V/A
	P 405	OPU 405 P/R	G 405	OPU 405 G/M	C 405	OPU 405 C/S	V 405	OPU 405 V/A

* Valid if "S" filter cartridge is installed upstream.


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

PUSKA (old)

	MBP	MBM	MBS	MBA
PUSKA Plastic end caps				
Particle retention	3 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	2	1	1*
Oils -q. class (ISO 8573-1)	-	2	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	50	80	60

	MBP		MBM		MBS		MBA	
	PUSKA	OMEGA AIR	PUSKA	OMEGA AIR	PUSKA	OMEGA AIR	PUSKA	OMEGA AIR
MBP 10		OPU 10 MBP/P	MBM 10	OPU 10 MBM/M	MBS 10	OPU 10 MBS/S	MBA 10	OPU 10 MBA/A
MBP 13		OPU 13 MBP/P	MBM 13	OPU 13 MBM/M	MBS 13	OPU 13 MBS/S	MBA 13	OPU 13 MBA/A
MBP 20		OPU 20 MBP/P	MBM 20	OPU 20 MBM/M	MBS 20	OPU 20 MBS/S	MBA 20	OPU 20 MBA/A
MBP 33		OPU 33 MBP/P	MBM 33	OPU 33 MBM/M	MBS 33	OPU 33 MBS/S	MBA 33	OPU 33 MBA/A
MBP 60		OPU 60 MBP/P	MBM 60	OPU 60 MBM/M	MBS 60	OPU 60 MBS/S	MBA 60	OPU 60 MBA/A
MBP 85		OPU 85 MBP/P	MBM 85	OPU 85 MBM/M	MBS 85	OPU 85 MBS/S	MBA 85	OPU 85 MBA/A
MBP 130		OPU 130 MBP/P	MBM 130	OPU 130 MBM/M	MBS 130	OPU 130 MBS/S	MBA 130	OPU 130 MBA/A
MBP 170		OPU 170 MBP/P	MBM 170	OPU 170 MBM/M	MBS 170	OPU 170 MBS/S	MBA 170	OPU 170 MBA/A
MBP 250		OPU 250 MBP/P	MBM 250	OPU 250 MBM/M	MBS 250	OPU 250 MBS/S	MBA 250	OPU 250 MBA/A
MBP 400		OPU 400 MBP/P	MBM 400	OPU 400 MBM/M	MBS 400	OPU 400 MBS/S	MBA 400	OPU 400 MBA/A

* Valid if "S" filter cartridge is installed upstream.



SCHNEIDER

SCHNEIDER Plastic end caps	VP	FP	AP
			
Particle retention	3 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	1	1*
Oils -q. class (ISO 8573-1)	-	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres	activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	80	60

	VP		FP		AP	
	SCHNEIDER	OMEGA AIR	SCHNEIDER	OMEGA AIR	SCHNEIDER	OMEGA AIR
	F-VP 6	OSC 6 VP/P	F-FP 6	OSC 6 FP/S	F-AP 6	OSC 6 AP/A
	F-VP 10	OSC 10 VP/P	F-FP 10	OSC 10 FP/S	F-AP 10	OSC 10 AP/A
	F-VP 15	OSC 15 VP/P	F-FP 15	OSC 15 FP/S	F-AP 15	OSC 15 AP/A
	F-VP 30	OSC 30 VP/P	F-FP 30	OSC 30 FP/S	F-AP 30	OSC 30 AP/A
	F-VP 45	OSC 45 VP/P	F-FP 45	OSC 45 FP/S	F-AP 45	OSC 45 AP/A
	F-VP 80	OSC 80 VP/P	F-FP 80	OSC 80 FP/S	F-AP 80	OSC 80 AP/A
	F-VP 160	OSC 160 VP/P	F-FP 160	OSC 160 FP/S	F-AP 160	OSC 160 AP/A

* Valid if "S" filter cartridge is installed upstream.



OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

SMC

	AFF	AM	AMD	AMF
SMC Plastic end caps				
Particle retention	3 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	2	1	1*
Oils - q. class (ISO 8573-1)	-	2	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	50	80	60

	AFF		AM		AMD		AMF	
	SMC	OMEGA AIR	SMC	OMEGA AIR	SMC	OMEGA AIR	SMC	OMEGA AIR
	AFF-EL2B	OSMC 150 AFF/P	AM-EL150	OSMC 150 AM/M	AMD-EL150	OSMC 150 AMD/S	AMF-EL150	OSMC 150 AMF/A
	AFF-EL4B	OSMC 250 AFF/P	AM-EL250	OSMC 250 AM/M	AMD-EL250	OSMC 250 AMD/S	AMF-EL250	OSMC 250 AMF/A
	AFF-EL8B	OSMC 350 AFF/P	AM-EL350	OSMC 350 AM/M	AMD-EL350	OSMC 350 AMD/S	AMF-EL350	OSMC 350 AMF/A
	AFF-EL11B	OSMC 450 AFF/P	AM-EL450	OSMC 450 AM/M	AMD-EL450	OSMC 450 AMD/S	AMF-EL450	OSMC 450 AMF/A
	AFF-EL22B	OSMC 550 AFF/P	AM-EL550	OSMC 550 AM/M	AMD-EL550	OSMC 550 AMD/S	AMF-EL550	OSMC 550 AMF/A

* Valid if "S" filter cartridge is installed upstream.



ALTERNATIVE FILTER ELEMENTS

SMC

	AFF	AM	AMD	AMF
SMC Aluminium end caps				
Particle retention	3 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	2	1	1*
Oils -q. class (ISO 8573-1)	-	2	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	50	80	60

	AFF		AM		AMD		AMF	
	SMC	OMEGA AIR	SMC	OMEGA AIR	SMC	OMEGA AIR	SMC	OMEGA AIR
	AFF-EL2B	OSMC 150 AFF/P AL	AM-EL150	OSMC 150 AM/M AL	AMD-EL150	OSMC 150 AMD/S AL	AMF-EL150	OSMC 150 AMF/A AL
	AFF-EL4B	OSMC 250 AFF/P AL	AM-EL250	OSMC 250 AM/M AL	AMD-EL250	OSMC 250 AMD/S AL	AMF-EL250	OSMC 250 AMF/A AL
	AFF-EL8B	OSMC 350 AFF/P AL	AM-EL350	OSMC 350 AM/M AL	AMD-EL350	OSMC 350 AMD/S AL	AMF-EL350	OSMC 350 AMF/A AL
	AFF-EL11B	OSMC 450 AFF/P AL	AM-EL450	OSMC 450 AM/M AL	AMD-EL450	OSMC 450 AMD/S AL	AMF-EL450	OSMC 450 AMF/A AL
	AFF-EL22B	OSMC 550 AFF/P AL	AM-EL550	OSMC 550 AM/M AL	AMD-EL550	OSMC 550 AMD/S AL	AMF-EL550	OSMC 550 AMF/A AL
	AFF-EL37B	OSMC 650 AFF/P AL	AM-EL650	OSMC 650 AM/M AL	AMD-EL650	OSMC 650 AMD/S AL	AMF-EL650	OSMC 650 AMF/A AL
	AFF-EL75B	OSMC 850 AFF/P AL	AM-EL850	OSMC 850 AM/M AL	AMD-EL850	OSMC 850 AMD/S AL	AMF-EL850	OSMC 850 AMF/A AL

* Valid if "S" filter cartridge is installed upstream.


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

SPX NGF

	SF	PF	HF	CF
SPX NGF Plastic end caps				
Particle retention	3 µm	1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	3	1	1*
Oils - q. class (ISO 8573-1)	-	-	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	20	80	60

	SF		PF		HF		CF	
	SPX	OMEGA AIR	SPX	OMEGA AIR	SPX	OMEGA AIR	SPX	OMEGA AIR
	02-SF	OSP 02 SF/P	02-PF	OSP 02 PF/R	02-HF	OSP 02 HF/S	02-CF	OSP 02 CF/A
	03-SF	OSP 03 SF/P	03-PF	OSP 03 PF/R	03-HF	OSP 03 HF/S	03-CF	OSP 03 CF/A
	04-SF	OSP 04 SF/P	04-PF	OSP 04 PF/R	04-HF	OSP 04 HF/S	04-CF	OSP 04 CF/A
	06-SF	OSP 06 SF/P	06-PF	OSP 06 PF/R	06-HF	OSP 06 HF/S	06-CF	OSP 06 CF/A
	07-SF	OSP 07 SF/P	07-PF	OSP 07 PF/R	07-HF	OSP 07 HF/S	07-CF	OSP 07 CF/A
	08-SF	OSP 08 SF/P	08-PF	OSP 08 PF/R	08-HF	OSP 08 HF/S	08-CF	OSP 08 CF/A
	10-SF	OSP 10 SF/P	10-PF	OSP 10 PF/R	10-HF	OSP 10 HF/S	10-CF	OSP 10 CF/A
	11-SF	OSP 11 SF/P	11-PF	OSP 11 PF/R	11-HF	OSP 11 HF/S	11-CF	OSP 11 CF/A
	12-SF	OSP 12 SF/P	12-PF	OSP 12 PF/R	12-HF	OSP 12 HF/S	12-CF	OSP 12 CF/A
	13-SF	OSP 13 SF/P	13-PF	OSP 13 PF/R	13-HF	OSP 13 HF/S	13-CF	OSP 13 CF/A
	14-SF	OSP 14 SF/P	14-PF	OSP 14 PF/R	14-HF	OSP 14 HF/S	14-CF	OSP 14 CF/A
	15-SF	OSP 15 SF/P	15-PF	OSP 15 PF/R	15-HF	OSP 15 HF/S	15-CF	OSP 15 CF/A
	16-SF	OSP 16 SF/P	16-PF	OSP 16 PF/R	16-HF	OSP 16 HF/S	16-CF	OSP 16 CF/A
	17-SF	OSP 17 SF/P	17-PF	OSP 17 PF/R	17-HF	OSP 17 HF/S	17-CF	OSP 17 CF/A



ALTERNATIVE FILTER ELEMENTS

SULLAIR

SULLAIR Plastic end caps	SCF	SCH	SCC
			
Particle retention	1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	3	1	1*
Oils - q. class (ISO 8573-1)	-	1	1
Filter media	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	20	80	60

	SCF		SCH		SCC	
	SULLAIR	OMEGA AIR	SULLAIR	OMEGA AIR	SULLAIR	OMEGA AIR
20 SCF		20 SCF/R	20 SCH	20 SCH/S	20 SCC	20 SCC/A
40 SCF		40 SCF/R	40 SCH	40 SCH/S	40 SCC	40 SCC/A
65 SCF		65 SCF/R	65 SCH	65 SCH/S	65 SCC	65 SCC/A
125 SCF		125 SCF/R	125 SCH	125 SCH/S	125 SCC	125 SCC/A
235 SCF		235 SCF/R	235 SCH	235 SCH/S	235 SCC	235 SCC/A
340 SCF		340 SCF/R	340 SCH	340 SCH/S	340 SCC	340 SCC/A
465 SCF		465 SCF/R	465 SCH	465 SCH/S	465 SCC	465 SCC/A
700 SCF		700 SCF/R	700 SCH	700 SCH/S	700 SCC	700 SCC/A
910 SCF		910 SCF/R	910 SCH	910 SCH/S	910 SCC	910 SCC/A
1315 SCF		1315 SCF/R	1315 SCH	1315 SCH/S	1315 SCC	1315 SCC/A
2120 SCF		2120 SCF/R	2120 SCH	2120 SCH/S	2120 SCC	2120 SCC/A

* Valid if "S" filter cartridge is installed upstream.


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

WALKER OWA Alfa

	X5	X1	XA	AC
WALKER OWA Alfa Plastic end caps				
Particle retention	3 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	2	1	1*
Oils -q. class (ISO 8573-1)	-	2	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	50	80	60

	X5		X1		XA		AC	
	WALKER	OMEGA AIR	WALKER	OMEGA AIR	WALKER	OMEGA AIR	WALKER	OMEGA AIR
E0304 X5		OWA AE0304 X5/P	E0304 X1	OWA AE0304 X1/M	E0304 XA	OWA AE0304 XA/S	E0304 AC	OWA AE0304 AC/A
E0305 X5		OWA AE0305 X5/P	E0305 X1	OWA AE0305 X1/M	E0305 XA	OWA AE0305 XA/S	E0305 AC	OWA AE0305 AC/A
E0406 X5		OWA AE0406 X5/P	E0406 X1	OWA AE0406 X1/M	E0406 XA	OWA AE0406 XA/S	E0406 AC	OWA AE0406 AC/A
E0407 X5		OWA AE0407 X5/P	E0407 X1	OWA AE0407 X1/M	E0407 XA	OWA AE0407 XA/S	E0407 AC	OWA AE0407 AC/A
E0413 X5		OWA AE0413 X5/P	E0413 X1	OWA AE0413 X1/M	E0413 XA	OWA AE0413 XA/S	E0413 AC	OWA AE0413 AC/A
E0613 X5		OWA AE0613 X5/P	E0613 X1	OWA AE0613 X1/M	E0613 XA	OWA AE0613 XA/S	E0613 AC	OWA AE 0613 AC/A
E0620 X5		OWA AE0620 X5/P	E0620 X1	OWA AE0620 X1/M	E0620 XA	OWA AE0620 XA/S	E0620 AC	OWA AE 0620 AC/A
E0625 X5		OWA AE0625 X5/P	E0625 X1	OWA AE0625 X1/M	E0625 XA	OWA AE0625 XA/S	E0625 AC	OWA AE 0625 AC/A
E0730 X5		OWA AE0730 X5/P	E0730 X1	OWA AE0730 X1/M	E0730 XA	OWA AE0730 XA/S	E0730 AC	OWA AE 0730 AC/A
E0830 X5		OWA AE0830 X5/P	E0830 X1	OWA AE0830 X1/M	E0830 XA	OWA AE0830 XA/S	E0830 AC	OWA AE 0830 AC/A
E0860 X5		OWA AE0860 X5/P	E0860 X1	OWA AE0860 X1/M	E0860 XA	OWA AE0860 XA/S	E0860 AC	OWA AE 0860 AC/A
E1140 X5		OWA AE1140 X5/P	E1140 X1	OWA AE1140 X1/M	E1140 XA	OWA AE1140 XA/S	E1140 AC	OWA AE 1140 AC/A
E1160 X5		OWA AE1160 X5/P	E1160 X1	OWA AE1160 X1/M	E1160 XA	OWA AE1160 XA/S	E1160 AC	OWA AE 1160 AC/A
E1175 X5		OWA AE1175 X5/P	E1175 X1	OWA AE1175 X1/M	E1175 XA	OWA AE1175 XA/S	E1175 AC	OWA AE 1175 AC/A

* Valid if "S" filter cartridge is installed upstream.



ALTERNATIVE FILTER ELEMENTS

WALKER OWA 20HP & 50HP

	X5	X1	XA	AC
WALKER OWA Alfa Aluminium end caps				
Particle retention	3 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	2	1	1*
Oils - q. class (ISO 8573-1)	-	2	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	50	80	60

	X5		X1		XA		AC	
	WALKER	OMEGA AIR	WALKER	OMEGA AIR	WALKER	OMEGA AIR	WALKER	OMEGA AIR
E1003 X5		OWA E1003 X5/P AI	E1003 X1	OWA E1003 X1/M AI	E1003 XA	OWA E1003 XA/S AI	E1003 AC	OWA E1003 AC/A AI
E1503 X5		OWA E1503 X5/P AI	E1503 X1	OWA E1503 X1/M AI	E1503 XA	OWA E1503 XA/S AI	E1503 AC	OWA E1503 AC/A AI
E2005 X5		OWA E2005 X5/P AI	E2005 X1	OWA E2005 X1/M AI	E2005 XA	OWA E2005 XA/S AI	E2005 AC	OWA E2005 AC/A AI
E2505 X5		OWA E2505 X5/P AI	E2505 X1	OWA E2505 X1/M AI	E2505 XA	OWA E2505 XA/S AI	E2505 AC	OWA E2505 AC/A AI
E2008 X5		OWA E2008 X5/P AI	E2008 X1	OWA E2008 X1/M AI	E2008 XA	OWA E2008 XA/S AI	E2008 AC	OWA E2008 AC/A AI
E2508 X5		OWA E2508 X5/P AI	E2508 X1	OWA E2508 X1/M AI	E2508 XA	OWA E2508 XA/S AI	E2508 AC	OWA E2508 AC/A AI
E2512 X5		OWA E2512 X5/P AI	E2512 X1	OWA E2512 X1/M AI	E2512 XA	OWA E2512 XA/S AI	E2512 AC	OWA E2512 AC/A AI
E2712 X5		OWA E2712 X5/P AI	E2712 X1	OWA E2712 X1/M AI	E2712 XA	OWA E2712 XA/S AI	E2712 AC	OWA E2712 AC/A AI
E3012 X5		OWA E3012 X5/P AI	E3012 X1	OWA E3012 X1/M AI	E3012 XA	OWA E3012 XA/S AI	E3012 AC	OWA E3012 AC/A AI
E3020 X5		OWA E3020 X5/P AI	E3020 X1	OWA E3020 X1/M AI	E3020 XA	OWA E3020 XA/S AI	E3020 AC	OWA E3020 AC/A AI
E5020 X5		OWA E5020 X5/P AI	E5020 X1	OWA E5020 X1/M AI	E5020 XA	OWA E5020 XA/S AI	E5020 AC	OWA E5020 AC/A AI
E5024 X5		OWA E5024 X5/P AI	E5024 X1	OWA E5024 X1/M AI	E5024 XA	OWA E5024 XA/S AI	E5024 AC	OWA E5024 AC/A AI
E5030 X5		OWA E5030 X5/P AI	E5030 X1	OWA E5030 X1/M AI	E5030 XA	OWA E5030 XA/S AI	E5030 AC	OWA E5030 AC/A AI
HP1535 X5		OWA HP1535 X5/P AI	HP1535 X1	OWA HP1535 X1/M AI	HP1535 XA	OWA HP1535 XA/S AI	HP1535 AC	OWA HP1535 AC/A AI
HP1550 X5		OWA HP1550 X5/P AI	HP1550 X1	OWA HP1550 X1/M AI	HP1550 XA	OWA HP1550 XA/S AI	HP1550 AC	OWA HP1550 AC/A AI
HP2040 X5		OWA HP2040 X5/P AI	HP2040 X1	OWA HP2040 X1/M AI	HP2040 XA	OWA HP2040 XA/S AI	HP2040 AC	OWA HP2040 AC/A AI
HP2540 X5		OWA HP2540 X5/P AI	HP2540 X1	OWA HP2540 X1/M AI	HP2540 XA	OWA HP2540 XA/S AI	HP2540 AC	OWA HP2540 AC/A AI
HP2080 X5		OWA HP2080 X5/P AI	HP2080 X1	OWA HP2080 X1/M AI	HP2080 XA	OWA HP2080 XA/S AI	HP2080 AC	OWA HP2080 AC/A AI
HP2580 X5		OWA HP2580 X5/P AI	HP2580 X1	OWA HP2580 X1/M AI	HP2580 XA	OWA HP2580 XA/S AI	HP2580 AC	OWA HP2580 AC/A AI
HP2512 X5		OWA HP2512 X5/P AI	HP2512 X1	OWA HP2512 X1/M AI	HP2512 XA	OWA HP2512 XA/S AI	HP2512 AC	OWA HP2512 AC/A AI
HP2520 X5		OWA HP2520 X5/P AI	HP2520 X1	OWA HP2520 X1/M AI	HP2520 XA	OWA HP2520 XA/S AI	HP2520 AC	OWA HP2520 AC/A AI

* Valid if "S" filter cartridge is installed upstream.


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

WALKER

	X5	X1	XA	AC	MV
WALKER Aluminium end caps					
Particle retention	3 µm	0,1 µm	0,01 µm	activated carbon	medical vacuum
Solids - q. class (ISO 8573-1)	6	2	1	1*	-
Oils - q. class (ISO 8573-1)	-	2	1	1	-
Filter media	acrylic fibres, cellulose	borosilicate micro fibres		activated carbon	-
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45	1,5 to 65
Diff. pressure (new) [mbar]	10	50	80	60	-

	X5		X1		XA		AC		MV	
	WALKER	OMEGA AIR	WALKER	OMEGA AIR	WALKER	OMEGA AIR	WALKER	OMEGA AIR	WALKER	OMEGA AIR
	E361-X5	OWA E361 X5/P AL	E361-X1	OWA E361 X1/M AL	E361-XA	OWA E361 XA/S AL	E361-AC	OWA E361 AC/A AL	E511 MV	OWA E511 MV/M-VAC AL
	E371-X5	OWA E371 X5/P AL	E371-X1	OWA E371 X1/M AL	E371-XA	OWA E371 XA/S AL	E381-AC	OWA E381 AC/A AL	E521 MV	OWA E521 MV/M-VAC AL
	-	-	-	-	-	-	E371-AC	OWA E371 AC/A AL	E811 MV	OWA E811 MV/M-VAC AL
	E511-X5	OWA E511 X5/P AL	E511-X1	OWA E511 X1/M AL	E511-XA	OWA E511 XA/S AL	E511-AC	OWA E511 AC/A AL	E821 MV	OWA E821 MV/M-VAC AL
	E711-X5	OWA E711 X5/P AL	E711-X1	OWA E711 X1/M AL	E711-XA	OWA E711 XA/S AL	E711-AC	OWA E711 AC/A AL	E831 MV	OWA E831 MV/M-VAC AL
	E811-X5	OWA E811 X5/P AL	E811-X1	OWA E811 X1/M AL	E811-XA	OWA E811 XA/S AL	E811-AC	OWA E811 AC/A AL	E851 MV	OWA E851 MV/M-VAC AL
	E731-X5	OWA E731 X5/P AL	E731-X1	OWA E731 X1/M AL	E731-XA	OWA E731 XA/S AL	E731-AC	OWA E731 AC/A AL	E1261 MV	OWA E1261 MV/M-VAC AL
	E821-X5	OWA E821 X5/P AL	E821-X1	OWA E821 X1/M AL	E821-XA	OWA E821 XA/S AL	E821-AC	OWA E821 AC/A AL	E1281 MV	OWA E1281 MV/M-VAC AL
	E831-X5	OWA E831 X5/P AL	E831-X1	OWA E831 X1/M AL	E831-XA	OWA E831 XA/S AL	E831-AC	OWA E831 AC/A AL	E139 MV	OWA E139 MV/M-VAC AL
	E851-X5	OWA E851 X5/P AL	E851-X1	OWA E851 X1/M AL	E851-XA	OWA E851 XA/S AL	E851-AC	OWA E851 AC/A AL	E88 MV	OWA E88 MV/M-VAC AL
	E1251-X5	OWA E1251 X5/P AL	E1251-X1	OWA E1251 X1/M AL	E1251-XA	OWA E1251 XA/S AL	E1251-AC	OWA E1251 AC/A AL		
	E1261-X5	OWA E1261 X5/P AL	E1261-X1	OWA E1261 X1/M AL	E1261-XA	OWA E1261 XA/S AL	E1261-AC	OWA E1261 AC/A AL		
	E1281-X5	OWA E1281 X5/P AL	E1281-X1	OWA E1281 X1/M AL	E1281-XA	OWA E1281 XA/S AL	E1281-AC	OWA E1281 AC/A AL		

* Valid if "S" filter cartridge is installed upstream.



WALKER HP

WALKER HP Aluminium end caps	X5	X1	XA	AC
				
Particle retention	3 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	2	1	1*
Oils - q. class (ISO 8573-1)	-	2	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	50	80	60

	X5		X1		XA		AC	
	WALKER	OMEGA AIR	WALKER	OMEGA AIR	WALKER	OMEGA AIR	WALKER	OMEGA AIR
E50-X5		OWA E50 X5/P AL	E50-X1	OWA E50 X1/M AL	E50-XA	OWA E50 XA/S AL	E50-AC	OWA E50 AC/A AL
E51-X5		OWA E51 X5/P AL	E51-X1	OWA E51 X1/M AL	E51-XA	OWA E51 XA/S AL	E51-AC	OWA E51 AC/A AL
E52-X5		OWA E52 X5/P AL	E52-X1	OWA E52 X1/M AL	E52-XA	OWA E52 XA/S AL	E52-AC	OWA E52 AC/A AL
E715-X5		OWA E715 X5/P AL	E715-X1	OWA E715 X1/M AL	E715-XA	OWA E715 XA/S AL	E715-AC	OWA E715 AC/A AL
E730-X5		OWA E730 X5/P AL	E730-X1	OWA E730 X1/M AL	E730-XA	OWA E730 XA/S AL	E730-AC	OWA E730 AC/A AL
E830-X5		OWA E830 X5/P AL	E830-X1	OWA E830 X1/M AL	E830-XA	OWA E830 XA/S AL	E830-AC	OWA E830 AC/A AL
E86-X5		OWA E86 X5/P AL	E86-X1	OWA E86 X1/M AL	E86-XA	OWA E86 XA/S AL	E86-AC	OWA E86 AC/A AL

* Valid if "S" filter cartridge is installed upstream.


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

WALKER 20HP & 50HP

WALKER 20HP & 50HP Aluminium end caps	X5	X1	XA	AC	
					
	Particle retention	3 µm	0,1 µm	0,01 µm	activated carbon
	Solids - q. class (ISO 8573-1)	6	2	1	1*
	Oils - q. class (ISO 8573-1)	-	2	1	1
	Filter media	acrylic fibres, cellulose	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45	
Diff. pressure (new) [mbar]	10	50	80	60	

	X5		X1		XA		AC	
	WALKER	OMEGA AIR	WALKER	OMEGA AIR	WALKER	OMEGA AIR	WALKER	OMEGA AIR
	E1003 X5	OWA E1003 X5/P AI	E1003 M1	OWA E1003 X1/M AI	E1003 XA	OWA E1003 XA/S AI	E1003 AC	OWA E1003 AC/A AI
	E2005 X5	OWA E2005 X5/P AI	E2005 M1	OWA E2005 X1/M AI	E2005 XA	OWA E2005 XA/S AI	E2005 AC	OWA E2005 AC/A AI
	E2505 X5	OWA E2505 X5/P AI	E2505 M1	OWA E2505 X1/M AI	E2505 XA	OWA E2505 XA/S AI	E2505 AC	OWA E2505 AC/A AI
	E2008 X5	OWA E2008 X5/P AI	E2008 M1	OWA E2008 X1/M AI	E2008 XA	OWA E2008 XA/S AI	E2008 AC	OWA E2008 AC/A AI
	E2508 X5	OWA E2508 X5/P AI	E2508 M1	OWA E2508 X1/M AI	E2508 XA	OWA E2508 XA/S AI	E2508 AC	OWA E2508 AC/A AI
	E2512 X5	OWA E2512 X5/P AI	E2512 M1	OWA E2512 X1/M AI	E2512 XA	OWA E2512 XA/S AI	E2512 AC	OWA E2512 AC/A AI
	E3012 X5	OWA E3012 X5/P AI	E3012 M1	OWA E3012 X1/M AI	E3012 XA	OWA E3012 XA/S AI	E3012 AC	OWA E3012 AC/A AI
	E3020 X5	OWA E3020 X5/P AI	E3020 M1	OWA E3020 X1/M AI	E3020 XA	OWA E3020 XA/S AI	E3020 AC	OWA E3020 AC/A AI
	E5020 X5	OWA E5020 X5/P AI	E5020 M1	OWA E5020 X1/M AI	E5020 XA	OWA E5020 XA/S AI	E5020 AC	OWA E5020 AC/A AI
	E5024 X5	OWA E5024 X5/P AI	E5024 M1	OWA E5024 X1/M AI	E5024 XA	OWA E5024 XA/S AI	E5024 AC	OWA E5024 AC/A AI
	E5030 X5	OWA E5030 X5/P AI	E5030 M1	OWA E5030 X1/M AI	E5030 XA	OWA E5030 XA/S AI	E5030 AC	OWA E5030 AC/A AI
	HP1550 X5	OWA HP1550 X5/P AI	HP1550 M1	OWA HP1550 X1/M AI	HP1550 XA	OWA HP1550 XA/S AI	HP1550 AC	OWA HP1550 AC/A AI
	HP2040 X5	OWA HP2040 X5/P AI	HP2040 M1	OWA HP2040 X1/M AI	HP2040 XA	OWA HP2040 XA/S AI	HP2040 AC	OWA HP2040 AC/A AI
	HP2080 X5	OWA HP2080 X5/P AI	HP2080 M1	OWA HP2080 X1/M AI	HP2080 XA	OWA HP2080 XA/S AI	HP2080 AC	OWA HP2080 AC/A AI
	HP2580 X5	OWA HP2580 X5/P AI	HP2580 M1	OWA HP2580 X1/M AI	HP2580 XA	OWA HP2580 XA/S AI	HP2580 AC	OWA HP2580 AC/A AI
	HP2512 X5	OWA HP2512 X5/P AI	HP2512 M1	OWA HP2512 X1/M AI	HP2512 XA	OWA HP2512 XA/S AI	HP2512 AC	OWA HP2512 AC/A AI
	HP2520 X5	OWA HP2520 X5/P AI	HP2520 M1	OWA HP2520 X1/M AI	HP2520 XA	OWA HP2520 XA/S AI	HP2520 AC	OWA HP2520 AC/A AI

OMEGA AIR

Air and Gas


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

WORTHINGTON CREYSSENSAC [new]

	P	G	C	V
WORTHINGTON CREYSSENSAC (new) Plastic end caps				
Particle retention	1 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	3	2	1	1*
Oils -q. class (ISO 8573-1)	-	2	1	1
Filter media	borosilicate micro fibres			activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	20	50	80	60

	P		G		C		V	
	WORTHINGTON CREYSSENSAC	OMEGA AIR	WORTHINGTON CREYSSENSAC	OMEGA AIR	WORTHINGTON CREYSSENSAC	OMEGA AIR	WORTHINGTON CREYSSENSAC	OMEGA AIR
FILTER 45		OWC 45 P/R	FILTER 45	OWC 45 G/M	FILTER 45	OWC 45 C/S	FILTER 45	OWC 45 V/A
FILTER 90		OWC 90 P/R	FILTER 90	OWC 90 G/M	FILTER 90	OWC 90 C/S	FILTER 90	OWC 90 V/A
FILTER 125		OWC 125 P/R	FILTER 125	OWC 125 G/M	FILTER 125	OWC 125 C/S	FILTER 125	OWC 125 V/A
FILTER 180		OWC 180 P/R	FILTER 180	OWC 180 G/M	FILTER 180	OWC 180 C/S	FILTER 180	OWC 180 V/A
FILTER 290		OWC 290 P/R	FILTER 290	OWC 290 G/M	FILTER 290	OWC 290 C/S	FILTER 290	OWC 290 V/A
FILTER 505		OWC 505 P/R	FILTER 505	OWC 505 G/M	FILTER 505	OWC 505 C/S	FILTER 505	OWC 505 V/A
FILTER 685		OWC 685 P/R	FILTER 685	OWC 685 G/M	FILTER 685	OWC 685 C/S	FILTER 685	OWC 685 V/A
FILTER 935		OWC 935 P/R	FILTER 935	OWC 935 G/M	FILTER 935	OWC 935 C/S	FILTER 935	OWC 935 V/A
FILTER 1295		OWC 1295 P/R	FILTER 1295	OWC 1295 G/M	FILTER 1295	OWC 1295 C/S	FILTER 1295	OWC 1295 V/A
FILTER 1890		OWC 1890 P/R	FILTER 1890	OWC 1890 G/M	FILTER 1890	OWC 1890 C/S	FILTER 1890	OWC 1890 V/A
FILTER 2430		OWC 2430 P/R	FILTER 2430	OWC 2430 G/M	FILTER 2430	OWC 2430 C/S	FILTER 2430	OWC 2430 V/A

* Valid if "S" filter cartridge is installed upstream.



ALTERNATIVE FILTER ELEMENTS

WORTHINGTON CREYSSENSAC (old)

	MBP	MBM	MBS	MBA
WORTHINGTON CREYSSENSAC (old) Plastic end caps				
Particle retention	3 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	2	1	1*
Oils -q. class (ISO 8573-1)	-	2	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	50	80	60

	MBP		MBM		MBS		MBA	
	WORTHINGTON CREYSSENSAC	OMEGA AIR	WORTHINGTON CREYSSENSAC	OMEGA AIR	WORTHINGTON CREYSSENSAC	OMEGA AIR	WORTHINGTON CREYSSENSAC	OMEGA AIR
MBP 60		OWC 60 MBP/P	MBM 60	OWC 60 MBM/M	MBS 60	OWC 60 MBAS/S	MBA 60	OWC 60 MBA/A
MBP 80		OWC 80 MBP/P	MBM 80	OWC 80 MBM/M	MBS 80	OWC 80 MBAS/S	MBA 80	OWC 80 MBA/A
MBP 120		OWC 120 MBP/P	MBM 120	OWC 120 MBM/M	MBS 120	OWC 120 MBS/S	MBA 120	OWC 120 MBA/A
MBP 200		OWC 200 MBP/P	MBM 200	OWC 200 MBM/M	MBS 200	OWC 200 MBS/S	MBA 200	OWC 200 MBA/A
MBP 340		OWC 340 MBP/P	MBM 340	OWC 340 MBM/M	MBS 340	OWC 340 MBS/S	MBA 340	OWC 340 MBA/A
MBP 510		OWC 510 MBP/P	MBM 510	OWC 510 MBM/M	MBS 510	OWC 510 MBS/S	MBA 510	OWC 510 MBA/A
MBP 800		OWC 800 MBP/P	MBM 800	OWC 800 MBM/M	MBS 800	OWC 800 MBS/S	MBA 800	OWC 800 MBA/A
MBP 1000		OWC 1000 MBP/P	MBM 1000	OWC 1000 MBM/M	MBS 1000	OWC 1000 MBS/S	MBA 1000	OWC 1000 MBA/A
MBP 1500		OWC 1500 MBP/P	MBM 1500	OWC 1500 MBM/M	MBS 1500	OWC 1500 MBS/S	MBA 1500	OWC 1500 MBA/A
MBP 2400		OWC 2400 MBP/P	MBM 2400	OWC 2400 MBM/M	MBS 2400	OWC 2400 MBS/S	MBA 2400	OWC 2400 MBA/A

* Valid if "S" filter cartridge is installed upstream.


OMEGA
AIR

ALTERNATIVE FILTER ELEMENTS

ZANDER GL

	VL	ZL	XL	A
ZANDER GL Plastic end caps				
Particle retention	3 µm	1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	3	1	1*
Oils -q. class (ISO 8573-1)	-	-	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	20	80	60

	VL		ZL		XL		A	
	ZANDER	OMEGA AIR	ZANDER	OMEGA AIR	ZANDER	OMEGA AIR	ZANDER	OMEGA AIR
	CP1008VL	OZA GL 1008 VL/P	CP1008ZL	OZA GL 1008 ZL/R	CP1008XL	OZA GL 1008 XL/S	CP1008A	OZA GL 1008 A/A
	CP2010VL	OZA GL 2010 VL/P	CP2010ZL	OZA GL 2010 ZL/R	CP2010XL	OZA GL 2010 XL/S	CP2010A	OZA GL 2010 A/A
	CP2020VL	OZA GL 2020 VL/P	CP2020ZL	OZA GL 2020 ZL/R	CP2020XL	OZA GL 2020 XL/S	CP2020A	OZA GL 2020 A/A
	CP3025VL	OZA GL 3025 VL/P	CP3025ZL	OZA GL 3025 ZL/R	CP3025XL	OZA GL 3025 XL/S	CP3025A	OZA GL 3025 A/A
	CP3040VL	OZA GL 3040 VL/P	CP3040ZL	OZA GL 3040 ZL/R	CP3040XL	OZA GL 3040 XL/S	CP3040A	OZA GL 3040 A/A
	CP4040VL	OZA GL 4040 VL/P	CP4040ZL	OZA GL 4040 ZL/R	CP4040XL	OZA GL 4040 XL/S	CP4040A	OZA GL 4040 A/A
	CP4050VL	OZA GL 4050 VL/P	CP4050ZL	OZA GL 4050 ZL/R	CP4050XL	OZA GL 4050 XL/S	CP4050A	OZA GL 4050 A/A
	CP4065VL	OZA GL 4065 VL/P	CP4065ZL	OZA GL 4065 ZL/R	CP4065XL	OZA GL 4065 XL/S	CP4065A	OZA GL 4065 A/A
	CP5065VL	OZA GL 5065 VL/P	CP5065ZL	OZA GL 5065 ZL/R	CP5065XL	OZA GL 5065 XL/S	CP5065A	OZA GL 5065 A/A
	CP5080VL	OZA GL 5080 VL/P	CP5080ZL	OZA GL 5080 ZL/R	CP5080XL	OZA GL 5080 XL/S	CP5080A	OZA GL 5080 A/A

* Valid if "S" filter cartridge is installed upstream.



ALTERNATIVE FILTER ELEMENTS

ZANDER

	V	Z (ZP)	Y	X (XP)	A
ZANDER Plastic end caps					
Particle retention	3 µm	1 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	3	2	1	1*
Oils -q. class (ISO 8573-1)	-	-	2	1	1
Filter media	acrylic fibres, cellulose	borosilicate micro fibres			activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	20	50	80	60

	V		Z (ZP)		Y		X (XP)		A	
	ZANDER	OMEGA AIR	ZANDER	OMEGA AIR	ZANDER	OMEGA AIR	ZANDER	OMEGA AIR	ZANDER	OMEGA AIR
1030 V		OZA 1030 V/P	1030 Z	OZA 1030 Z/R	1030 Y	OZA 1030 Y/M	1030 X	OZA 1030 X/S	1030 A	OZA 1030 A/A
1050 V		OZA 1050 V/P	1050 Z	OZA 1050 Z/R	1050 Y	OZA 1050 Y/M	1050 X	OZA 1050 X/S	1050 A	OZA 1050 A/A
1070 V		OZA 1070 V/P	1070 Z	OZA 1070 Z/R	1070 Y	OZA 1070 Y/M	1070 X	OZA 1070 X/S	1070 A	OZA 1070 A/A
1140 V		OZA 1140 V/P	1140 Z	OZA 1140 Z/R	1140 Y	OZA 1140 Y/M	1140 X	OZA 1140 X/S	1140 A	OZA 1140 A/A
2010 V		OZA 2010 V/P	2010 Z	OZA 2010 Z/R	2010 Y	OZA 2010 Y/M	2010 X	OZA 2010 X/S	2010 A	OZA 2010 A/A
2020 V		OZA 2020 V/P	2020 Z	OZA 2020 Z/R	2020 Y	OZA 2020 Y/M	2020 X	OZA 2020 X/S	2020 A	OZA 2020 A/A
2030 V		OZA 2030 V/P	2030 Z	OZA 2030 Z/R	2030 Y	OZA 2030 Y/M	2030 X	OZA 2030 X/S	2030 A	OZA 2030 A/A
2050 V		OZA 2050 V/P	2050 Z	OZA 2050 Z/R	2050 Y	OZA 2050 Y/M	2050 X	OZA 2050 X/S	2050 A	OZA 2050 A/A
3050 V		OZA 3050 V/P	3050 Z	OZA 3050 Z/R	3050 Y	OZA 3050 Y/M	3050 X	OZA 3050 X/S	3050 A	OZA 3050 A/A
3075 V		OZA 3075 V/P	3075 Z	OZA 3075 Z/R	3075 Y	OZA 3075 Y/M	3075 X	OZA 3075 X/S	3075 A	OZA 3075 A/A
5060 V		OZA 5060 V/P	5060 Z	OZA 5060 Z/R	5060 Y	OZA 5060 Y/M	5060 X	OZA 5060 X/S	5060 A	OZA 5060 A/A
5075 V		OZA 5075 V/P	5075 Z	OZA 5075 Z/R	5075 Y	OZA 5075 Y/M	5075 X	OZA 5075 X/S	5075 A	OZA 5075 A/A

* Valid if "S" filter cartridge is installed upstream.



OMEGA
AIR

ALTERNATIVE
FILTER ELEMENTS

ZANDER

ZANDER Aluminium end caps	V	Z (ZP)	Y	X (XP)	A
Particle retention	3 µm	1 µm	0,1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	6	3	2	1	1*
Oils -q. class (ISO 8573-1)	-	-	2	1	1
Filter media	acrylic fibres, cellulose		borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	10	20	50	80	60

	V		Z (ZP)		Y		X (XP)		A	
	ZANDER	OMEGA AIR	ZANDER	OMEGA AIR	ZANDER	OMEGA AIR	ZANDER	OMEGA AIR	ZANDER	OMEGA AIR
1030 V	OZA 1030 V/P AL		1030 Z	OZA 1030 Z/R AL	1030 Y	OZA 1030 Y/M AL	1030 X	OZA 1030 X/S AL	1030 A	OZA 1030 A/A AL
1050 V	OZA 1050 V/P AL		1050 Z	OZA 1050 Z/R AL	1050 Y	OZA 1050 Y/M AL	1050 X	OZA 1050 X/S AL	1050 A	OZA 1050 A/A AL
1070 V	OZA 1070 V/P AL		1070 Z	OZA 1070 Z/R AL	1070 Y	OZA 1070 Y/M AL	1070 X	OZA 1070 X/S AL	1070 A	OZA 1070 A/A AL
1140 V	OZA 1140 V/P AL		1140 Z	OZA 1140 Z/R AL	1140 Y	OZA 1140 Y/M AL	1140 X	OZA 1140 X/S AL	1140 A	OZA 1140 A/A AL
2010 V	OZA 2010 V/P AL		2010 Z	OZA 2010 Z/R AL	2010 Y	OZA 2010 Y/M AL	2010 X	OZA 2010 X/S AL	2010 A	OZA 2010 A/A AL
2020 V	OZA 2020 V/P AL		2020 Z	OZA 2020 Z/R AL	2020 Y	OZA 2020 Y/M AL	2020 X	OZA 2020 X/S AL	2020 A	OZA 2020 A/A AL
2030 V	OZA 2030 V/P AL		2030 Z	OZA 2030 Z/R AL	2030 Y	OZA 2030 Y/M AL	2030 X	OZA 2030 X/S AL	2030 A	OZA 2030 A/A AL
2050 V	OZA 2050 V/P AL		2050 Z	OZA 2050 Z/R AL	2050 Y	OZA 2050 Y/M AL	2050 X	OZA 2050 X/S AL	2050 A	OZA 2050 A/A AL
3050 V	OZA 3050 V/P AL		3050 Z	OZA 3050 Z/R AL	3050 Y	OZA 3050 Y/M AL	3050 X	OZA 3050 X/S AL	3050 A	OZA 3050 A/A AL
3075 V	OZA 3075 V/P AL		3075 Z	OZA 3075 Z/R AL	3075 Y	OZA 3075 Y/M AL	3075 X	OZA 3075 X/S AL	3075 A	OZA 3075 A/A AL
5060 V	OZA 5060 V/P AL		5060 Z	OZA 5060 Z/R AL	5060 Y	OZA 5060 Y/M AL	5060 X	OZA 5060 X/S AL	5060 A	OZA 5060 A/A AL
5075 V	OZA 5075 V/P AL		5075 Z	OZA 5075 Z/R AL	5075 Y	OZA 5075 Y/M AL	5075 X	OZA 5075 X/S AL	5075 A	OZA 5075 A/A AL

* Valid if "S" filter cartridge is installed upstream.



ALTERNATIVE STERILE/VENT FILTER ELEMENTS

ZANDER

	HB	ST-R	BL
ZANDER Stainless steel end caps 1.4301 (304)			
Particle retention	0,01 µm	0,01 µm	0,01 µm
Solids - q. class (ISO 8573-1)	1	1	1
Oils - q. class (ISO 8573-1)	-	-	-
Filter media	borosilicate micro fibres		
Operating temp. range [°C]	-20 to 150	-20 to 150	-20 to 150
Diff. pressure (new) [mbar]	80 mbar	80 mbar	80 mbar

	HB		ST-R		BL	
	ZANDER	OMEGA AIR	ZANDER	OMEGA AIR	ZANDER	OMEGA AIR
	HB 09 T	OZA 09T ST-R	ST-R 1080	OZA 1080 ST-R	BL 1160	OZA 1160 BE
	HB 13 T	OZA 13T ST-R	ST-R 1160	OZA 1160 ST-R	BL 2026	OZA 2026 BE
	HB 14 T	OZA 14T ST-R	ST-R 2016	OZA 2016 ST-R	BL 2038	OZA 2038 BE
	HB 18 T	OZA 18T ST-R	ST-R 2026	OZA 2026 ST-R	BL 2055	OZA 2055 BE
	HB 19 T	OZA 19T ST-R	ST-R 2038	OZA 2038 ST-R	BL 3055	OZA 3055 BE
			ST-R 2055	OZA 2055 ST-R	BL 3080	OZA 3080 BE
			ST-R 3055	OZA 3055 ST-R		
			ST-R 3080	OZA 3080 ST-R		



OMEGA
AIR

ALTERNATIVE
PROCESS FILTER ELEMENTS

ZANDER

ZANDER Stainless steel end caps 1.4301 (304)	D 25 µm	D 1 µm	V	
				
	Particle retention	20 µm	1 µm	3 µm
	Solids - q. class (ISO 8573-1)	-	-	6
	Oils -q. class (ISO 8573-1)	-	-	-
Filter media	sintered inox		acrylic fibres, cellulose	
Operating temp. range [°C]	0 - 150	0 - 150	1,5 to 65	
Diff. pressure (new) [mbar]	60	60	10	

	D 25 µm		D 1 µm		V	
	ZANDER	OMEGA AIR	ZANDER	OMEGA AIR	ZANDER	OMEGA AIR
	D 09T 25µm	OZA 09T D/PIW 20mic	D 09T 1µm	OZA 09T D/PIW 1mic	V 09 T	OZA 09T V/P
	D 13T 25µm	OZA 13T D/PIW 20mic	D 13T 1µm	OZA 13T D/PIW 1mic	V 13 T	OZA 13T V/P
	D 14T 25µm	OZA 14T D/PIW 20mic	D 14T 1µm	OZA 14T D/PIW 1mic	V 14 T	OZA 14T V/P
	D 18T 25µm	OZA 18T D/PIW 20mic	D 18T 1µm	OZA 18T D/PIW 1mic	V 18 T	OZA 18T V/P
	D 19T 25µm	OZA 19T D/PIW 20mic	D 19T 1µm	OZA 19T D/PIW 1mic	V 19 T	OZA 19T V/P

* Valid if "S" filter cartridge is installed upstream.

ZANDER Stainless steel end caps 1.4301 (304)	ZP	XP	A
			
Particle retention	1 µm	0,01 µm	activated carbon
Solids - q. class (ISO 8573-1)	3	1	1*
Oils - q. class (ISO 8573-1)	-	1	1
Filter media	borosilicate micro fibres		activated carbon
Operating temp. range [°C]	1,5 to 65	1,5 to 65	1,5 to 45
Diff. pressure (new) [mbar]	20	80	60

	ZP		XP		A	
	ZANDER	OMEGA AIR	ZANDER	OMEGA AIR	ZANDER	OMEGA AIR
	ZP 09 T	OZA 09T ZP/R	XP 09 T	OZA 09T XP/S	A 09 T	OZA 09T A/A
	ZP 13 T	OZA 13T ZP/R	XP 13 T	OZA 13T XP/S	A 13 T	OZA 13T A/A
	ZP 14 T	OZA 14T ZP/R	XP 14 T	OZA 14T XP/S	A 14 T	OZA 14T A/A
	ZP 18 T	OZA 18T ZP/R	XP 18 T	OZA 18T XP/S	A 18 T	OZA 18T A/A
	ZP 19 T	OZA 19T ZP/R	XP 19 T	OZA 19T XP/S	A 19 T	OZA 19T A/A



OMEGA
AIR

ALTERNATIVE
FILTER ELEMENTS

ZONDER

ZONDER Plastic end caps	MBM	MBS
		
Particle retention	0,1 µm	0,01 µm
Solids - q. class (ISO 8573-1)	2	1
Oils -q. class (ISO 8573-1)	2	1
Filter media	borosilicate micro fibres	
Operating temp. range [°C]	1,5 to 65	1,5 to 65
Diff. pressure (new) [mbar]	50	80

	MBM		MBS	
	ZONDER	OMEGA AIR	ZONDER	OMEGA AIR
	MBM 10	OZO 10 MBM/M	MBS 10	OZO 10 MBS/S
	MBM 13	OZO 13 MBM/M	MBS 13	OZO 13 MBS/S
	MBM 20	OZO 20 MBM/M	MBS 20	OZO 20 MBS/S
	MBM 33	OZO 33 MBM/M	MBS 33	OZO 33 MBS/S
	MBM 60	OZO 60 MBM/M	MBS 60	OZO 60 MBS/S
	MBM 85	OZO 85 MBM/M	MBS 85	OZO 85 MBS/S
	MBM 130	OZO 130 MBM/M	MBS 130	OZO 130 MBS/S
	MBM 170	OZO 170 MBM/M	MBS 170	OZO 170 MBS/S
	MBM 250	OZO 250 MBM/M	MBS 250	OZO 250 MBS/S
	MBM 400	OZO 400 MBM/M	MBS 400	OZO 400 MBS/S

OMEGA AIR

Air and Gas



ALTERNATIVE FILTER HOUSINGS

132 **DONALDSON**

132 **DOMNICK HUNTER**

ALTERNATIVE WATER/OIL SEPARATOR ELEMENTS

134 **JORC**
(Boge)

134 **BEKO**
(Atlas Copco, Kaeser, Ecoair, Schnider)

134 **WORTMANN**
(Zander, Kaeser, Hankinson)

135 **DOMNICK HUNTER**
(Hiross, Zander, Hiross, Compair, Ingersoll Rand)

135 **DONALDSON**
(Almig, Gardner Denver)

135 **KAESER**

136 **ATLAS COPCO**
(Alup, Abac)

136 **OMI**
(Devair)

ALTERNATIVE DESSICANT DRYERS CARTRIDGES

137 **DONALDSON**
Ultracac 2000

ALTERNATIVE DRYER SERVICE KITS


138 **HANKISON**



OMEGA
AIR

ALTERNATIVE FILTER HOUSINGS

DONALDSON / DOMNICK HUNTER

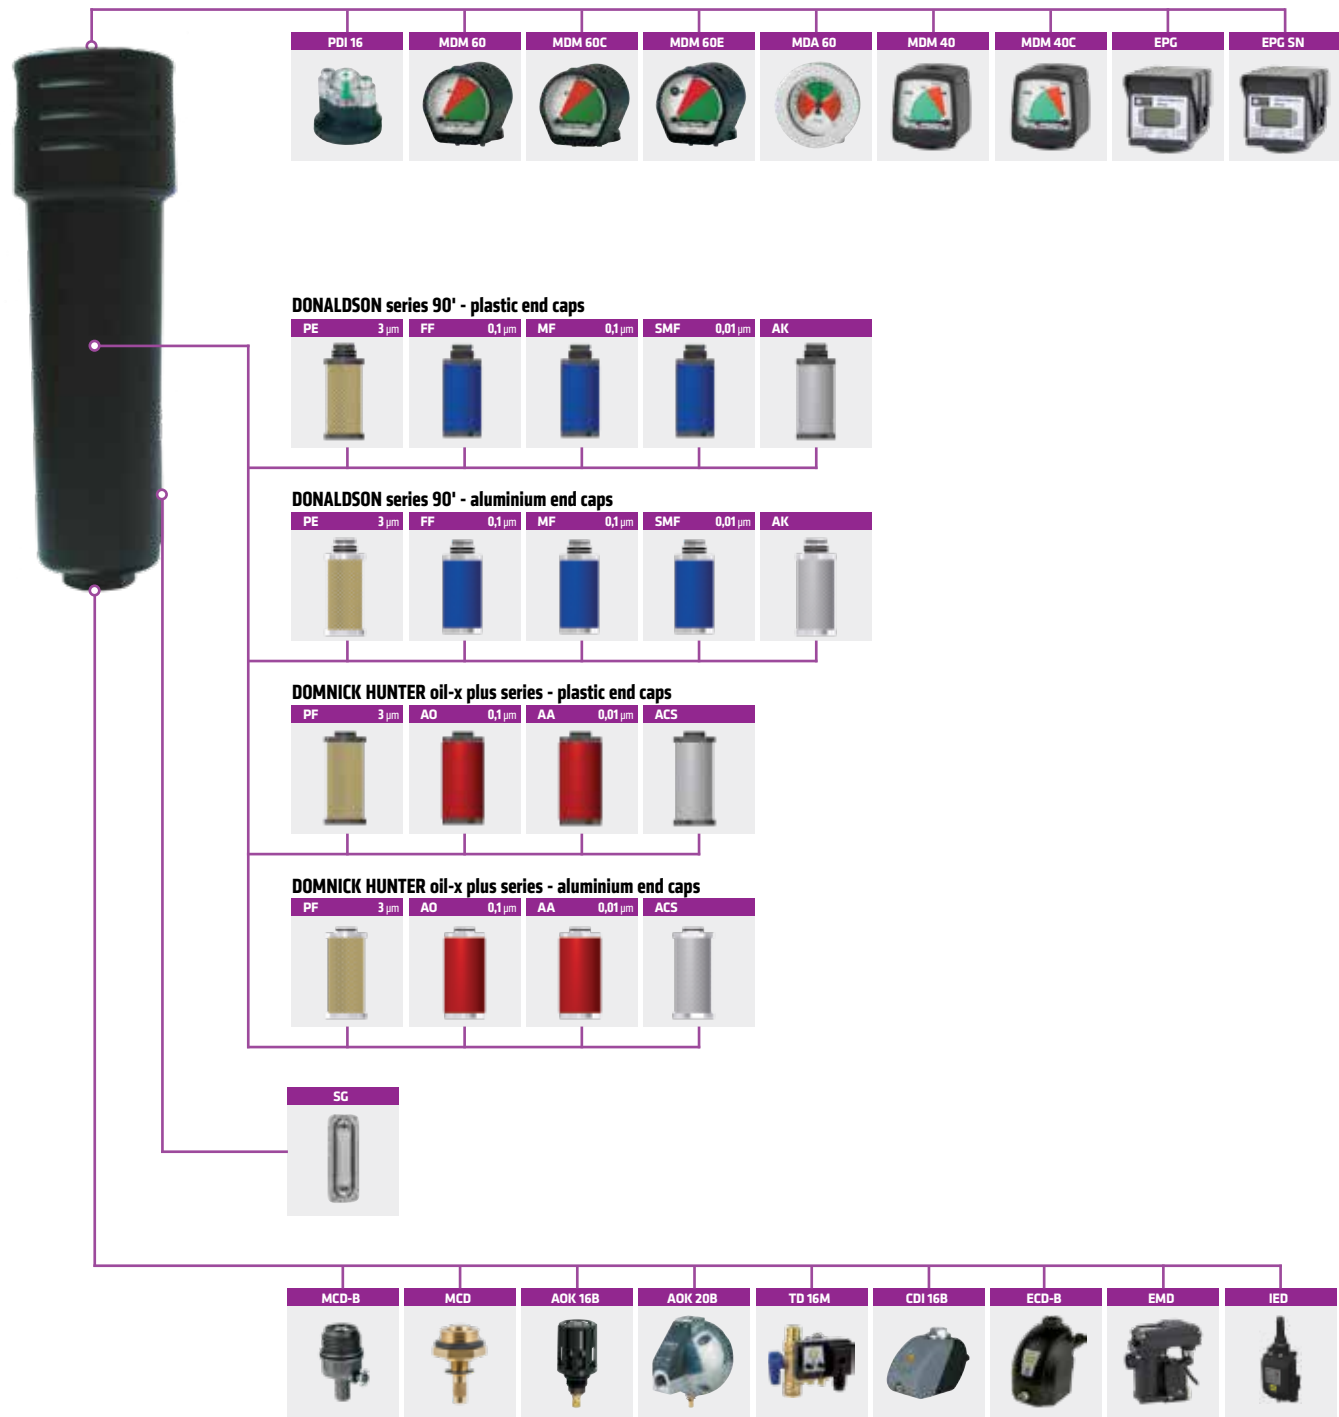

DONALDSON ALTERNATIVE FILTER HOUSINGS

Filter housing model	Pipe size	Flow rate Nm ³ /h	Dimensions				Mass	Filter element type
	inch		A [mm]	B [mm]	C [mm]	D [mm]	kg	
FD 0002	1/4"	20	196	80	21	60	0,439	02/05
FD 0004	3/8"	40	196	80	21	60	0,436	03/05
FD 0006	3/8"	60	196	80	21	60	0,436	03/10
FD 0009	1/2"	90	266	80	21	80	0,760	04/10
FD 0012	1/2"	120	263	117	33	100	1,182	04/20
FD 0018	3/4"	180	363	117	33	120	1,575	05/20
FD 0027	1"	270	363	117	33	140	1,558	05/25
FD 0036	1 1/4"	360	363	117	33	160	1,573	07/25
FD 0048	1 1/2"	480	700	140	50	320	3,017	07/30
FD 0072	2"	720	700	140	50	320	2,862	10/30
FD 0108	2"	1080	700	140	50	520	5,329	15/30
FD 0144	2 1/2"	1440	811	217	69	630	13,144	20/30
FD 0192	3"	1920	811	217	69	630	12,794	30/30
FD 0288	3"	2880	1000	217	69	750	15,756	30/50



DOMNICK HUNTER ALTERNATIVE FILTER HOUSINGS

Filter housing model	Pipe size	Flow rate Nm ³ /h	Dimensions				Mass	Filter element type
	inch		A [mm]	B [mm]	C [mm]	D [mm]	kg	
FDH 009	1/4"	32	196	80	21	60	0,547	009
FDH 017	3/8"	61	266	80	21	60	0,545	017
FDH 030	1/2"	108	266	80	21	60	0,760	030
FDH 058	3/4"	216	363	117	33	120	2,245	058
FDH 080	1"	288	461	117	33	260	1,880	145
FDH 120	1 1/4"	432	461	117	33	260	1,895	145
FDH 145	1 1/2"	522	461	117	33	260	2,504	145
FDH 205	1 1/2"	720	700	140	50	320	3,028	220
FDH 220	2"	792	700	140	50	320	2,876	220
FDH 330	2"	1188	950	140	50	520	7,224	330
FDH 400	2 1/2"	1440	811	217	69	630	13,501	430
FDH 430	3"	1548	811	217	69	630	13,060	430
FDH 620	3"	2232	1000	217	69	750	9,797	620

CORRECTION FACTORS

Operating pressure [bar]	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Correction factor	0,38	0,52	0,63	0,75	0,88	1,00	1,13	1,26	1,38	1,52	1,65	1,76	1,87	2,00	2,14


OMEGA
AIR

ALTERNATIVE WATER/OIL SEPARATOR ELEMENTS

PRODUCER	SUITABLE FOR SEPARATOR	OMEGA AIR	KIT CONTENT
JORC	BOGE		
Puro Mini	CC 4	OJO Puro Mini	1xAC, 1xPP
Puro	CC 8	OJO Puro	1xAC, 1xPP
Puro Midi	CC 20	OJO Puro Midi	1xAC, 1xPP
Puro Grand	CC 35	OJO Puro Grand	1xAC, 1xPP
Xtender	Extender	OJO Xtender	1xAC
SEPREMIUM 5	-	OJO SEP5	1xAC, 1xPP
SEPREMIUM 10	-	OJO SEP10	1xAC, 2xPP
SEPREMIUM 20	-	OJO SEP20	1xAC, 2xPP
SEPREMIUM 30	-	OJO SEP30	2xAC, 2xPP

PRODUCER	SUITABLE FOR SEPARATOR				OMEGA AIR	KIT CONTENT
BEKO (BOGE)	ATLAS COPCO	KAESER	ECOIR	SCHNEIDER		
ÖWAMAT 1 / 2	OSW 5 / 11	AQUAMAT 1 / 2	-	OWATEC 10 / 40	OBK OWM 1,2	1xAC, 1xPP
ÖWAMAT 3	-	AQUAMAT 3	TS 3	-	OBK OWM 3	1xAC
ÖWAMAT 4	OSW 30	AQUAMAT 4	TS 4	OWATEC 130	OBK OWM 4	1xAC+PP
ÖWAMAT 5	-	AQUAMAT 5	TS 15	-	OBK OWM 5	2xAC
ÖWAMAT 5R	OSW 55	AQUAMAT 5R	-	OWATEC 175	OBK OWM 5R	1xAC, 1xPP
ÖWAMAT 6	OSW 110	AQUAMAT 6	TS 16	OWATEC 250	OBK OWM 6	2xAC, 1xPP
ÖWAMAT 8	OSW 315	AQUAMAT 8	-	-	OBK OWM 8	2xAC, 1xPP
ÖWAMAT 10					OBK OWM 10	6xAC+PP
ÖWAMAT 11					OBK OWM 11	1xAC+PP
ÖWAMAT 20	-	AQUAMAT 20	TS 60	-	OBK OWM 20	4xAC

PRODUCER	SUITABLE FOR SEPARATOR					OMEGA AIR	KIT CONTENT
WORTMANN	EKOLOG	WORTMANN / KAESER	HANKISON	ZANDER			
DRUKOMAT 1/ MINI	EKOLOG 1/ MINI		HSMK1	HS 60, 120	ECOSEP S1/ mini	OWO DRM 1, mini	1x1085W, 1x1088L
DRUKOMAT 2	EKOLOG 2	WOI-II	HSMK2	HS 140-480	ECOSEP S2	OWO DRM 2,4,8	1x1087W, 1x1088L
DRUKOMAT 4	EKOLOG 4	WOI-II	HSMK3	HS 140-480	ECOSEP S4	OWO DRM 2,4,8	1x1087W, 1x1088L
DRUKOMAT 8	EKOLOG 8	WOI-II	HSMK4	HS 140-480	ECOSEP S8	OWO DRM 2,4,8	1x1087W, 1x1088L
DRUKOMAT 15	EKOLOG 15	WOI-II	HSMK5	HS 900	ECOSEP S15	OWO DRM 15	1x1094VF, 1x1087W, 1x1088L
DRUKOMAT 30	EKOLOG 30	WOIII	HSMK6	HS 1800	ECOSEP S30	OWO DRM 30	1x1094VF, 2x1087W, 1x1088L
DRUKOMAT 61	EKOLOG 61	WOIV	HSMK7	HS 3600	ECOSEP S61	OWO DRM 61	1x1094VF, 4x1087W, 1x4/1094VF, 1x1088L
DRUKOSEP 1						OWO DRS 1	1xAC+PP
DRUKOSEP 2						OWO DRS 2	1xAC+PP
DRUKOSEP 3						OWO DRS 3	1xAC+PP
DRUKOSEP 6						OWO DRS 6	1xAC+PP
DRUKOSEP 8						-	-
DRUKOSEP 10						-	-

PRODUCER	SUITABLE FOR SEPARATOR						OMEGA AIR	KIT CONTENT
DOMNICK HUNTER ES	DOMNICK HUNTER H2 OIL-X	DOMNICK HUNTER ES	HIROSS OWS	ZANDER ECOSEP SL	COMPAIR CS	INGERSOLL RAND ENVIROSEP		
	SE2010						ODH SE2010	1xAC+PP
	SE2015						ODH SE2015	1xAC, 1xPP
	SE2030						ODH SE2030	2xAC*,1xPP
ES2100		ES36	OWS 001	SL1*	CS2100	ECS 6	ODH ES2100	1xAC, 1xPP
ES2150		ES90	OWS 060	SL2*	CS2150	ECS 12	ODH ES2150	1xAC, 1xPP
ES2200			OWS 075	SL5*	CS2200	ECS 18	ODH ES2200	1xAC, 1xPP
ES2300		ES125	OWS 125	SL8*	CS2300	ECS 24	ODH ES2300	1xAC, 1xPP
ES2400		ES250	OWS 185	SL15*	CS2400	ECS 30	ODH ES2400	2xAC, 2xPP
ES2500		ES500	OWS 355	SL30*	CS2500	ECS 36	ODH ES2500	1xAC, 1xPP
ES2600		ES1000	OWS 485	SL60*	CS2600	ECS 42	ODH ES2600	2xAC, 2xPP

PRODUCER	SUITABLE FOR SEPARATOR		OMEGA AIR	KIT CONTENT
DONALDSON	ALMIG AQUAMAT	GARDNER DENVER		

Ultrasep Plus

ULTRASEP P7,5			ODO UP7,5	1xAC
ULTRASEP P15			ODO UP15	1xAC
ULTRASEP P30			ODO UP30	1xAC
ULTRASEP P60			ODO UP60	2xAC
ULTRASEP P120			ODO UP120	4xAC
ULTRASEP P240			ODO UP240	8xAC

Ultrasep Super Plus

ULTRASEP SP5		GDW 5	-	-
ULTRASEP SP7,5/ 10		GDW 10	-	-
ULTRASEP SP15		GDW 15	ODO USP15	1xAC, 1xPP
ULTRASEP SP30		GDW 30	ODO USP30	2xAC, 1xPP
ULTRASEP SP60		GDW 60	ODO USP60	2xAC, 1xPP
ULTRASEP SP120		GDW 120	ODO USP120	4xAC, 2xPP
ULTRASEP SP240		GDW 240	ODO USP240	8xAC, 4xPP

Ultrasep Super Plus - N

ULTRASEP SP5	120	GDW 5	-	-
ULTRASEP SP10N	250	GDW 10N	ODO USP10N	1xAC+PP
ULTRASEP SP15N	450	GDW 15N	ODO USP15N	1xAC+PP
ULTRASEP SP30N	900	GDW 30N	ODO USP30N	1xAC+PP, 1xAC
ULTRASEP SP60N	1800	GDW 60N	ODO USP60N	1xAC+PP, 1xAC
ULTRASEP SP120N	3600	GDW 120N	ODO USP120N	2xAC+PP, 2xAC
ULTRASEP SP240N	7200	GDW 240N	ODO USP240N	4xAC+PP, 4xAC

PRODUCER	OMEGA AIR	KIT CONTENT
KAESER		
AQUAMAT CF3	OKA ACF3	1xAC + 1xPP
AQUAMAT CF6	OKA ACF6	1xAC + 1xPP

PRODUCER		SUITABLE FOR SEPARATOR			OMEGA AIR	KIT CONTENT
ATLAS COPCO		ALUP OWS	ABAC WS	PNEVMATEC		
OSC35	Service kit A	OWS13	WS13	OWS-75	OAC OSC 35 - A	1xPP
	Service kit B				OAC OSC 35 - B	1xAC, 2xPP
	Service kit C				OAC OSC 35 - C	1xAC, 1xPP
OSC95	Service kit A	OWS34	WS34	OWS-200	OAC OSC 95 - A	1xPP
	Service kit B				OAC OSC 95 - B	1xAC, 2xPP
	Service kit C				OAC OSC 95 - C	1xAC, 1xPP
OSC145	Service kit A	OWS52	WS52	OWS-300	OAC OSC 145 - A	1xPP
	Service kit B				OAC OSC 145 - B	1xAC, 2xPP
	Service kit C				OAC OSC 145 - C	1xAC, 1xPP
OSC355	Service kit A	OWS128	WS128	OWS-750	OAC OSC 355 - A	2xPP
	Service kit B				OAC OSC 355 - B	2xAC, 4xPP
	Service kit C				OAC OSC 355 - C	2xAC, 2xPP
OSC600	Service kit A	OWS218	WS218	OWS-1280	OAC OSC 600 - A	2xPP
	Service kit B				OAC OSC 600 - B	2xAC, 4xPP
	Service kit C				OAC OSC 600 - C	2xAC, 2xPP
OSC825	Service kit A	OWS297	WS297	OWS-1750	OAC OSC 825 - A	2xPP
	Service kit B				OAC OSC 825 - B	4xAC, 4xPP
	Service kit C				OAC OSC 825 - C	4xAC, 2xPP
OSC1200	Service kit A	OWS425	WS425	OWS-2500	OAC OSC 1200 - A	2xPP
	Service kit B				OAC OSC 1200 - B	4xAC, 4xPP
	Service kit C				OAC OSC 1200 - C	4xAC, 2xPP
OSC2400	Service kit A	OWS850	WS850	OWS-5000	OAC OSC 2400 - A	4xPP
	Service kit B				OAC OSC 2400 - B	8xAC, 8xPP
	Service kit C				OAC OSC 2400 - C	8xAC, 4xPP

PRODUCER	SUITABLE FOR SEPARATOR	OMEGA AIR	KIT CONTENT
OMI	DEVAIR		
ECOTRON 25	ECOTRON 25	OOM KTRON 25	1xAC, 1xPP
ECOTRON 50	ECOTRON 50	OOM KTRON 50	1xAC, 2xPP
ECOTRON 90	ECOTRON 90	OOM KTRON 90	1xAC, 2xPP
ECOTRON 180	ECOTRON 180	OOM KTRON 180	1xAC, 4xPP
ECOTRON 300	ECOTRON 300	OOM KTRON 300	2xAC, 2xPP
ECOTRON 600	ECOTRON 600	OOM KTRON 600	3xAC, 4xPP



ALTERNATIVE DESSICANT DRYERS CARTRIDGES

DONALDSON Ultrapac 2000

DONALDSON				OMEGA AIR
DRYER TYPE		FILTER ELEMENT TYPE	NUMBER OF CARTRIDGES PER DRYER	
US title	EU title			
UP0003-60	0005	10/2	2	OD0 10/2 MS
UP0005-60	0010	10/2	4	OD0 10/2 MS
UP0010-60	0015	10/2	6	OD0 10/2 MS
UP0015-60	0025	10/2	10	OD0 10/2 MS
UP0020-60	0035	10/4	4	OD0 10/4 MS
UP0030-60	0050	10/4	6	OD0 10/4 MS
UP0040-60	0065	10/4	8	OD0 10/4 MS
UP0050-60	0080	10/4	10	OD0 10/4 MS
UP0060-60	0100	10/4	12	OD0 10/4 MS


OMEGA
AIR

ALTERNATIVE DRYER SERVICE KITS

HANKISON

HANKISON		OMEGA AIR
DRYER TYPE	ORIGINAL SERVICE KIT TYPE	
HHD10 / HHD20 / HHD30	HPRMK 1	OHK HPRMK 1
HHDp50 / HHDp70	HPRMK 2	OHK HPRMK 2
HHDp100	HPRMK 3	OHK HPRMK 3
HHDp150 / HHDp210	HPRMK 4	OHK HPRMK 4
HHDp211	HPRMK 4.5	OHK HPRMK 4.5
HHDp211	HPRMK 4.5.1	OHK HPRMK 4.5.1
HHDp260 / HHDp300	HPRMK 5	OHK HPRMK 5
HHDp261 / HHDp301	HPRMK 5.5	OHK HPRMK 5.5
HHDp261 / HHDp301	HPRMK 5.5.1	OHK HPRMK 5.5.1
HHDp380	HPRMK 6	OHK HPRMK 6
HHDp381 / HHDp481	HPRMK 6.5	OHK HPRMK 6.5
HHDp381 / HHDp481	HPRMK 6.5.1	OHK HPRMK 6.5.1
HHDp480 / HHDp600	HPRMK 7	OHK HPRMK 7
HHDp601	HPRMK 7.5	OHK HPRMK 7.5
HHDp601	HPRMK 7.5.1	OHK HPRMK 7.5.1
HHDp750 / HHDp950	HPRMK 8	OHK HPRMK 8
HHDp791	HPRMK 8.3	OHK HPRMK 8.3
HHDp791	HPRMK 8.3.1	OHK HPRMK 8.3.1
HHDp951 / HHDp1151	HPRMK 8.6	OHK HPRMK 8.6
HHDp951 / HHDp1151	HPRMK 8.6.1	OHK HPRMK 8.6.1
HHDp1450	HPRMK 9	OHK HPRMK 9
HHDp1451	HPRMK 9.5	OHK HPRMK 9.5
HHDp1451	HPRMK 9.5.1	OHK HPRMK 9.5.1
HD11 / HD22	RDMK1	OHK RDMK1
HD33/HD55/HD75 (8015, 8025, 8035)	RDMK2	OHK RDMK2
HD33 / HD55 / HD75	RDMK2-M	OHK RDMK2-M
HD105	RDMK4	OHK RDMK4
HD150 / HD220 / HD270 / HD305	RDMK5	OHK RDMK5
HD390 / HD490	RDMK7	OHK RDMK7



IMPORTANT

As manufacturer and specialist for filtration equipment Omega Air offers one of the most comprehensive ranges of alternative filter elements. Filter elements are designed to fit to original manufacturers equipment while Omega Air know-how is implemented to achieve required compressed air quality.

Despite fact that some dimensions or some details are different compared to original parts our alternative filter elements fit original filter housings.

Due to continuous improvement of our products, specifications and appearances may change without prior notice.

CUSTOMISED PRODUCTS

A large part of our manufacturing capacity is suited for customized products. We take part in the developing of the products together with our customers. If you have a project in our range of products and need a co-operating partner do not hesitate to contact us

End cap engraving



End cap printing




GENERAL TERMS OF SALES

General conditions:	Exclusively valid "The general sales conditions" of company Omega Air d.o.o. Ljubljana.
Terms of delivery:	Incoterms EXW Ljubljana, Slovenia, packing included.
Terms of payment:	Payment in advance if not otherwise agreed. Currency is EUR.
Warranty:	One year from date of delivery. Warranty valid only if the product is used in accordance with its instruction manual. Other costs such as labour costs are not included.
Changes:	We reserve the right for typing errors and right to change the prices, conditions and technical specifications of the products without previous announcement.
Packing and packing waste:	The customer in the recipient country is responsible for the recycling of packaging and disposal of waste electrical equipment in accordance with local directives.
Right of ownership:	Delivered products remain in our possession until full payment has been settled.

The above mentioned sales terms and conditions are only for information and are published on our website www.omega-air.si. All other details are defined in written agreement between contract parties.

Notes

AIR & GAS department - Team

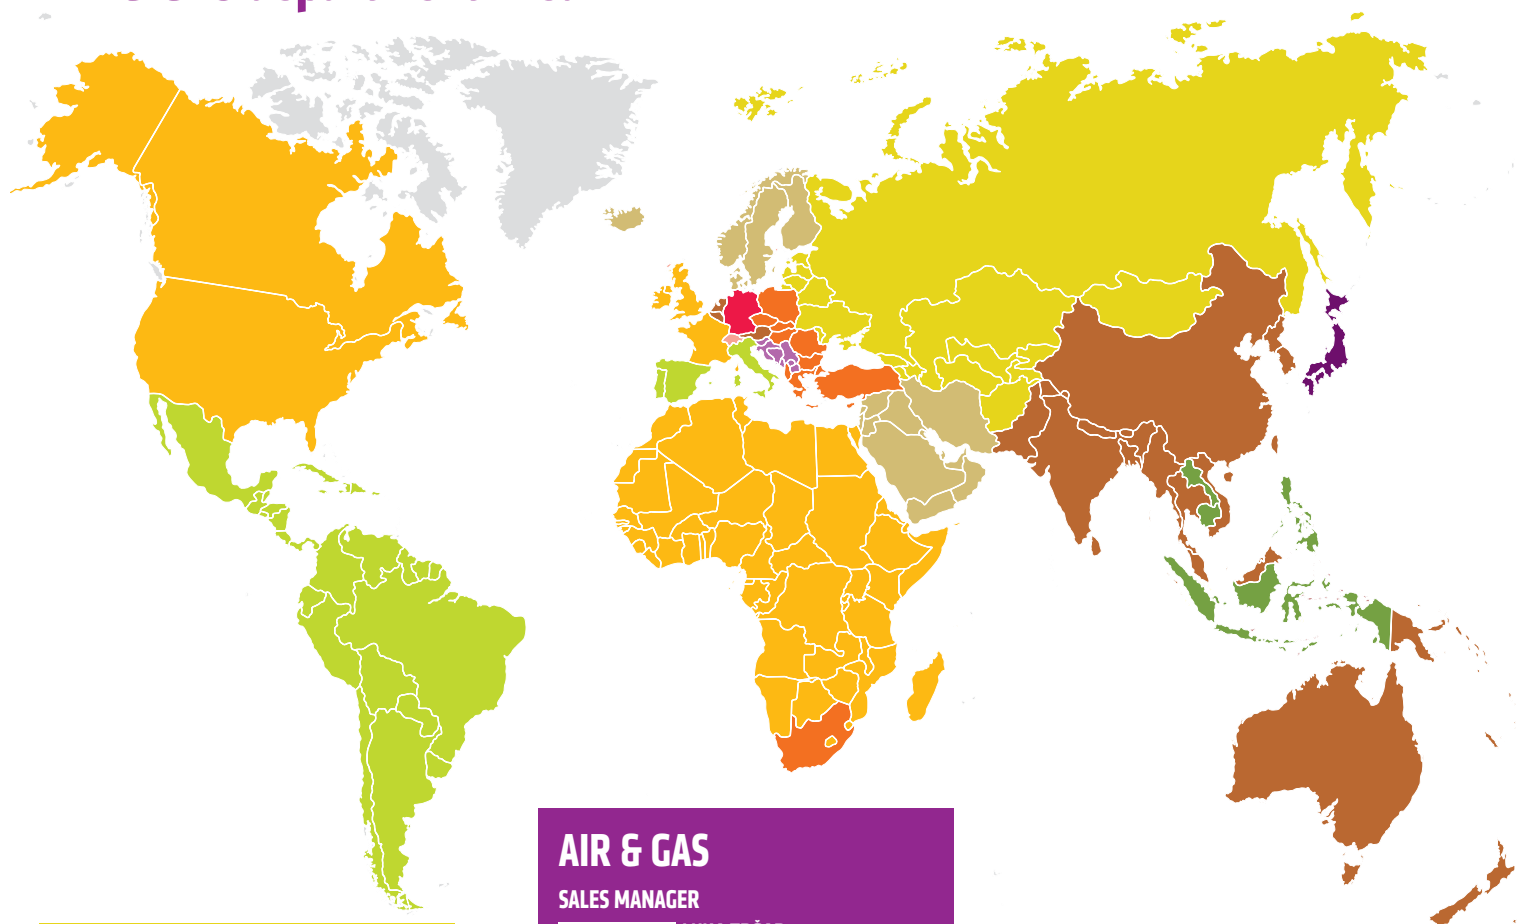

CIS Countries, Baltic

AREA SALES MANAGER



EKATERINA BERNIK
T +386 1 200 68 68
M +386 30 362 192
F +386 1 200 68 53
ekaterina.bernik@omega-air.si

Languages:

SALES ASSISTANT



ŽANNA LAPINA NABERGOJ
T +386 1 200 68 15
M +386 30 478 808
F +386 1 200 68 53
zanna.lapina@omega-air.si

Languages:

SALES ASSISTANT



SABINA KOŽAR
T +386 1 330 42 25
F +386 1 200 68 53
sabina.kozar@omega-air.si

Languages:

SALES ADMINISTRATOR



JANJA BOGATAJ
T +386 1 200 68 04
F +386 1 200 68 53
janja.bogataj@omega-air.si

Languages:

AIR & GAS

SALES MANAGER



LUKA TRŠAR
T +386 1 200 68 13
M +386 30 362 190
F +386 1 200 68 53
luka.trsar@omega-air.si

Languages:

Benelux, Austria, Asia, Oceania

AREA SALES MANAGER



MARTIN SOJER
T +386 1 200 68 39
M +386 30 362 191
F +386 1 200 68 53
martin.sojer@omega-air.si

Languages:

SALES ADMINISTRATOR



TANJA TRŠAR
T +386 1 200 68 43
F +386 1 200 68 53
tanja.trsar@omega-air.si

Languages:

SALES ADMINISTRATOR



ANJA ŠAVS
T +386 1 200 68 46
F +386 1 200 68 53
anja.savs@omega-air.si

Languages:

France, Canada, USA, Africa, UK

AREA SALES MANAGER



BAPTISTE CALVET
T +386 1 200 68 61
M +386 30 362 197
F +386 1 200 68 53
baptiste.calvet@omega-air.si

Languages:

SALES ASSISTANT



MAJA GRAMPOVČAN
T +386 1 200 68 69
F +386 1 200 68 53
maja.grampovcan@omega-air.si

Languages:

SALES ADMINISTRATOR



VESNA PRIJATELJ
T +386 1 200 68 30
F +386 1 200 68 53
vesna.prijatelj@omega-air.si

Languages:

East Europe, Greece, South Africa**AREA SALES MANAGER**

ŠPELA PERC
T +386 1 200 68 69
M +386 30 362 194
F +386 1 200 68 53
spela.perc@omega-air.si

Languages:

SALES ADMINISTRATOR

MARTA FURLAN
T +386 1 200 68 19
F +386 1 200 68 53
marta.furlan@omega-air.si

Languages:

Middle East, Scandinavia**AREA SALES MANAGER**

UROŠ OGRIN
T +386 1 200 68 38
M +386 30 478 820
F +386 1 200 68 53
uros.ogrin@omega-air.si

Languages:

SALES ASSISTANT

VESNA BOŽIDAR
T +386 1 330 42 22
F +386 1 200 68 53
vesna.bozidar@omega-air.si

Languages:

OMEGA AIR Japan**PROCURATOR**

HIRO HANAWA
T +81 (0) 45 228 5118
M +81 (0) 90 5336 0303
hiro.hanawa@jp.omega-air.si

Languages:

OMEGA AIR South East Asia**PROCURATOR**

BRIAN HERBERT
T +62 21 2953 8856
+62 812 9779 0982
brian.herbert@sea.omega-air.si

Languages:

Slovenia, Croatia, Serbia, Bosnia and Herzegovina, Montenegro, FYROM**SALES MANAGER - domestic sales**

GREGOR OSTRONIČ
T +386 1 200 68 22
M +386 30 362 126
gregor.ostronic@omega-air.si

Languages:

OMEGA AIR GMBH - distribution**PROCURATOR**

DR. WALTER STEUDLE
M +49 (0) 173 7142726
walter.steudle@omega-air.de

Languages:

AREA SALES MANAGER - NORTH/NORTH-EAST GERMANY

OLAF LISSEL
T +49 (0) 5341 3988782
M: +49 (0) 172 3900640
olaf.lissel@omega-air.de

Languages:

AREA SALES MANAGER - CENTRAL/WEST GERMANY

CHRISTIAN BRAUCKMANN
T: +49 (0) 1525 2880989
christian.brauckmann@omega-air.de

Languages:

Italy, Spain, Portugal, South America**AREA SALES MANAGER**

TILLEN LOVREČIĆ
T +386 1 200 68 02
M +386 30 362 180
F +386 1 200 68 53
tilen.lovrecic@omega-air.si

Languages:

SALES ASSISTANT

ROSMERY IDINA MÉNDEZ
T +386 1 200 68 05
M +386 30 478 807
F +386 1 200 68 53
rosmery.idinamendez@omega-air.si

Languages:

SALES ASSISTANT

ANDRES LENARČIČ
T +386 1 200 68 76
F +386 1 200 68 53
andres.lenarcic@omega-air.si

Languages:

SALES ADMINISTRATOR

POLONA ŽAGAR AKYOL
T +386 1 330 42 28
F +386 1 200 68 53
polona.zagarakyl@omega-air.si

Languages:

Germany (OEM), Switzerland**AREA SALES MANAGER**

ERIK KRUSEC
T +386 1 200 68 60
M +386 30 362 140
F +386 1 200 68 53
erik.krusec@omega-air.si

Languages:

SALES ASSISTANT

ANDRAŽ MASEL ŠTEMBAL
T +386 1 200 68 25
M +386 30 478 811
F +386 1 200 68 53
andraz.masel-stembal@omega-air.si

Languages:

SALES ADMINISTRATOR

ANICA GRKOVIČ
T +386 1 200 68 03
F +386 1 200 68 53
anica.grkovic@omega-air.si

Languages:

SALES ADMINISTRATOR

MAJA KOKALJ
T +386 1 200 68 07
F +386 1 200 68 53
maja.kokalj@omega-air.si

Languages:

Sales support**SALES MARKETING**

MARKO ŠKULJ
T +386 1 200 68 99
F +386 1 200 68 53
marko.skulj@omega-air.si


Languages:

LOGISTIC & CUSTOMS

NIKA ZORC
T +386 1 200 68 98
F +386 1 200 68 53
nika.zorc@omega-air.si

Languages:

AIR & GAS department - Team

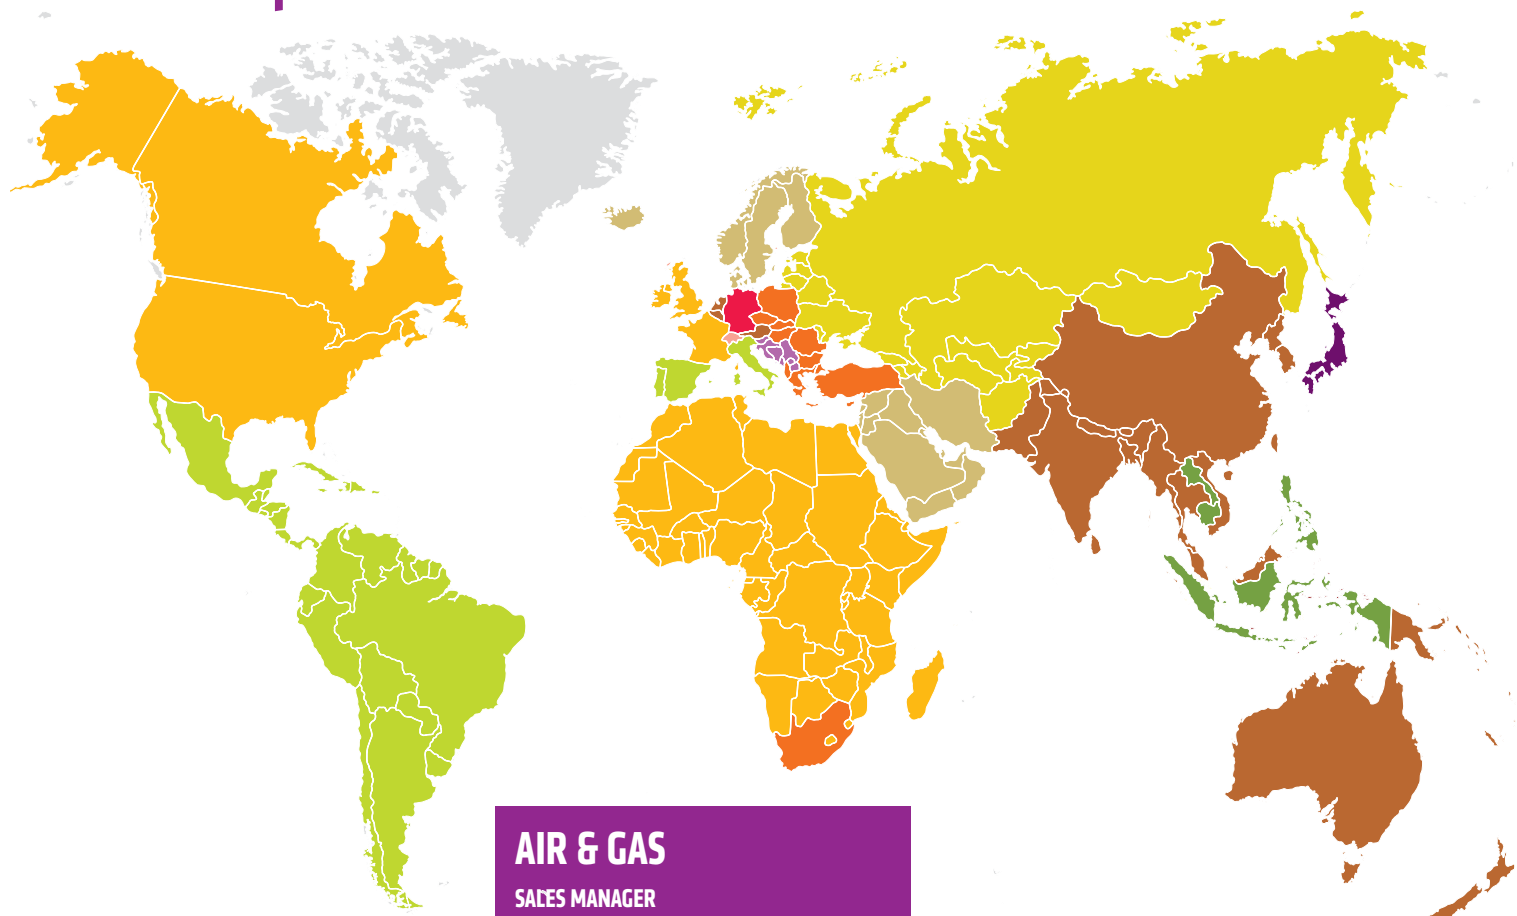

CIS Countries, Baltic

AREA SALES MANAGER



EKATERINA BERNIK
T +386 1 200 68 68
M +386 30 362 192
F +386 1 200 68 50
ekaterina.bernik@omega-air.si

Languages:

SALES ASSISTANT



ŽANNA LAPINA NABERGOJ
T +386 1 200 68 15
M +386 30 478 808
F +386 1 200 68 50
zanna.lapina@omega-air.si

Languages:

SALES ASSISTANT



SABINA KOŽAR
T +386 1 330 42 25
F +386 1 200 68 50
sabina.kozar@omega-air.si

Languages:

SALES ADMINISTRATOR



JANJA BOGATAJ
T +386 1 200 68 04
F +386 1 200 68 50
janja.bogataj@omega-air.si

Language:

AIR & GAS

SALES MANAGER



LUKA TRŠAR
T +386 1 200 68 13
M +386 30 362 190
F +386 1 200 68 50
luka.trsar@omega-air.si

Language:

Benelux, Austria, Asia, Oceania

AREA SALES MANAGER



MARTIN SOJER
T +386 1 200 68 39
M +386 30 362 191
F +386 1 200 68 50
martin.sojer@omega-air.si

Language:

SALES ADMINISTRATOR



TANJA TRŠAR
T +386 1 200 68 43
F +386 1 200 68 50
tanja.trsar@omega-air.si

Language:

SALES ADMINISTRATOR



ANJA ŠAVS
T +386 1 200 68 46
F +386 1 200 68 50
anja.savs@omega-air.si

Language:

France, Canada, USA, Africa, UK

AREA SALES MANAGER



BAPTISTE CALVET
T +386 1 200 68 61
M +386 30 362 197
F +386 1 200 68 50
baptiste.calvet@omega-air.si

Languages:

SALES ASSISTANT



MAJA GRAMPOVČAN
T +386 1 200 68 69
F +386 1 200 68 50
maja.grampovcan@omega-air.si

Sprachen:

SALES ADMINISTRATOR



VESNA PRIJATELJ
T +386 1 200 68 30
F +386 1 200 68 50
vesna.prijatelj@omega-air.si

Languages:

SALES ADMINISTRATOR



GREGORIJ VELKAVRH
T +386 1 330 42 27
F +386 1 200 68 50
gregorij.velkavrh@omega-air.si

Language:

East Europe, Greece, South Africa**AREA SALES MANAGER**

ŠPELA PERC
T +386 1 200 68 69
M +386 30 362 194
F +386 1 200 68 50
spela.perc@omega-air.si

Language:

SALES ADMINISTRATOR

MARTA FURLAN
T +386 1 200 68 19
F +386 1 200 68 50
marta.furlan@omega-air.si

Language:

Middle East, Scandinavia**AREA SALES MANAGER**

UROŠ OGRIN
T +386 1 200 68 38
M +386 30 478 820
F +386 1 200 68 50
uros.ogrin@omega-air.si

Language:

SALES ASSISTANT

VESNA BOŽIDAR
T +386 1 330 42 22
F +386 1 200 68 50
vesna.bozidar@omega-air.si

Language:

OMEGA AIR Japan**AREA SALES MANAGER**

HIRO HANAWA
T +81 (0) 45 228 5118
M +81 (0) 90 5336 0303
hiro.hanawa@jp.omega-air.si

Language:

OMEGA AIR South East Asia**AREA SALES MANAGER**

BRIAN HERBERT
T +62 21 2953 8856
+62 812 9779 0982
brian.herbert@sea.omega-air.si

Language:

OMEGA AIR GMBH - distribution**PROCURATOR**

DR. WALTER STEUDLE
M +49 (0) 173 7142726
walter.steudle@omega-air.de

Languages:

**AREA SALES MANAGER -
NORTH/NORTH-EAST GERMANY**

OLAF LISSEL
T +49 (0) 5341 3988782
M: +49 (0) 172 3900640
olaf.lissel@omega-air.de

Languages:

**AREA SALES MANAGER -
SOUTH GERMANY**

MARCO WINTER
T: +49 (0) 173 305 44 53
marco.winter@omega-air.de

Languages:

Germany (OEM), Switzerland**AREA SALES MANAGER**

NATAŠA ŠTOKEJ
T +386 1 200 68 07
M +386 30 316 871
F +386 1 200 68 50
natasa.stokelj@omega-air.si

Languages:

SALES ASSISTANT

ERIK KRUSEC
T +386 1 200 68 60
M +386 30 362 140
F +386 1 200 68 50
erik.krusec@omega-air.si

Languages:

SALES ASSISTANT

ANDRAŽ MASEL ŠTEMBAL
T +386 1 200 68 25
M +386 30 478 811
F +386 1 200 68 50
andraz.maselstembal@omega-air.si

Languages:

SALES ADMINISTRATOR

ANICA GRKOVIĆ
T +386 1 200 68 03
F +386 1 200 68 50
anica.grkovic@omega-air.si

Languages:

Italy, Spain, Portugal, South America**AREA SALES MANAGER**

TILEN LOVREČIČ
T +386 1 200 68 62
M +386 30 362 180
F +386 1 200 68 50
tilen.lovreccic@omega-air.si

Languages:

SALES ASSISTANT

ROSMERY IDINA MÉNDEZ
T +386 1 200 68 05
M +386 30 478 807
F +386 1 200 68 50
rosmery.idinamendez@omega-air.si

Languages:

SALES ASSISTANT

ANDRES LENARČIČ
T +386 1 200 68 76
F +386 1 200 68 50
andres.lenarccic@omega-air.si

Languages:

SALES ADMINISTRATOR

POLONA ŽAGAR AKYOL
T +386 1 330 42 28
F +386 1 200 68 50
polona.akyol@omega-air.si

Languages:

**Slovenia, Croatia, Serbia, Bosnia and
Herzegovina, Montenegro, FYROM****AREA SALES MANAGER**

GREGOR OSTRONJČ
T +386 1 200 68 22
M +386 30 362 126
gregor.ostronic@omega-air.si

Language:

Vertriebs-Unterstützung**MARKETING**

MARKO ŠKULJ
T +386 1 200 68 99
F +386 1 200 68 50
marko.skulj@omega-air.si

Language:

LOGISTIC & CUSTOMS

NIKA ZORC
T +386 1 200 68 98
F +386 1 200 68 50
nika.zorc@omega-air.si

Language:

OMEGA AIR

Air and Gas



OMEGA AIR d. o. o. Ljubljana

T +386 (0)1 200 68 00

F +386 (0)1 200 68 50

info@omega-air.si

Cesta Dolomitskega odreda 10
SI-1000 Ljubljana, Slovenia
www.omega-air.si

950374 - 8/4/2020

