

# **RC RODCRAFT®**



**TOOLS AND WORKSHOP  
EQUIPMENT 2017-2018**



**QUALITY FOR PROFESSIONALS**

[www.rodcraft.com](http://www.rodcraft.com)

# RODCRAFT

# QUALITY FOR PROFESSIONALS

## One of the world's leading brands

Since 1974, the Rodcraft brand stands for high-quality products and services. Founded in Germany, Rodcraft has grown steadily to become one of the world's leading brands of pneumatic tools and workshop equipment dedicated to the vehicle service and industrial maintenance applications.

## Research and development

Our organisation is constantly investing in research and development, and the Rodcraft product range features many patented designs such as our composite sander and latest impact wrench series.

## Market coverage

With a strong European based sales channel, local sales offices, dedicated distributors and national importers are covering over 80 countries worldwide on a daily basis. We are close to our clients and able to provide fast service and support.

## Testing and quality inspections

To ensure and guarantee long life performance, many strict testing and quality inspections are conducted through the tool and equipment design, production and assembly stages. All products are thoroughly tested at the Technocenter to pass EC certification according to ISO standards and many of the customer centres marketing the Rodcraft product lines are ISO 9001 and ISO 14001 certified.




## Discover the complete Rodcraft range on [www.rodcraft.com](http://www.rodcraft.com)

- online air tools catalogue
- online workshop equipment catalogue
- Rodcraft accessories
- technical documentation
- service centre contacts
- Rodcraft sales and distributor contacts



**Check out today our mobile eCatalog on [m.rodcraft.com](http://m.rodcraft.com)**

**A broad range of pneumatic tools and workshop equipment dedicated to the vehicle service and industrial maintenance applications.**

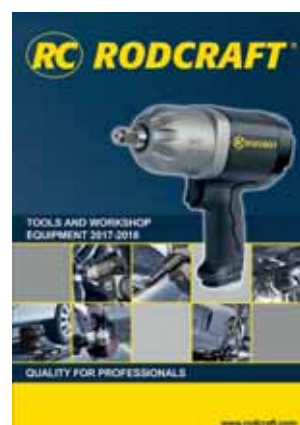

# GLOSSARY



Anvil size



In order to help you select the correct tool we have classified all RODCRAFT tools according to duty levels:  
1 = normal duty | 2 = heavy duty | 3 = very heavy duty | 4 = super heavy duty



Silencing exhaust hose systems, available as accessory



Number of settings for regulating forward power



Working torque



Reverse torque



Air consumption under load per minute



Air consumption at free speed per minute



Possible to be used with balancers because of e.g. suspension bail

AG = outer thread

IG = inner thread

All technical data is based on a tool incoming pressure of max. 6.3 bar (90 psi)  
Norms applied : noise according to ISO15744, vibration 3-axis according to ISO28927-3,

Impact mechanism:

SH = single hammer  
CH = closed hammer

PC = pin clutch

DP = duopact  
TL = torque limited

For more information see page 6



Capacity



Weight



# References

## Important requirements for the use of air tools!

In order to maintain the power of a pneumatic motor, to avoid damage and to prolong the tool's life time the compressed air has to meet certain quality standards. Its recommended to install a maintenance unit at each compressed air outlet or work place.

The following conditions for operation are of great importance and should be observed closely. For each type of work place the correctly suited maintenance unit will produce optimum conditions for the used air tools.

### Air Pressure

The standard pressure of the supplied air should be 6.3 bar (90 psi) at the air entrance of the air tool (also when air is flowing). Air inlet pressures that are too high will lead to accessive wear

and failure of the tool after a while. Tools operating with too low air pressure are usually lacking in their full performance.

### Air Quantity

Depending on the type of air tool the air consumption during full performance may vary. Please compare the max. air consumption values for tools

indicated in our manuals and catalogues, the recommended hose sizes (inner diameter) with the max. flow rates of the maintenance units and the effective capacity of your compressor.

### Condense / Dirt

The water separators and filters which are integrated in our maintenance units avoid corrosion in air motors and supply clean air. A high content of water in the compressed air will lead to rust and

smaller passages in steel pipes and air lines which means air pressure losses and a lack of performance of the air tools. If no filters are used, rust and particles will damage or block the motor.

### Lubrication

Periodical lubrication of air motors is absolutely required (daily) to maintain full performance of the motor, to prolong the life time of the motor and to prevent corrosion. If a motor is not running

with continuous air lubrication (lubricator), it should be lubricated manually every day (approx. 2 cm<sup>3</sup> air oil (model 1000L)). Please see also the drawing for installation in the manual.

### Operating Manuals


Please follow the instructions for maintenance and safe use in the operating manual (drawing for installation).

When a tool is not used according to the requirements for correct operation and air preparation we will not be able to grant any warranty in case of failure.

## Examples of Installation:

Maintenance units without lubricator but with coalescing filter for use with paint guns, blow guns and for oil-free operations.

Maintenance units with lubricator (slim or broad design) for all tools that require permanent lubrication.

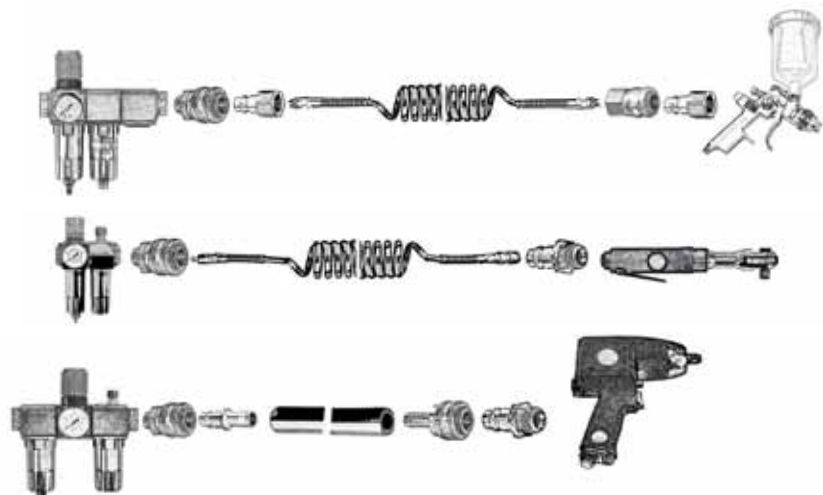

### Duty

In order to help you select the correct tool we classified all RODCRAFT tools according to duty levels:

- ① normal duty      ② heavy duty      ③ very heavy duty      ④ ultra heavy duty

Impact Mechanism

Single Hammer "SH"

Long proven, inexpensive construction with one (two) hammer(s) and grease lubrication.

For all standard assembly work in:

- Hardware and agro-mechanics
- Light industrial sector
- Automotive repair services
- Tyre services



Pin Clutch "PC"

Low vibration impact system with rapid torque increase and economic construction consisting of hardened, turned parts running in a closed impact cage. Lubricated with impact system oil model 1000S (oil bath lubrication - except model 2530 mechanism lubricated with grease)

For all quick assembly work in :

- Tyre services
- Automotive repair services
- Hardware
- Light industrial sector



DUOPACT "DP"

Reliable system for continuous torque increase with two extremely robust, forged ring-hammers. Consisting of surprisingly few parts and having an extremely short design. Lubricated with grease - lubrication from outside partly possible with our Mini Grease Pump model 8150 without opening the housing.

For all extremely intense applications, like :

- Industry
- Tyre services
- Automotive repair services



Closed Hammer System "CH"

This almost maintenance-free running mechanism is dedicated to break loose nuts and bolts without large effort due to its massive closed inertia. The construction is showing a very good weight / power ratio and has typically a short design. The closed construction means that once lubricated, the grease filling stays in place in the hammer for a long period of time.

Typical for:

- Industry
- Truck and bus tyre services and assemblies



Torque Limited "TL"

Please also try our special mechanisms "TL-Torque Limited" for fast and safe pre-tightening for precise final torquing by torque wrench, e.g. tyre services

- Can be found in model: 2263TL

# CONTENT

## 01| Tightening \_\_\_\_\_ 8

- | Impact wrenches
- | Ratchets
- | Gloves
- | Accessories

## 02| Assembly \_\_\_\_\_ 24

- | Screwdrivers

## 03| Drilling \_\_\_\_\_ 28

- | Drills
- | Accessories

## 04| Chipping \_\_\_\_\_ 34

- | Hammers
- | Engravers
- | Scrapers
- | Accessories

## 05| Descaling \_\_\_\_\_ 42

- | Needle scalers
- | Accessories

## 06| Speciality tools \_\_\_\_\_ 46

- | Shears
- | Sheet metal tools
- | Spot welding drills
- | Saws
- | Accessories

## 07| Riveting \_\_\_\_\_ 52

- | Riveters

## 08| Grinding & sanding \_\_\_\_\_ 56

- | Die & angle die grinders
- | Angle grinders
- | Erasers
- | Orbital sanders
- | Belt Sanders
- | Accessories
- | Dust extraction stations

## 09| Polishing \_\_\_\_\_ 76

- | Polishers
- | Accessories

## 10| Car glass removal \_\_\_\_\_ 80

- | Cutters
- | Accessories

## 11| Painting \_\_\_\_\_ 84

- | Painting guns
- | Accessories

## 12| Miscellaneous \_\_\_\_\_ 88

- | Tyre fillers
- | Blow guns
- | Underbody coating guns
- | Grease guns
- | Cartridge guns

## 13| Accessories \_\_\_\_\_ 97

- | Magnetic dishes
- | Maintenance units
- | Air line connectors
- | Hoses
- | Balancers

## 14| Trolley jacks \_\_\_\_\_ 104

## 15| Motor \_\_\_\_\_ 118

## 16| Gear \_\_\_\_\_ 122

## 17| Car body \_\_\_\_\_ 128

## 18| Workshop presses \_\_\_\_\_ 134

## 19| Wheel Dolly \_\_\_\_\_ 140

## 20| Various \_\_\_\_\_ 144

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16

17

18

19

20



RC2277

## 01| Tightening

### | Impact wrenches

- 1/4" Impact wrenches
- 3/8" Impact wrenches
- 1/2" Impact wrenches
- 3/4" Impact wrenches
- 1" Impact wrenches
- 1 1/2" Impact wrenches

### | Ratchets

- 1/4" Ratchets
- 3/8" Ratchets
- 1/2" Ratchets

### | Accessories

- Safety gloves
- Impact sockets

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16

17


18

19

20
















IMPACT WRENCH 1/4" & 3/8"



| Model   | Part#      |
|---------|------------|
| RC2077  | 8951000117 |
| RC2077K | 8951000145 |

| Model  | Part#      |
|--------|------------|
| RC2003 | 8951000195 |
| RC2101 | 8951000196 |

| Model           | RC2077   |                         |
|-----------------|--|-------------------------|
| Anvil           |   | 1/4"                    |
| Working Torque  |   | 40 Nm                   |
| Max Torque      |   | 60 Nm                   |
| Speed           |   | 14000 min <sup>-1</sup> |
| Weight          |   | 0.69 kg                 |
| Hose            |   | 8 mm                    |
| Dimension axbxc |   | 150x140x40 mm           |
| Air cons.       |   | 200 l/min               |
| Air cons.       |   | 390 l/min               |
| Air inlet       |   | 1/4" IG                 |
| Impact system   |   | SINGLE HAMMER           |
| Sound LpA       |   | 87.6 dB(A)              |
| Vibration       |  | 5.92 m/s <sup>2</sup>   |
| 60 Nm max.      |  |                         |
















- 1/4" square drive impact wrench
- 60 Nm in reverse
- Ergonomic handle with injected TPR grip
- One hand forward – reverse switch
- 0,69 Kg – 150 mm length


16 pc 1/4" socket set

| Model   | Part#      |
|---------|------------|
| RC2077K | 8951000145 |

- RC2077
- 1/4" 6 Point impact sockets:  
8 - 9 - 10 - 11 - 12 mm
- 1/4" 50 mm long Torx bits:  
T15 - T20 - T25 - T30 - T40
- 1/4" 50 mm hexagonal bits: 5 - 6 - 8 - 10 mm
- 1/4" square to 1/4" hexagonal adaptor
- 1/4" quick change bit holder




| Model           | RC2003    RC2101   |                         |
|-----------------|--|-------------------------|
| Anvil           |   | 1/4"    3/8"            |
| Working Torque  |   | 60 Nm                   |
| Max Torque      |   | 110 Nm                  |
| Speed           |   | 15000 min <sup>-1</sup> |
| Weight          |   | 0.53 kg                 |
| Hose            |   | 8 mm                    |
| Dimension axbxc |   | 140x.x40 mm             |
| Air cons.       |   | 42 l/min                |
| Air cons.       |   | 174 l/min               |
| Air inlet       |   | 1/4" IG                 |
| Impact system   |   | DOUBLE ROCKING DOG      |
| Sound LpA       |   | 92 dB(A)                |
| Vibration       |  | 4 m/s <sup>2</sup>      |
| 110 Nm max.     |  |                         |



- 140 mm length, provides easier access to hard to reach places
- 1.16 lbs. / 0.53 Kg
- 80 ft.lbs. / 110 Nm in reverse

# IMPACT WRENCH 1/2"



| Model  | Part#      |
|--------|------------|
| RC2177 | 8951000043 |
| RC2267 | 8951000044 |

| Model  | Part#      |
|--------|------------|
| RC2205 | 8951000085 |

| Model  | Part#      |
|--------|------------|
| RC2202 | 8951000123 |

| Model           | RC2177                 | RC2267                  |
|-----------------|------------------------|-------------------------|
| Anvil           | 3/8"                   | 1/2"                    |
| Working Torque  | 420 Nm                 | 480 Nm                  |
| Max Torque      | 580 Nm                 | 660 Nm                  |
| Speed           | 8200 min <sup>-1</sup> | 10200 min <sup>-1</sup> |
| Weight          | 1.25 kg                |                         |
| Hose            | 8 mm                   |                         |
| Dimension axbxc | 164x175x60 mm          |                         |
| Air cons.       | 160 l/min              | 180 l/min               |
| Air cons.       | 470 l/min              | 510 l/min               |
| Air inlet       | 1/4" IG                |                         |
| Impact system   | DUOPACT                |                         |
| Sound LpA       | 90 dB(A)               | 93 dB(A)                |
| Vibration       | 7.9 m/s <sup>2</sup>   | 6.9 m/s <sup>2</sup>    |

580 & 660 Nm max. Composite - Only 1,25 kg

| Model           | RC2205                 |
|-----------------|------------------------|
| Anvil           | 1/2"                   |
| Working Torque  | 406 Nm                 |
| Max Torque      | 580 Nm                 |
| Speed           | 7800 min <sup>-1</sup> |
| Weight          | 2,4 kg                 |
| Hose            | 10 mm                  |
| Dimension axbxc | 150x140x40 mm          |
| Air cons.       | 130 l/min              |
| Air cons.       | 350 l/min              |
| Air inlet       | 1/4" IG                |
| Impact system   | PIN CLUTCH             |
| Sound LpA       | 87,4 dB(A)             |
| Vibration       | 6,71 m/s <sup>2</sup>  |

580 Nm max.

| Model           | RC2202                 |
|-----------------|------------------------|
| Anvil           | 1/2"                   |
| Working Torque  | 420 Nm                 |
| Max Torque      | 610 Nm                 |
| Speed           | 9000 min <sup>-1</sup> |
| Weight          | 1.3 kg                 |
| Hose            | 10 mm                  |
| Dimension axbxc | 112x175x60 mm          |
| Air cons.       | 225 l/min              |
| Air cons.       | 540 l/min              |
| Air inlet       | 1/4" IG                |
| Impact system   | JUMBO HAMMER           |
| Sound LpA       | 95 dB(A)               |
| Vibration       | 12.1 m/s <sup>2</sup>  |

610 Nm max. Only 1,3 kg



- Heavy duty impact wrench
- DUOPACT impact mechanism
- Composite lightweight motor housing
- Well balanced, insulating rubber areas on handle
- Robust F/R shift with 3 positions regulator in forward
- Full power in reverse
- A silencing exhaust hose can be attached



- 1/2" square drive impact wrench
- One hand operation with push-through forward-reverse shift
- 4 positions regulator in forward
- Full power in reverse - 580 Nm max,
- A silencing exhaust hose can be attached
- Rubber protector on front



- 1/2" Ultra compact impact wrench
- 610 Nm maximum torque in reverse
- Steel front cover & Aluminum body
- Length = 112 mm as can size
- Jumbo hammer mechanism
- 3 settings in both directions

## Accessories for 3/8" impacts

| Model  | Part#      |
|--------|------------|
| RS3113 | 8951012354 |

- 3/8" square drive
- 13 pieces

## Accessories for 1/2" impacts

| Model  | Part#      |
|--------|------------|
| RS4114 | 8951012356 |

- 1/2" square drive
- 14 pieces


## Anti scratch protected

| Model   | Part#      |
|---------|------------|
| RS413WP | 8951012362 |



- 85 mm long 1/2" socket
- SW17 / 19 / 21 mm
- Extra thin-walled for alloy rims
- Impact proof chrome-molybdenum quality
- Individual sockets also available

IMPACT WRENCH 1/2"



Model    Part#  
RC2235    8951000286

|                 |  |                        |
|-----------------|--|------------------------|
| Model           |  | RC2235                 |
| Anvil           |  | 1/2"                   |
| Working Torque  |  | 220 Nm                 |
| Max Torque      |  | 300 Nm                 |
| Speed           |  | 7400 min <sup>-1</sup> |
| Weight          |  | 1.85 kg                |
| Hose            |  | 8 mm                   |
| Dimension axbxc |  | 341x80x58 mm           |
| Air cons.       |  | 81 l/min               |
| Air cons.       |  | 408 l/min              |
| Air inlet       |  | 1/4" IG                |
| Impact system   |  | JUMBO HAMMER           |
| Sound LpA       |  | 97 dB(A)               |
| Vibration       |  | 43.5m/s <sup>2</sup>   |
| 300 Nm max.     |  |                        |



- Handle with ergonomic grip
- Full teasing trigger
- Torque selection
- Easy forward reverse selection



Model    Part#  
RC2257    8951000037

|                 |  |                        |
|-----------------|--|------------------------|
| Model           |  | RC2257                 |
| Anvil           |  | 1/2"                   |
| Working Torque  |  | 680 Nm                 |
| Max Torque      |  | 950 Nm                 |
| Speed           |  | 8950 min <sup>-1</sup> |
| Weight          |  | 2.5 kg                 |
| Hose            |  | 10 mm                  |
| Dimension axbxc |  | 213x194x70 mm          |
| Air cons.       |  | 200 l/min              |
| Air cons.       |  | 610 l/min              |
| Air inlet       |  | 1/4" IG                |
| Impact system   |  | DUOPACT                |
| Sound LpA       |  | 94 dB(A)               |
| Vibration       |  | 6.8 m/s <sup>2</sup>   |
| 950 Nm max.     |  |                        |



- 1/2" square drive impact wrench
- One hand operation
- 3+3 position regulator and F/R shift
- 950 Nm max, power in reverse
- A silencing exhaust hose can be attached
- Long handle

Model    Part#  
RC2257K    8951000089

- 1/2" impact set including:
- 1 RC2257 1/2" square drive impact wrench
- 1/2" square drive short impact socket set in case with hex sizes:  
10 / 11 / 12 / 13 / 14 / 15 / 16 / 17 / 18 /  
19 / 21 / 22 / 26 / 27 mm
- Oil bottle
- Hex key for maintenance



Anti scratch protected

Model    Part#  
RS414WP    8951012363

- 85 mm long 1/2" socket
- SW17 / 19 / 21 / 22 mm
- Extra thin-walled for alloy rims
- Impact proof chrome-molybdenum quality
- Individual sockets also available



Model    Part#  
RC2277    8951000025

|                 |  |                        |
|-----------------|--|------------------------|
| Model           |  | RC2277                 |
| Anvil           |  | 1/2"                   |
| Working Torque  |  | 900 Nm                 |
| Max Torque      |  | 1250 Nm                |
| Speed           |  | 8200 min <sup>-1</sup> |
| Weight          |  | 2 kg                   |
| Hose            |  | 10 mm                  |
| Dimension axbxc |  | 194x188x70 mm          |
| Air cons.       |  | 245 l/min              |
| Air cons.       |  | 760 l/min              |
| Air inlet       |  | 1/4" IG                |
| Impact system   |  | DUOPACT                |
| Sound LpA       |  | 93 dB(A)               |
| Vibration       |  | 9.7 m/s <sup>2</sup>   |
| 1250 Nm max.    |  |                        |



- 1/2" square drive impact wrench
- 1250 Nm maximum real torque in reverse
- The Beast Aluminum alloy clutch housing
- Twin hammer mechanism
- Friction ring socket retainer
- Full teasing trigger
- Curved handle with Thermo-Plastic Rubber injected in housing for a durable and comfortable grip, Resistant to most chemicals used in workshops
- NEW power setting system : 1 hand-operation, 1 position in reverse & 3 positions in forward
- 360° swivel air inlet

Model    Part#  
RC2277K    8951000182

- RC2277 Long Protected sockets:  
17 - 19 & 21 mm





|    |
|----|
| 01 |
| 02 |
| 03 |
| 04 |
| 05 |
| 06 |
| 07 |
| 08 |
| 09 |
| 10 |
| 11 |
| 12 |
| 13 |
| 14 |
| 15 |
| 16 |
| 17 |
| 18 |
| 19 |
| 20 |

**DUOPACT  
impact system**

**1250 NM MAX TORQUE**



**Grease nipple  
easy to access**


**High quality, low weight  
composite housing**

**Thermo-plastic-rubber  
coated handle for full grip**

**RC2277**



IMPACT WRENCH 3/4"



| Model  | Part#                  |
|--------|------------------------|
| RC2315 | 8951077130             |
| Model  | Part#                  |
| RC2377 | 8951000045 short anvil |
| RC2387 | 8951000074 long anvil  |

| Model           | RC2315                 |
|-----------------|------------------------|
| Anvil           | 3/4"                   |
| Working Torque  | 1100 Nm                |
| Max Torque      | 1500 Nm                |
| Speed           | 5600 min <sup>-1</sup> |
| Weight          | 4.7 kg                 |
| Hose            | 13 mm                  |
| Dimension axbxc | 242x230x78 mm          |
| Air cons.       | 340 l/min              |
| Air cons.       | 990 l/min              |
| Air inlet       | 3/8" IG                |
| Impact system   | DUOPACT                |
| Sound LpA       | 91.1 dB(A)             |
| Vibration       | 9.97 m/s <sup>2</sup>  |
| 1500 Nm max.    |                        |

| Model           | RC2377 / RC2387                              |
|-----------------|--|
| Anvil           | 3/4"   |
| Working Torque  | 1300 Nm                                      |
| Max Torque      | 1950 Nm                                      |
| Speed           | 5760 min <sup>-1</sup>                       |
| Weight          | 3.5 / 4.1 kg                                 |
| Hose            | 13 mm  |
| Dimension axbxc | RC2377 225x84x199 mm<br>RC2387 300x84x199 mm |
| Air cons.       | 255 l/min                                    |
| Air cons.       | 972 l/min                                    |
| Air inlet       | 3/8" IG                                      |
| Impact system   | DUOPACT                                      |
| Sound LpA       | 96.8 dB(A)                                   |
| Vibration       | 14.5 m/s <sup>2</sup>                        |
| 1950 Nm max.    |  |



- 3/4" square drive impact wrench
- DUOPACT mechanism
- 3 position regulator in forward
- Full power in reverse
- Insulating rubber sleeve on handle



- 3/4" square drive impact wrench
- Injected TPR grip
- 3 positions in forward, full power in reverse
- Great teasing for optimal control
- 1950 Nm max torque
- Composite housing, only 3,5 kg even at this high power level
- Forged DUOPACT mechanism
- Impact mechanism housing made of steel and aluminium
- Swivel air inlet
- Mini grease plug on the front housing

Accessories for 3/4" impacts

| Model | Part#      |
|-------|------------|
| RS618 | 8951012358 |




- 3/4" square drive
- 8 pieces
- (26, 27, 29, 30, 32, 35, 36, 38)

|                      |
|----------------------|
| RC2387               |
| Anvil extension 75mm |





# IMPACT WRENCH 1"



**Model**    **Part#**  
**RC2405**    **8951000075**

**Model**    **Part#**  
**RC2425**    **8951077190** short anvil  
**RC2426**    **8951077032** long anvil

**Model**    **Part#**  
**RC2437-Xi**    **8951000068** short anvil  
**RC2447-Xi**    **8951000069** long anvil

| Model           | RC2405                 |
|-----------------|------------------------|
| Anvil           | 1"                     |
| Working Torque  | 1300 Nm                |
| Max Torque      | 1950 Nm                |
| Speed           | 5760 min <sup>-1</sup> |
| Weight          | 3.6 kg                 |
| Hose            | 13 mm                  |
| Dimension axbxc | 221x84x199 mm          |
| Air cons.       | 255 l/min              |
| Air cons.       | 972 l/min              |
| Air inlet       | 3/8" IG                |
| Impact system   | DUOPACT                |
| Sound LpA       | 96.8 dB(A)             |
| Vibration       | 14.5 m/s <sup>2</sup>  |

1950 Nm max.

| Model           | RC2425 / RC2426                                |
|-----------------|--|
| Anvil           | 1"   |
| Working Torque  | 1715 Nm  |
| Max Torque      | 2450 Nm  |
| Speed           | 3200 min <sup>-1</sup>                         |
| Weight          | 9.4 kg / 10.6 kg                               |
| Hose            | 13 mm  |
| Dimension axbxc | RC2425 312x270x119 mm<br>RC2426 460x270x119 mm |
| Air cons.       | 370 l/min                                      |
| Air cons.       | 1020 l/min                                     |
| Air inlet       | 1/2" IG  |
| Impact system   | SINGLE HAMMER                                  |
| Sound LpA       | 97.9 dB(A)                                     |
| Vibration       | 14.93 m/s <sup>2</sup>                         |

2450 Nm max.

| Model           | RC2437Xi / RC2447Xi                                |
|-----------------|--|
| Anvil           | 1"   |
| Working Torque  | 1900 Nm  |
| Max Torque      | 2700 Nm  |
| Speed           | 6000 min <sup>-1</sup>                             |
| Weight          | 7.2 kg / 8.3 kg                                    |
| Hose            | 13 mm  |
| Dimension axbxc | RC2437Xi 275x158x245 mm<br>RC2447Xi 490x165x190 mm |
| Air cons.       | 360 l/min  |
| Air cons.       | 1100 l/min   |
| Air inlet       | 1/2" IG  |
| Impact system   | DUOPACT  |
| Sound LpA       | 100.8 dB(A)  |
| Vibration       | 10.7 m/s <sup>2</sup>                              |

2700 Nm max.



- 1" square drive impact wrench
- Injected TPR grip
- 3 positions in forward, full power in reverse
- Great teasing for optimal control
- 1950 Nm max torque
- Composite housing, only 3,38 kg even at this high power level
- Forged DUOPACT mechanism
- Impact mechanism housing made of steel and aluminum
- Swivel air inlet
- Mini grease plug on the front housing



- 1" square drive impact wrench
- 3+3 position regulator incorporating F/R shift
- 2450 Nm max, power in reverse
- A silencing exhaust hose can be attached
- Rubber protector on front



**RODCRAFT Premium**



- 1" square drive impact wrench
- Injected TPR grip
- 3 steps forward and 2 steps in reverse
- Ergonomic trigger with great teasing for optimal control
- 2700 Nm max torque
- Composite housing, only 7,2 kg even at this high power level
- Fast and high torque with forged DUOPACT mechanism

**Model**    **Part#**  
**RDP10**    **8951011021**

- Digital tyre gauge
- perfect for your coat pocket
- LCD display
- effective range up to 10 bar/150 psi
- Display in bar or psi




**RC2426**  
**with long anvil**  
**(152 mm)**



**RC2447Xi**  
**with long anvil**  
**(152 mm)**





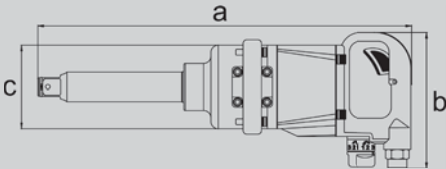










IMPACT WRENCH 1"















**Model**    **Part#**  
**RC2466**    8951000047 short anvil  
**RC2476**    8951000048 long anvil

**Model**    **Part#**  
**RC2457Xi**    8951000135 short anvil  
**RC2477Xi**    8951000046 long anvil














**Model**    **Part#**  
**RC2444**    8951077210

| Model          | RC2466 / RC2476  |                        |
|----------------|--|------------------------|
| Anvil          |   | 1"                     |
| Working Torque |   | 2000 Nm                |
| Max Torque     |   | 2900 Nm                |
| Speed          |   | 5150 min <sup>-1</sup> |
| Weight         |   | 10.1 kg / 11.6 kg      |
| Hose           |   | 13 mm                  |
| Dimension      |   | RC2466 370x186x130 mm  |
| axbxc          |  | RC2476 520x186x130 mm  |
| Air cons.      |   | 370 l/min              |
| Air cons.      |   | 1150 l/min             |
| Air inlet      |   | 1/2" IG                |
| Impact system  |   | CLOSED HAMMER          |
| Sound LpA      |   | 100 dB(A)              |
| Vibration      |  | 6.5 m/s <sup>2</sup>   |

2900 Nm max.

| Model          | RC2457Xi / RC2477Xi  |                         |
|----------------|--|-------------------------|
| Anvil          |   | 1"                      |
| Working Torque |   | 2000 Nm                 |
| Max Torque     |   | 2900 Nm                 |
| Speed          |   | 5900 min <sup>-1</sup>  |
| Weight         |   | 7.2 kg / 8.1 kg         |
| Hose           |   | 13 mm                   |
| Dimension      |   | RC2457Xi 337x165x190 mm |
| axbxc          |  | RC2477Xi 490x165x89 mm  |
| Air cons.      |   | 300 l/min               |
| Air cons.      |   | 920 l/min               |
| Air inlet      |   | 1/2" IG                 |
| Impact system  |   | DUOPACT                 |
| Sound LpA      |   | 106 dB(A)               |
| Vibration      |  | 9.8 m/s <sup>2</sup>    |

2900 Nm max.

| Model          | RC2444   |   |
|----------------|--|---|
| Anvil          |   | 1"  |
| Working Torque |   | 2450 Nm   |
| Max Torque     |   | 3500 Nm   |
| Speed          |   | 2700 min <sup>-1</sup>  |
| Weight         |   | 14.6 kg   |
| Hose           |   | 13 mm   |
| Dimension      |   | axbxc 325x300x121 mm  |
| Air cons.      |  |  |
| Air cons.      |   | 1120 l/min  |
| Air inlet      |   | 3/8" IG   |
| Impact system  |   | CLOSED HAMMER   |
| Sound LpA      |   | 104 dB(A)   |
| Vibration      |  | 9.17 m/s <sup>2</sup>   |

3500 Nm max.



- 1" heavy duty impact wrench
- Extremely durable CLOSED HAMMER SYSTEM
- 3+3 position regulator incorporating F/R shift
- 2900 Nm max, power in reverse

**RC2476**  
with long anvil  
(152 mm)



- 1" super power impact wrench
- Lightweight motor housing
- Long anvil
- DUOPACT mechanism
- Very slim front - diameter 89 mm
- 3+3 position regulator incorporating F/R shift
- 2900 Nm max, power in reverse
- Ergonomic and insulating rubber areas on handles
- Rubber cover on the motor housing

**RC2477Xi**  
with long anvil  
(152 mm)



- 1" super power impact wrench
- Extremely durable CLOSED HAMMER SYSTEM
- 4+4 position regulator and F/R shift
- 3500 Nm max, power in reverse


Accessories for 1" impacts

**Model**    **Part#**  
**RS818**    8951012360





- 1" square drive
- 8 pieces  
(26, 27, 29, 30, 32, 35, 36, 38)

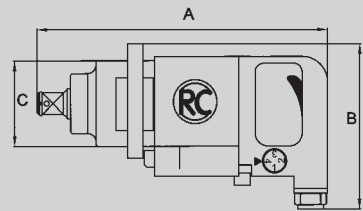IMPACT WRENCH 1 1/2"



Model      Part#  
 RC2530    8951077260

|                 |  |                        |
|-----------------|--|------------------------|
| Model           |  | RC2530                 |
| Anvil           |   | 1 1/2"                 |
| Working Torque  |   | 4200 Nm                |
| Max Torque      |   | 5500 Nm                |
| Speed           |   | 3600 min <sup>-1</sup> |
| Weight          |   | 17.7 kg                |
| Hose            |   | 19 mm                  |
| Dimension axbxc |   | 520x190x123 mm         |
| Air cons.       |   | 600 l/min              |
| Air cons.       |   | 1800 l/min             |
| Air inlet       |   | 1/2" IG                |
| Impact system   |   | PIN CLUTCH             |
| Sound LpA       |   | 97.1 dB(A)             |
| Vibration       |  | 14.62 m/s <sup>2</sup> |
| 5500 Nm max.    |  |                        |




- 1 1/2" extreme power impact wrench with 4+4 position regulator and F/R shift
- 5500 Nm max. power in reverse













Impact Wrench Tune up Kit

| Model     | Part#      |
|-----------|------------|
| RC2277    | 8950280018 |
| RC2177    | 8950280024 |
| RC2177    | 8950280024 |
| RC2267    | 8950280024 |
| RC2466    | 8950280028 |
| RC2235    | 8950280081 |
| RC2257 DP | 8950280034 |
| RC2477XI  | 8950280038 |
| RC2457XI  | 8950280038 |
| RC2377    | 8950280043 |
| RC2387    | 8950280043 |
| RC2405    | 8950280043 |
| RC2205    | 8950280050 |
| RC2437XI  | 8950280055 |
| RC2447XI  | 8950280055 |
| RC2077    | 8950280058 |
| RC2277    | 8950280059 |
| RC2202    | 8940171649 |

RACHETS 1/4"













Model    Part#  
RC3000   8951078012

|                  |  |                       |
|------------------|--|-----------------------|
| Model            |  | RC3000                |
| Anvil            |   | 1/4"                  |
| Torque M         |   | 20 Nm                 |
| Torque Mmax      |   | 30 Nm                 |
| Speed            |   | 230 min <sup>-1</sup> |
| Weight           |   | 0.55 kg               |
| Hose             |   | 8 mm                  |
| Dimensions axbxc |   | 180x35x31 mm          |
| Air cons.        |   | 100 l/min             |
| Air cons.        |   | 300 l/min             |
| Air inlet        |   | 1/4" IG               |
| Sound LpA        |   | 81.2 dB(A)            |
| Vibration        |  | 3.91 m/s <sup>2</sup> |
| Motor 30 Nm max. |  |                       |



- 1/4" ratchet
- Length only 180 mm
- Rear exhaust












Model    Part#  
RC3001   8951078022

|                  |  |                       |
|------------------|--|-----------------------|
| Model            |  | RC3001                |
| Anvil            |   | 1/4"                  |
| Torque M         |   | 25 Nm                 |
| Torque Mmax      |   | 30 Nm                 |
| Speed            |   | 270 min <sup>-1</sup> |
| Weight           |   | 0.44 kg               |
| Hose             |   | 8 mm                  |
| Dimensions axbxc |   | 140x35x30 mm          |
| Air cons.        |   | 115 l/min             |
| Air cons.        |   | 490 l/min             |
| Air inlet        |   | 1/4" IG               |
| Sound LpA        |   | 91.8 dB(A)            |
| Vibration        |  | 3.49 m/s <sup>2</sup> |
| Only 140 mm      |  |                       |



- 1/4" mini-ratchet for use in confined areas
- Anti-slip coated handle
- Rear exhaust













Model    Part#  
RC3060   8951078062

|                              |  |                       |
|------------------------------|--|-----------------------|
| Model                        |  | RC3060                |
| Anvil                        |   | 1/4"                  |
| Torque M                     |   | 20 Nm                 |
| Torque Mmax                  |   | 45 Nm                 |
| Speed                        |   | 250 min <sup>-1</sup> |
| Weight                       |   | 0.65 kg               |
| Hose                         |   | 8 mm                  |
| Dimensions axbxc             |   | 205x42x32 mm          |
| Air cons.                    |   | 65 l/min              |
| Air cons.                    |   | 200 l/min             |
| Air inlet                    |   | 1/4" IG               |
| Sound LpA                    |   | 89.3 dB(A)            |
| Vibration                    |  | 2.89 m/s <sup>2</sup> |
| Closed head Motor 45 Nm max. |  |                       |



- 1/4" ratchet
- Flat, small ratchet head (32 mm) for confined areas
- Closed head design with 2 grease nipples for easy maintenance
- Pivotal air outlet, keeps air away from work
- Insulated handle

Model RC3005  
Part# 8951078042

|                  |   |                       |
|------------------|---|-----------------------|
| Model            |   | RC3005                |
| Anvil            |  | 3/8"                  |
| Torque M         |  | 20 Nm                 |
| Torque Mmax      |  | 30 Nm                 |
| Speed            |  | 230 min <sup>-1</sup> |
| Weight           |  | 0.55 kg               |
| Hose             |  | 8 mm                  |
| Dimensions axbxc |  | 180x35x33 mm          |
| Air cons.        |  | 100 l/min             |
| Air cons.        |  | 300 l/min             |
| Air inlet        |  | 1/4" IG               |
| Sound LpA        |  | 85.5 dB(A)            |
| Vibration        |  | 4.29 m/s <sup>2</sup> |
| Motor 30 Nm max. |   |                       |



- 3/8" ratchet
- Length only 180 mm
- Rear exhaust













Model RC3010  
Part# 8951078013

|                  |   |                       |
|------------------|---|-----------------------|
| Model            |   | RC3010                |
| Anvil            |  | 3/8"                  |
| Torque M         |  | 20 Nm                 |
| Torque Mmax      |  | 30 Nm                 |
| Speed            |  | 230 min <sup>-1</sup> |
| Weight           |  | 0.55 kg               |
| Hose             |  | 8 mm                  |
| Dimensions axbxc |  | 205x35x33 mm          |
| Air cons.        |  | 100 l/min             |
| Air cons.        |  | 300 l/min             |
| Air inlet        |  | 1/4" IG               |
| Sound LpA        |  | 84.2 dB(A)            |
| Vibration        |  | 4.08 m/s <sup>2</sup> |
| Motor 30 Nm max. |   |                       |



- 3/8" ratchet
- Length only 205 mm
- Rear exhaust

Model RC3260  
Part# 8951078033

|                  |   |                       |
|------------------|---|-----------------------|
| Model            |   | RC3260                |
| Anvil            |  | 3/8"                  |
| Torque M         |  | 20 Nm                 |
| Torque Mmax      |  | 45 Nm                 |
| Speed            |  | 250 min <sup>-1</sup> |
| Weight           |  | 0.65 kg               |
| Hose             |  | 8 mm                  |
| Dimensions axbxc |  | 205x42x34 mm          |
| Air cons.        |  | 65 l/min              |
| Air cons.        |  | 200 l/min             |
| Air inlet        |  | 1/4" IG               |
| Sound LpA        |  | 92.5 dB(A)            |
| Vibration        |  | 3.23 m/s <sup>2</sup> |
| Motor 45 Nm max. |   |                       |



- 3/8" ratchet
- Flat, small ratchet head (32 mm) for confined areas
- Closed head design with 2 grease nipples for easy maintenance
- Pivotal air outlet, keeps air away from work
- Insulated handle

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16

17


18

19





20



RATCHETS 3/8" & 1/2"






Model    Part#  
RC3200   8951078023

|                  |  |                       |
|------------------|--|-----------------------|
| Model            |  | RC3200                |
| Anvil            |   | 3/8"                  |
| Torque M         |   | 40 Nm                 |
| Torque Mmax      |   | 60 Nm                 |
| Speed            |   | 160 min <sup>-1</sup> |
| Weight           |   | 1.2 kg                |
| Hose             |   | 8 mm                  |
| Dimensions axbxc |   | 255x47x42 mm          |
| Air cons.        |   | 170 l/min             |
| Air cons.        |   | 465 l/min             |
| Air inlet        |   | 1/4" IG               |
| Sound LpA        |   | 90.8 dB(A)            |
| Vibration        |  | 3.39 m/s <sup>2</sup> |
| Motor 60 Nm max. |  |                       |



- 3/8" standard ratchet
- Front exhaust
- Good handle grip













Model    Part#  
RC3100   8951078004

|                  |  |                       |
|------------------|--|-----------------------|
| Model            |  | RC3100                |
| Anvil            |   | 1/2"                  |
| Torque M         |   | 40 Nm                 |
| Torque Mmax      |   | 60 Nm                 |
| Speed            |   | 160 min <sup>-1</sup> |
| Weight           |   | 1.2 kg                |
| Hose             |   | 8 mm                  |
| Dimensions axbxc |   | 255x47x46 mm          |
| Air cons.        |   | 170 l/min             |
| Air cons.        |   | 465 l/min             |
| Air inlet        |   | 1/4" IG               |
| Sound LpA        |   | 93.2 dB(A)            |
| Vibration        |  | 4.14 m/s <sup>2</sup> |
| Motor 60 Nm max. |  |                       |












- 1/2" standard ratchet
- Front exhaust
- Good handle grip

Model    Part#  
RC3600   8951078034

|                  |  |                       |
|------------------|--|-----------------------|
| Model            |  | RC3600                |
| Anvil            |   | 1/2"                  |
| Torque M         |   | 60 Nm                 |
| Torque Mmax      |   | 90 Nm                 |
| Speed            |   | 170 min <sup>-1</sup> |
| Weight           |   | 1.25 kg               |
| Hose             |   | 8 mm                  |
| Dimensions axbxc |   | 275x43x49 mm          |
| Air cons.        |   | 170 l/min             |
| Air cons.        |   | 460 l/min             |
| Air inlet        |   | 1/4" IG               |
| Sound LpA        |   | 85.4 dB(A)            |
| Vibration        |  | 4.95 m/s <sup>2</sup> |
| Motor 90 Nm max. |  |                       |















- Proven 1/2" air ratchet
- Rear exhaust
- Motor housing with its flattened sides has a perfect grip to allow good control of the tool

|                           |   |                       |
|---------------------------|---|-----------------------|
| Model                     |   | RC3607                |
| Anvil                     |    | 1/2"                  |
| Torque M                  |    | 60 Nm                 |
| Torque Mmax               |    | 90 Nm                 |
| Speed                     |    | 170 min <sup>-1</sup> |
| Weight                    |    | 1.25 kg               |
| Hose                      |    | 8 mm                  |
| Dimensions axbxc          |    | 270x44x49 mm          |
| Air cons.                 |    | 170 l/min             |
| Air cons.                 |    | 460 l/min             |
| Air inlet                 |    | 1/4" IG               |
| Sound LpA                 |    | 88.2 dB(A)            |
| Vibration                 |  | 4.32 m/s <sup>2</sup> |
| Motor 90 Nm max. Composit |   |                       |



- 1/2" air ratchet
- Ergonomic and powerful ratchet
- Cold-insulating composite handle
- Start lever sinks snugly into housing
- Simple to re-grease
- Rear exhaust

|                                  |   |                       |
|----------------------------------|---|-----------------------|
| Model                            |   | RC3700                |
| Anvil                            |    | 1/2"                  |
| Torque M                         |    | 130 Nm                |
| Torque Mmax                      |    | 130 Nm (250H) Nm      |
| Speed                            |    | 320 min <sup>-1</sup> |
| Weight                           |    | 1.6 kg                |
| Hose                             |    | 8 mm                  |
| Dimensions axbxc                 |    | 312x52x52 mm          |
| Air cons.                        |    | 130 l/min             |
| Air cons.                        |    | 830 l/min             |
| Air inlet                        |    | 1/4" IG               |
| Sound LpA                        |    | 92 dB(A)              |
| Vibration                        |  | 3.19 m/s <sup>2</sup> |
| Motor 130 Nm (250H) max. DuoPawl |   |                       |



- 1/2" ratchet with 130 Nm motor power - by hand you can torque up to 250 Nm similar to using a spanner
- DUO-PAWL double ratchet pawl mechanism with 3-point-spring suspension for extreme torque and smooth operation with symmetrical blocking system
- Cold and vibration insulated handle
- Swiveling exhaust ring avoiding any disturbance from the exhausted air flow



Standard sockets in sets

Standard sockets with hex key, impact proof chrome-molybdenum quality, easy-to-read laser etched marking on each socket with model no. and key size

| 3/8" square | content size of hex mm                          | Part#      |
|-------------|---|------------|
| RS3113      | 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 | 8951012354 |



| 1/4" square  | Part#      |
|--|------------|
| 6 Point impact sockets<br>8, 9, 10, 11, 12 mm            |            |
| 1/4" 50 mm long Torx bits<br>T15 - T20 - T25 - T30 - T40 |            |
| 1/4" 50 mm hexagonal bits:<br>5 - 6 - 8 - 10 mm          | 8951000146 |
| 1/4" square<br>to 1/4" hexagonal adaptor                 |            |
| 1/4" quick change bit<br>holder                          |            |



| 1/2" square |   |
|-------------|---|
| RS4114      | 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 26, 27 8951012356 |

| 3/4" square |   |
|-------------|---|
| RS618       | 26, 27, 29, 30, 32, 35, 36, 38 8951012358 |

| 1" square |   |
|-----------|---|
| RS818     | 27, 30, 32, 33, 35, 36, 38, 41 8951012360 |

Deep sockets in sets

Deep sockets with hex key, for hard to reach areas

| 1/2" square |   |
|-------------|---|
| RS4114D     | 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 26, 27 8951012357 |
| RS413DTW    | 17, 19, 21 8951012353   |

| 3/4" square |   |
|-------------|---|
| RS618D      | 26, 27, 29, 30, 32, 35, 36, 38 8951012359 |

| 1" square |                          |
|-----------|--------------------------|
| RS814D    | 27,32 ,33, 36 8951012361 |



Individual deep sockets

Individual pieces of the most common sockets in the vehicle service business

| 1/2" square | content size of hex mm | Part#      |
|-------------|------------------------|------------|
| R417MD      | 17                     | 8951012364 |
| R419MD      | 19                     | 8951012365 |
| R421MD      | 21                     | 8951012366 |
| 1" square   |                        |            |
| R833MD      | 33                     | 8951012370 |



## Anti scratch

Sockets with hex key, with anti-scratch protection, extra thin-walled for alloy rims, painted rims and polished cap nuts, impact proof chrome-molybdenum quality, easy-to-read marking on each socket with key size. Options with 80 mm (deep) and 130 mm (long) for sports cars

**Model** Part#  
**RS413WP** 8951012362 (length 80 mm)



| Model   | content size of hex mm |
|---------|------------------------|
| RS413WP | 17, 19, 21             |

**Model** Part#  
**RS414WP** 8951012363  
Similar features to the RS413WP (length 80 mm)



| Model   | content size of hex mm |
|---------|------------------------|
| RS414WP | 17, 19, 21, 22         |

**Model** Part#  
**RS413LWP** 8951000054  
Similar features to the RS413WP but length 130 mm



| Model    | content size of hex mm |
|----------|------------------------|
| RS413LWP | 17, 19, 21             |

Individual pieces of the most common sockets in the tyre changing business

| Model   | Length        | Part#      |
|---------|---------------|------------|
| R417MWP | short L=85 mm | 8951012372 |
| R417LWP | long L=130 mm | 8955000051 |
| R419MWP | short L=85 mm | 8951012373 |
| R419LWP | long L=130 mm | 8955000052 |
| R421MWP | short L=85 mm | 8951012374 |
| R421LWP | long L=130 mm | 8955000053 |

| Model   |                                 | Part#      |
|---------|---------------------------------|------------|
| KSW21LK | PVC-sleeve for R421MWP (10 pcs) | 8951011404 |
| KSW22LK | PVC-sleeve for R422MWP (10 pcs) | 8951011405 |



## 1/2" Torsion

**Model** Part#  
**RS435B** 8951012378

Torsion bars with both ends 1/2" square drive (male and female), total length 194 mm



| Model  | data on bar (colour)                                  |                                  |
|--------|---|----------------------------------|
| RS435B | 100 Nm (black),<br>120 Nm (white),<br>150 Nm (orange) | 110 Nm (blue),<br>135 Nm (grey), |

## 1/2" Inbus

**Model** Part#  
**RS438A** 8951012376

Special sockets with hexagonal (Allen, Inbus) male key ends - indispensable for many vehicle applications like truck doors, covers etc. - length 79 mm



| Model  | shape and size                      |
|--------|-------------------------------------|
| RS438A | H6, H7, H8, H10, H12, H14, H17, H19 |

## 1/2" Torx

**Model** Part#  
**RS438T** 8951012377

Special sockets with Star tip (TORX) male key ends - indispensable for many vehicle applications like truck doors, covers etc. - length 79 mm



| Model  | shape and size                    |
|--------|-----------------------------------|
| RS438T | T25, T27, T30, T40, T45, T55, T60 |

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16

17

18

19

20



**RC4784**



## 02| Assembly

- | Screwdrivers
  - Straight screwdrivers
  - Pistol screwdrivers

01

**02**

03

04

05

06

07

08

09

10

11

12

13

14

15

16


17

18

19

20


SCREWDRIVER



Model     Part#  
RC4784   8951073023

|                  |  |                        |
|------------------|--|------------------------|
| Model            |  | RC4784                 |
| Min Torque       |  | 1 Nm                   |
| Max Torque       |  | 6 Nm                   |
| Bit Drive        |  | 1/4" Fem.Hex QC        |
| Adjustment       |  | External               |
| Speed            |  | 1770 rpm               |
| Weight           |  | 0,92 kg                |
| Hose             |  | 8 mm                   |
| Dimensions axbxc |  | 165x160x45 mm          |
| Air cons. ave.   |  | 440 l/min              |
| Air cons.        |  | 595 l/min              |
| Air inlet        |  | 1/4" IG                |
| Clutch Type      |  | Roller*                |
| Sound LpA        |  | 80.3 dB(A)             |
| Vibration        |  | < 2,5 m/s <sup>2</sup> |

6 Nm external adjustment



- Lightweight thanks to composite material
- Ergonomic rubber handle
- Precise adjustable speed up to 1770 rpm
- Also for use with balancer
- The tool offers 3 possible connections to compressed air supply
- To use upper or side air inlet pls. use model AR1 or regulateable swivel joint DG1R for regulating incoming air
- Quick coupler for screw driver bits
- Forward / reverse switch

- \*R: shut-off by slip clutch  
- D: motorstart per push button and proof

Model     Part#  
RC4760   8951073012

|                  |  |                        |
|------------------|--|------------------------|
| Model            |  | RC4760                 |
| Min Torque       |  | 1 Nm                   |
| Max Torque       |  | 7 Nm                   |
| Bit Drive        |  | 1/4" Fem.Hex QC        |
| Adjustment       |  | Internal               |
| Speed            |  | 2000 rpm               |
| Weight           |  | 1,10 kg                |
| Hose             |  | 8 mm                   |
| Dimensions axbxc |  | 242x42 mm              |
| Air cons. ave.   |  | 350 l/min              |
| Air cons.        |  | 470 l/min              |
| Air inlet        |  | 1/4" IG                |
| Clutch Type      |  | Roller                 |
| Sound LpA        |  | 88.7 dB(A)             |
| Vibration        |  | < 2,5 m/s <sup>2</sup> |

7 Nm inner adjustment



- Large straight tool, for fast assembly
- Easy to reach forward/reverse shift which can be locked in reverse for longer disassemblies
- Quick coupler for screw driver bits
- Forward / reverse switch


Model     Part#  
RC4700   8951073002

|                  |  |                        |
|------------------|--|------------------------|
| Model            |  | RC4700                 |
| Min Torque       |  | 1 Nm                   |
| Max Torque       |  | 7 Nm                   |
| Bit Drive        |  | 1/4" Fem.Hex QC        |
| Adjustment       |  | Internal               |
| Speed            |  | 2100 rpm               |
| Weight           |  | 1,15 kg                |
| Hose             |  | 8 mm                   |
| Dimensions axbxc |  | 210x150x42 mm          |
| Air cons. ave.   |  | 430 l/min              |
| Air cons.        |  | 585 l/min              |
| Air inlet        |  | 1/4" IG                |
| Clutch Type      |  | Roller                 |
| Sound LpA        |  | 88.6 dB(A)             |
| Vibration        |  | < 2,5 m/s <sup>2</sup> |

7 Nm inner adjustment



- Popular short screwdriver
- High speed
- Quick coupler for screw driver bits
- Forward / reverse switch



# The right tool for your needs !

Simple setting of the  
shut-off torque from  
outside on front ring

Hanger for balancer

Composite housing  
with insulating  
rubber handle

Practical thumb  
switch for  
forward / reverse

Silenced / down  
handle exhaust

## RC4784

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16

17

18

19

20



RC4607

## 03| Drilling

### | Drills

- 6,5 mm drills
- 10 mm drills
- 13 mm drills

### | Accessories

- Key chucks
- Keyless chucks

01

02

**03**

04

05

06

07

08

09

10

11

12

13

14

15

16


17

18

19


20

DRILLS 6,5 & 10 MM



Model    Part#  
RC4105    8951073001

|                          |  |                       |
|--------------------------|--|-----------------------|
| Model                    |  | RC4105                |
| Drill diam.              |  | 6.5 mm                |
| Power                    |  | 180 W                 |
| Speed                    |  | 3000 rpm              |
| Weight                   |  | 0.58 kg               |
| Hose                     |  | 8 mm                  |
| Dimensions axbxc         |  | 165x160x38 mm         |
| Air cons. ave.           |  | 330 l/min             |
| Air cons.                |  | 440 l/min             |
| Air inlet                |  | 1/4" IG               |
| Sound LpA                |  | 71.3 dB(A)            |
| Vibration                |  | 3.24 m/s <sup>2</sup> |
| Reverse switch Composite |  |                       |



- Ergonomic and lightweight drill with 6,5 mm key-chuck
- Insulating composite handle with rubber grip
- Precise to regulate the speed
- Well suited for use with balancers/hose balancers due to its 3 connecting possibilities for compressed air supply

Model    Part#  
RC4100    8951073000


|                  |  |                       |
|------------------|--|-----------------------|
| Model            |  | RC4100                |
| Drill diam.      |  | 10 mm                 |
| Power            |  | 500 W                 |
| Speed            |  | 2200 rpm              |
| Weight           |  | 0.95 kg               |
| Hose             |  | 8 mm                  |
| Dimensions axbxc |  | 193x132x42 mm         |
| Air cons. ave.   |  | 350 l/min             |
| Air cons.        |  | 470 l/min             |
| Air inlet        |  | 1/4" IG               |
| Sound LpA        |  | 86.7 dB(A)            |
| Vibration        |  | 3.19 m/s <sup>2</sup> |
| Only forward     |  |                       |



- Handy drill with short design
- Including a RÖHM® - quick chuck up to 10 mm (3/8")

Model    Part#  
RC4107    8951073011

|                          |  |                       |
|--------------------------|--|-----------------------|
| Model                    |  | RC4107                |
| Drill diam.              |  | 10 mm                 |
| Power                    |  | 380 W                 |
| Speed                    |  | 2200 rpm              |
| Weight                   |  | 0.93 kg               |
| Hose                     |  | 8 mm                  |
| Dimensions axbxc         |  | 220x100x50 mm         |
| Air cons. ave.           |  | 480 l/min             |
| Air cons.                |  | 650 l/min             |
| Air inlet                |  | 1/4" IG               |
| Sound LpA                |  | 81.3 dB(A)            |
| Vibration                |  | 3.06 m/s <sup>2</sup> |
| Reverse switch Composite |  |                       |



- Ergonomic and lightweight tool with anti-slip rubber patches
- Precise adjustable speed for cautious start-ups
- Silenced
- Well suited for use with balancers/hose
- Balancers due to its 3 connecting possibilities for compressed air supply.
- Equipped with high quality key-less chuck from "RÖHM®"

Balancers


Model    Part#  
RC9311    8951011260



- Capacity 0,4 to 1 kg
- Stroke 1600 mm



DRILLS 10 MM



Model RC4500  
Part# 8951073021

Model RC4607  
Part# 8951073090

|                  |  |               |
|------------------|--|---------------|
| Model            |  | RC4500        |
| Drill diam.      |  | 10 mm         |
| Power            |  | 500 W         |
| Speed            |  | 2000 rpm      |
| Weight           |  | 1.15 kg       |
| Hose             |  | 8 mm          |
| Dimensions axbxc |  | 192x152x42 mm |
| Air cons. ave.   |  | 460 l/min     |
| Air cons.        |  | 620 l/min     |
| Air inlet        |  | 1/4" IG       |
| Sound LpA        |  | 92.7 dB(A)    |
| Vibration        |  | 3.16 m/s²     |
| Reverse switch   |  |               |



- Compact tool with forward/reverse switch on handle
- Equipped with RÖHM®-quick chuck up to 10 mm (3/8").

|                  |  |              |
|------------------|--|--------------|
| Model            |  | RC4607       |
| Drill diam.      |  | 10 mm        |
| Power            |  | 500 W        |
| Speed            |  | 2000 rpm     |
| Weight           |  | 1.00 kg      |
| Hose             |  | 8 mm         |
| Dimensions axbxc |  | 225x40x42 mm |
| Air cons. ave.   |  | 380 l/min    |
| Air cons.        |  | 510 l/min    |
| Air inlet        |  | 1/4" IG      |
| Sound LpA        |  | 81.3 dB(A)   |
| Vibration        |  | 3.37 m/s²    |
| Composite        |  |              |



- High quality drill with double front bearing
- 3-planet-gear
- Down-handle exhaust with muffler
- Equipped with 10 mm (3/8") quality RÖHM®- quick key-less chuck
- Cold-insulating composite handle



Balancers

Model RC9312  
Part# 8951011261



- Capacity 1 to 2kg
- Stroke 1600 mm

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16


17

18



19

20

DRILLS 10 & 13 MM



Model    Part#  
RC4650   8951073050

|                  |   |                       |
|------------------|---|-----------------------|
| Model            |   | RC4650                |
| Drill diam.      |  | 10 mm                 |
| Power            |  | 500 W                 |
| Speed            |  | 1500 rpm              |
| Weight           |  | 1.10 kg               |
| Hose             |  | 8 mm                  |
| Dimensions axbxc |  | 210x42x84 mm          |
| Air cons. ave.   |  | 330 l/min             |
| Air cons.        |  | 450 l/min             |
| Air inlet        |  | 1/4" IG               |
| Sound LpA        |  | 89.9 dB(A)            |
| Vibration        |  | 3.14 m/s <sup>2</sup> |
| Reverse switch   |   |                       |



- Slim tool with 84 mm height
- With RÖHM® - key chuck up to 10 mm (3/8")

Model    Part#  
RC4550   8951073031

|                  |   |                       |
|------------------|---|-----------------------|
| Model            |   | RC4550                |
| Drill diam.      |  | 13 mm                 |
| Power            |  | 500 W                 |
| Speed            |  | 800 rpm               |
| Weight           |  | 1.40 kg               |
| Hose             |  | 8 mm                  |
| Dimensions axbxc |  | 220x150x42 mm         |
| Air cons. ave.   |  | 430 l/min             |
| Air cons.        |  | 585 l/min             |
| Air inlet        |  | 1/4" IG               |
| Sound LpA        |  | 91.9 dB(A)            |
| Vibration        |  | 4.51 m/s <sup>2</sup> |
| Reverse switch   |   |                       |



- Reversible 13 mm (1/2") drill
- Double 3-planet-gear
- Double front bearing for tough applications
- With precise RÖHM® - quick key-less chuck
- Detachable side handle

# Powerful & precise



## Drill chuck with precision

*Fast key & key-less chuck from "RÖHM®"*

**Key chuck** (with key 6,5-13 mm)  
 up to 6,5 mm 8951011473  
 up to 10 mm 8951011451  
 up to 13 mm 8951011452  
 key 8951011453

**Key-less chuck**  
 up to 10 mm 8951011458  
 up to 13 mm 8951011459



## Balancers

In order to design an ergonomic and efficient work station, the straight drills often need to be equipped with balancers as well as straight-ended spiral hoses or hose balancers. (See page 101).



**RC4607**

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16

17

18

19

20



**RC5195**

## 04| Chipping

### | Chisel hammers

- 11 mm hex hammers
- 12 mm hex hammers
- 14,7 mm hex hammers

### | Accessories

- Chisels
- Retainer
- Quick chuck

01

02

03

**04**

05

06

07

08

09

10

11

12

13

14

15

16

17

18


19

20











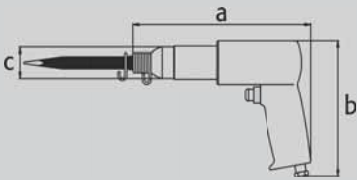

# CHISEL HAMMER


## CHISEL HAMMER SETS



**Model**    **Part#**  
**RC5100**   *8951071022*

|                   |   |                        |
|-------------------|---|------------------------|
| Model             |   | RC5100                 |
| Chisel insert     |  | 11 mm/0.433 in.        |
| Piston Stroke / ø |   | 60/19 mm               |
| Blows             |  | 3000 min <sup>-1</sup> |
| Weight            |  | 1.5 kg                 |
| Hose              |  | 8 mm                   |
| Dimensions axbxc  |  | 200x160x39 mm          |
| Air cons. ave.    |  | 270 l/min              |
| Air cons.         |  | 400 l/min              |
| Air inlet         |  | 1/4" IG                |
| Blow energy       |   | 6 Joule                |
| Sound LpA         |  | 94.8 dB(A)             |
| Vibration         |  | 13.2 m/s <sup>2</sup>  |

6 joule



- Compact chisel hammer with 11 mm hex shank
- Adjustable blow power
- Including retainer spring RC70

**Model**    **Part#**  
**RC5120**   *8951171013*

### Set for car body / metal

Air hammer set hexagonal 11 mm for metal and sheet metal applications in tool box with:

|                                     |        |
|-------------------------------------|--------|
| Air hammer model                    | RC5100 |
| Spring retainer model               | RC70   |
| Deriveting chisel model             | RC22S  |
| Welding spot splitting chisel model | RC19S  |
| Double blade cutting chisel model   | RC60S  |
| Flat chisel model                   | RC20S  |
| Curve splitting chisel model        | RC18S  |



**Model**    **Part#**  
**RC5150**   *8951171023*

### Set for stone / concrete

Air hammer set hexagonal 11 mm for stone and concrete applications in tool box with:

|                                    |        |
|------------------------------------|--------|
| Air hammer model                   | RC5100 |
| Solid retainer model               | RC76-1 |
| Pointed chisel 240 mm length model | SS10   |
| Flat chisel 240 x 20 mm model      | SS20   |
| Flat chisel 240 x 30 mm model      | SS30   |
| Flat chisel 240 x 40 mm model      | SS40   |
| Groove chisel 240 mm model         | SS50   |



**Model**    **Part#**  
**RC5160**   *8951171033*











### Set for brake pads / riveting

Air hammer set hexagonal 11 mm for truck brake pad riveting and removal for hollow aluminium or copper rivets in tool box with:


|  |         |
|--|---------|
| Air hammer model                                     | RC5100  |
| Spring retainer model                                | RC70    |
| Rivet head 8 mm (6 / 10 mm*) model (*optional sizes) | RC40S-8 |
| Deriveter chisel 8 mm (10 mm*) model                 | RC41S-8 |
| Counter holder (anvil) model                         | RC42S-8 |



**Model** Part#  
**RC5185** 8951000152







|                   |  |
|-------------------|--|
| Model             | RC5185   |
| Chisel insert     |  11 mm/0.433 in.        |
| Piston Stroke / ø | 70/19 mm   |
| Blows             |  3000 min <sup>-1</sup> |
| Weight            |  1.7 kg                 |
| Hose              |  8 mm                   |
| Dimensions axbxc  |  179x163x57 mm          |
| Air cons. ave.    |  250 l/min              |
| Air cons.         |  372 l/min              |
| Air inlet         |  1/4" IG                |
| Blow energy       | 9 Joule  |
| Sound LpA         |  102 dB(A)              |
| Vibration         |  8.2 m/s <sup>2</sup>   |

9 joule




- Quick change retainer for fast chisel changes (provided with the tool)
- High resistance throttle & bushing valves
- Teasing trigger
- Aluminum housing
- Back part designed for great handling
- Curved handle with TPR injection on the back part
- Rear exhaust

**Model** Part#  
**RC5195** 8951000154

|                   |  |
|-------------------|--|
| Model             | RC5195   |
| Piston Stroke / ø |  95/19 mm               |
| Blows             |  2100 min <sup>-1</sup> |
| Weight            |  2 kg                   |
| Hose              |  8 mm                   |
| Dimensions axbxc  |  223x163x57 mm          |
| Blow energy       | 12 Joule   |
| Vibration         |  11.9 m/s <sup>2</sup>  |

12 joule



**Model** Part#  
**RC5185K-M** 8951000153  
**RC5195K-M** 8951000155



## Set for metal

## Set with hexagon chisels (11 mm):

1 chisel hammer RC5185 or RC5195 with steel retainer  
 1 Universal chisel - 135 x 19 mm RC73  
 1 De-riveting - 140 x 20 mm RC20S  
 1 Spot weld chisel - 140 x 29 mm RC22S  
 1 Curve cutting chisel 1mm thick - 140 mm RC19S  
 1 tool box RC18S

**Model** Part#  
**RC5185K-C** 8951000208  
**RC5195K-C** 8951000209

## Set for stone / concrete

## Set with hexagon chisels (11 mm):

1 chisel hammer RC5185 or RC5195 with steel retainer RC73  
 1 Pointed chisel - 135 mm SS10K  
 1 Flat chisel - 140 x 20 mm SS20K  
 1 Flat chisel - 140 x 30 mm SS30K  
 1 Flat chisel - 135 x 40 mm SS40K  
 1 tool box

## Low Vibration & Powerful

**Easy to operate:**  
 Quick change retainer for fast chisel changes (provided with the tool)

**High Effectiveness:**  
 Back part designed for great handling














**High resistance throttle & bushing valves teasing trigger**


**Comfort & Insulation:**  
 Curved handle with TPR injection on the back part



# RC5185












Model    Part#  
RC5176    8951171043


|                          |   |                        |
|--------------------------|---|------------------------|
| Model                    |   | RC5176                 |
| Chisel insert            |  | 11 mm/0.433 in.        |
| Piston Stroke / ø        |   | 94/19 mm               |
| Blows                    |  | 2100 min <sup>-1</sup> |
| Weight                   |  | 2.05 kg                |
| Hose                     |  | 8 mm                   |
| Dimensions axbxc         |  | 245x162x39 mm          |
| Air cons. ave.           |  | 260 l/min              |
| Air cons.                |  | 380 l/min              |
| Air inlet                |  | 1/4" IG                |
| Blow energy              |  | 9 Joule                |
| Sound LpA                |  | 97.3 dB(A)             |
| Vibration                |  | 4.5 m/s <sup>2</sup>   |
| Set for stone / concrete |   |                        |



- Hammer with extra long stroke
- Adjustable impacting power, easy to control
- For hexagonal chisels 11 mm
- Including hammer spring RC70











Model    Part#  
RC5305    8951071065


|                   |   |                        |
|-------------------|---|------------------------|
| Model             |   | RC5305                 |
| Chisel insert     |  | 12 mm/0.472 in.        |
| Piston Stroke / ø |   | 50/20 mm               |
| Blows             |  | 3000 min <sup>-1</sup> |
| Weight            |  | 2.55 kg                |
| Hose              |  | 8 mm                   |
| Dimensions axbxc  |  | 294x150x44 mm          |
| Air cons. ave.    |  | 260 l/min              |
| Air cons.         |  | 380 l/min              |
| Air inlet         |  | 1/4" IG                |
| Blow energy       |  | 6 Joule                |
| Sound LpA         |  | 98.8 dB(A)             |
| Vibration         |  | 5.5 m/s <sup>2</sup>   |
| 12 mm hexagonal   |   |                        |



- Small straight hammer for metal or stone for chisels with 12 mm hex shank
- With steel retainer RC76-3











Model    Part#  
RC5310   8951171053


|                   |   |                        |
|-------------------|---|------------------------|
| Model             |   | RC5310                 |
| Chisel insert     |  | 12 mm/0.472 in.        |
| Piston Stroke / ø |   | 50/20 mm               |
| Blows             |  | 3000 min <sup>-1</sup> |
| Weight            |  | 2.55 kg                |
| Hose              |  | 8 mm                   |
| Dimensions axbxc  |  | 294x150x44 mm          |
| Air cons. ave.    |  | 260 l/min              |
| Air cons.         |  | 380 l/min              |
| Air inlet         |  | 1/4" IG                |
| Blow energy       |   | 6 Joule                |
| Sound LpA         |  | 98.8 dB(A)             |
| Vibration         |  | 7.9 m/s <sup>2</sup>   |
| 6 joule           |   |                        |



- Air hammer set hexagonal 12 mm for stone and concrete applications in tool box with:
- Air hammer model RC5305
- Steel retainer model RC76-3
- Pointed chisel 210 mm length model RC51S
- Flat chisel 210 x 20 mm model RC52S
- Flat chisel 210 x 30 mm model RC53S
- Flat chisel 210 x 40 mm model RC54S

Model    Part#  
RC5400   8951071076

|                   |   |                        |
|-------------------|---|------------------------|
| Model             |   | RC5400                 |
| Chisel insert     |  | 14.7 mm/0.579 in.      |
| Piston Stroke / ø |   | 76/29 mm               |
| Blows             |  | 1700 min <sup>-1</sup> |
| Weight            |  | 7.5 kg                 |
| Hose              |  | 13 mm                  |
| Dimensions axbxc  |  | 420x175x57 mm          |
| Air cons. ave.    |  | 480 l/min              |
| Air cons.         |  | 720 l/min              |
| Air inlet         |  | 3/8" IG                |
| Blow energy       |   | 22 Joule               |
| Sound LpA         |  | 99 dB(A)               |
| Vibration         |  | 13.8 m/s <sup>2</sup>  |
| 22 joule          |   |                        |



- Large hammer for chisel insert size 14,7 mm hexagonal for heavy duty applications
- Equipped with steel retainer

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16

17

18

19

20




For Model 5100-5195  
for metal applications

Splitting chisel




Model    Part#  
RC14S    8951011923

Self-guided cutting chisel




Model    Part#  
RC16S    8951011924

Curve cutting chisel for metal 1mm thick




Model    Part#  
RC18S    8951011925

Spot weld chisel




Model    Part#  
RC19S    8951011926

Universal chisel




Model    Part#  
RC20S    8951011927

Deriveting chisel



Model    Part#  
RC22S    8951011928


Double cutting chisel for metal




Model    Part#  
RC60S    8951011930

for concrete and stone applications

Flat chisel 20 mm




Model    Part#  
SS20    8951011934




Model    Part#  
SS20K    8951011935

Flat chisel 30 mm




Model    Part#  
SS30    8951011936




Model    Part#  
SS30K    8951011937

Flat chisel 40 mm



Model    Part#  
SS40    8951011938



Model    Part#  
SS40K    8951011939

Kit 8951011931

Kit RC618 8951011931  
Includes: RC18S, RC19S, RC20S, RC60S,  
RC22S





For Model  
5100-5195

## Raw chisel

12x123 mm



**Model** Part#  
**RC30S** 8951011929

## Pointed chisel

210 mm



**Model** Part#  
**SS10** 8951011932

135 mm



**Model** Part#  
**SS10K** 8951011933

## Riveting chisel



**Model** Part#  
**RC40S-6** 6 mm 8951011942  
**RC40S-8** 8 mm 8951011943  
**RC40S-10** 10mm 8951011944

## Deriveting chisel



**Model** Part#  
**RC41S-8** 6 mm 8951011945  
**RC41S-10** 8 mm 8951011944

## Riveting block for vice



**Model** Part#  
**RC42S-6** 6 mm 8951011947



For Model  
5305

## Pointed chisel

160 mm



**Model** Part#  
**RC51S** 8951011949

## Flat chisel 20 mm

200 mm



**Model** Part#  
**RC52S** 8951011950

## Flat chisel 30 mm


200 mm



**Model** Part#  
**RC53S** 8951011951

## Flat chisel 40 mm

200 mm



**Model** Part#  
**RC54S** 8951011952



For Model  
5400

## Flat chisel 30 mm


30x190 mm



**Model** Part#  
**RC92** 8951011953

## Pointed chisel

185 mm



**Model** Part#  
**RC93S** 8951011954

## Retainer spring



**Model** Part# For  
**RC70** 8951011958 5100-5195

## Retainer aluminium



**Model** Part# For  
**RC76** 8951011961 5100-5195

## Retainer steel



**Model** Part# For  
**RC76-1** 8951011962 5100  
**RC76-3** 8951011964 5305  
**RC94** 8951011955 5400

## Quick chuck



**Model** Part# For  
**RC73** 8951011960 5100-5195

## Spring for steel cap



**Model** Part# For  
**RC79** 8951011963 5305  
**RC95** 8951011956 5400

## Needle scaler attachment



**Model** Part# for  
**RC5605** 8951076000 5100-5195

## Needle set



**Model** Part#  
**RC5605 Needle set 3mm** 8940159860

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16

17

18

19

20



RC5620

## 05| Descaling

- | Needle Scalers
  - Straight scalers
  - Pistol scalers
- | Accessories
  - Needles
  - Needle plates

01

02

03

04

**05**

06

07

08

09

10

11

12

13

14

15

16


17

18











19

20

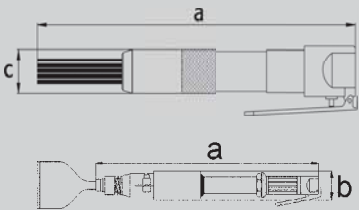NEEDLE SCALER






Model    Part#  
RC5610   8951076001

|                                      |   |                        |
|--------------------------------------|---|------------------------|
| Model                                |   | RC5610                 |
| Needle capacity                      |  | 19 x 3 mm              |
| Blows                                |  | 4000 min <sup>-1</sup> |
| Weight                               |  | 2.55 kg                |
| Hose                                 |  | 8 mm                   |
| Dimensions axbxc                     |  | 468x44 mm              |
| Air cons. ave.                       |  | 190 l/min              |
| Air cons.                            |  | 280 l/min              |
| Air inlet                            |  | 1/4" IG                |
| Sound LpA                            |  | 89.5 dB(A)             |
| Vibration                            |  | 16.8 m/s <sup>2</sup>  |
| Needle set 19 x 3 mm + scraper 20 mm |   |                        |













- Combination tool for two cleaning processes
- Scraping off layers and surfaces with scraper
- Derusting around details with needles
- Incl. scraper and 19x3 mm needles

Accessories for RC5610

|   |                     |   |
|---|---------------------|---|
| Needle set<br>19 pcs. @ 3 mm<br>(Length 180 mm) | Part#<br>8940159860 |  |
| Needle plate<br>19 holes @ 3 mm                 | Part#<br>8951011510 |  |
| Scaler<br>20 mm                                 | Part#<br>8951011497 |  |

Model    Part#  
RC5615   8951076002

|                      |   |                        |
|----------------------|---|------------------------|
| Model                |   | RC5615                 |
| Needle capacity      |  | 12 x 3 mm              |
| Blows                |  | 4000 min <sup>-1</sup> |
| Weight               |  | 1.3 kg                 |
| Hose                 |  | 8 mm                   |
| Dimensions axbxc     |  | 290x35 mm              |
| Air cons. ave.       |  | 120 l/min              |
| Air cons.            |  | 180 l/min              |
| Air inlet            |  | 1/4" IG                |
| Sound LpA            |  | 88.1 dB(A)             |
| Vibration            |  | 11.4 m/s <sup>2</sup>  |
| Needle set 12 x 3 mm |   |                        |













- Small, straight needle scaler for wheel rims, frames and work in limited space
- Incl. 12 x 3 mm needles

Accessories for RC5615

|   |                     |  |
|---|---------------------|--|
| Needle set<br>12 pcs. @ 3 mm<br>(Length 120 mm) | Part#<br>8951011498 |  |
| Needle plate<br>12 holes @ 3 mm                 | Part#<br>8951011511 |   |



Model    Part#  
RC5620   8951076003

|                                 |   |                        |
|---------------------------------|---|------------------------|
| Model                           |   | RC5620                 |
| Needle capacity                 |  | 28 x 3 mm / 14 x 4 mm  |
| Blows                           |  | 4500 min <sup>-1</sup> |
| Weight                          |  | 3.6 kg                 |
| Hose                            |  | 13 mm                  |
| Dimensions axbxc                |  | 345x180x61 mm          |
| Air cons. ave.                  |  | 200 l/min              |
| Air cons.                       |  | 300 l/min              |
| Air inlet                       |  | 3/8" IG                |
| Sound LpA                       |  | 97.6 dB(A)             |
| Vibration                       |  | 13.7 m/s <sup>2</sup>  |
| Needle set 19 x 3 and 14 x 4 mm |   |                        |




- Powerful needle scaler for rough removals
- Incl. 14 x 4 mm needles and for large surfaces 28 x 3 mm needles

Accessories for RC5620

|   |                                   |   |
|---|-----------------------------------|---|
| Needle set<br>14 pcs. @ 4 mm<br>28 pcs. @ 3 mm<br>(Length 180 mm) | Part#<br>8951011501<br>8951011500 |  |
| Needle plate<br>14 holes @ 4 mm<br>28 holes @ 3 mm                | Part#<br>8951011503<br>8951011502 |  |

NEEDLE SCALER



Model     Part#  
RC5625   8951076004

|                                    |  |                        |
|------------------------------------|--|------------------------|
| Model                              |  | RC5625                 |
| Needle capacity                    |  | 29 x 2 mm / 19 x 3 mm  |
| Blows                              |  | 3000 min <sup>-1</sup> |
| Weight                             |  | 2.7 kg                 |
| Hose                               |  | 8 mm                   |
| Dimensions axbxc                   |  | 320x175x47 mm          |
| Air cons. ave.                     |  | 120 l/min              |
| Air cons.                          |  | 170 l/min              |
| Air inlet                          |  | 1/4" IG                |
| Sound LpA                          |  | 94 dB(A)               |
| Vibration                          |  | 17.7 m/s <sup>2</sup>  |
| Needle set 29 x 2 mm and 19 x 3 mm |  |                        |



- To work with small details use 29 x 2 needles
- For rough work 19 x 3 mm needles insulated handle and front exhaust

Accessories for RC5625

|                 |            |  |
|-----------------|------------|--|
| Needle set      | Part#      |  |
| 19 pcs. @ 3 mm  | 8940159860 |  |
| 29 pcs. @ 2 mm  | 8951011504 |  |
| (Length 180 mm) |            |  |
| Needle plate    | Part#      |  |
| 19 holes @ 3 mm | 8951011513 |  |
| 29 holes @ 2 mm | 8951011512 |  |



RC6067



## 06| Speciality tools

### | Cutting tools

- Loppers
- Shears
- Nibbler
- Punching / welting tool
- Files
- Spot weld drills
- Saws

### | Accessories

- Saw blades
- Files

01

02

03

04

05

**06**

07

08

09

10

11

12

13

14

15


16

17

18

19

20

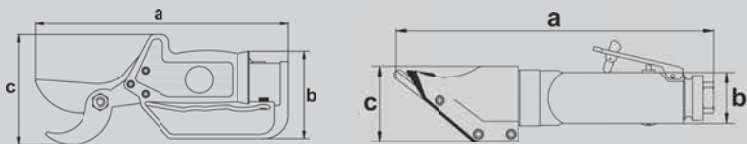

Model     Part#  
RC6220    8951076010

|                  |  |                       |
|------------------|--|-----------------------|
| Model            |  | RC6220                |
| Weight           |  | 0.65 kg               |
| Hose             |  | 8 mm                  |
| Dimensions axbxc |  | 258x116x120 mm        |
| Air cons.        |  | 0.5 l/min             |
| Air inlet        |  | 1/4" IG               |
| Sound LpA        |  | 65.2 dB(A)            |
| Vibration        |  | 2.97 m/s <sup>2</sup> |

For wood, twigs & plastic



- Pruning shear for max. diameter 15 mm
- Cuts wood, plastics and other soft materials, profiles, rods
- Safety latch against accidental cutting
- Knuckle protector

Model     Part#  
RC6210    8951076009

|                  |  |                       |
|------------------|--|-----------------------|
| Model            |  | RC6210                |
| Cutting speed.   |  | 2 m/min               |
| Cutting capacity |  | 1.5 mm                |
| Cutting width    |  | 5 mm                  |
| Weight           |  | 1.2 kg                |
| Hose             |  | 8 mm                  |
| Dimensions axbxc |  | 265x64x55 mm          |
| Air cons.        |  | 360 l/min             |
| Air cons.        |  | 540 l/min             |
| Air inlet        |  | 1/4" IG               |
| Sound LpA        |  | 87.2 dB(A)            |
| Vibration        |  | 4.81 m/s <sup>2</sup> |

Shear 5 mm



- Cuts in the middle keeping the material on both sides almost untouched
- Raw material and cut off part both remain in good shape
- Cutting width 5 mm at 2 m/min
- For thicknesses up to 1,5 mm (normal car body sheet metal and aluminium)
- Cutting curves possible over 100 mm radius




Model     Part#  
RC6212    8951076020

|                  |  |                       |
|------------------|--|-----------------------|
| Model            |  | RC6212                |
| Cutting speed.   |  | 2 m/min               |
| Cutting capacity |  | 1.5 mm                |
| Cutting width    |  | 5 mm                  |
| Weight           |  | 1.2 kg                |
| Hose             |  | 8 mm                  |
| Dimensions axbxc |  | 265x40x60 mm          |
| Air cons.        |  | 360 l/min             |
| Air cons.        |  | 540 l/min             |
| Air inlet        |  | 1/4" IG               |
| Sound LpA        |  | 87.2 dB(A)            |
| Vibration        |  | 4.81 m/s <sup>2</sup> |

Composite shear 5 mm hear 5 mm



- Cuts in the middle keeping the material on both sides in good shape
- Cutting width 5 mm at 2 m/min
- For thicknesses up to 1,5 mm (normal car body sheet metal and aluminium)
- Cutting curves possible over 100 mm radius
- Cold-insulating composite handle with integrated
- Rubber patches for better grip

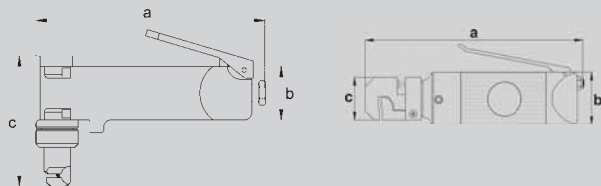

**Model** RC6100  
**Part#** 8951076008

**Model** RC6301  
**Part#** 8951076011

**Model** RC6453  
**Part#** 8951076013

|                  |                       |
|------------------|-----------------------|
| Model            | RC6100                |
| Cutting speed.   | 2.6 m/min             |
| Cutting capacity | 1 mm                  |
| Cutting width    | 4 mm                  |
| Weight           | 0.95 kg               |
| Hose             | 8 mm                  |
| Dimensions axbxc | 262x38 mm             |
| Air cons.        | 360 l/min             |
| Air cons.        | 540 l/min             |
| Air inlet        | 1/4" IG               |
| Sound LpA        | 91.6 dB(A)            |
| Vibration        | 8.55 m/s <sup>2</sup> |

For sheet metal



- Sheet metal nibbler for shaping normal car body
- Material as well as aluminium sheet metal up to 1 mm thickness
- For cutting of small curves or for enlarging holes
- Cutting width 4 mm and cutting speed 2,6 m/min.
- Easy to maintain piston
  - regreasing through lid on top
- Punch and die plate are exchangeable



|                  |                       |
|------------------|-----------------------|
| Model            | RC6301                |
| Tool             | 22x12x1,2 / ø 5x1,2   |
| Weight           | 1 kg                  |
| Hose             | 8 mm                  |
| Dimensions axbxc | 245x54 mm             |
| Air cons.        | 0.8 l/min             |
| Air inlet        | 1/4" IG               |
| Sound LpA        | 70.6 dB(A)            |
| Vibration        | 3.97 m/s <sup>2</sup> |

2 in 1: punching & welting



- Much less tiring to work with than manual tools
- For preparation of up to 1.2 mm sheet metal
- Parts for car body or aluminium before welding
- Punch diameter 5 mm for spot welding
- Equipped with air-hydraulic multiplier system

|                  |                          |
|------------------|--------------------------|
| Model            | RC6453                   |
| Tool             | ø 8                      |
| Stroke/min       | 2000 min <sup>-1</sup>   |
| Weight           | 1,15 without counter arm |
| Hose             | 8 mm                     |
| Dimensions axbxc | 285x215x75 mm            |
| Air cons.        | 110 l/min                |
| Air cons.        | 240 l/min                |
| Air inlet        | 1/4" IG                  |
| Sound LpA        | 88.8 dB(A)               |
| Vibration        | < 2,5 m/s <sup>2</sup>   |

8 mm fraiser bit swiveling contermen



- Fraiser for precise removal of spot welding points for example: car body parts
- Fraising bit is pushed automatically onto the sheet metal by compressed air and the tool begins to run, removing only the point from one layer of the bonding. The lower layer of sheet metal is not drilled
- Adjustable fraising depth by 50 micron steps
- Includes a 75 mm deep counter arm (swivels and can be removed)
- Only usable with fraising bits length 47mm

## Accessories for RC6453

### Fraising Bits

For the precise removal of welding spots without drilling through the "good" side of the sheet metal. Made of very hard cobalt steel HSCo

**Model** 78F  
**Part#** 8951011524



Counter arm 75 mm  
**Model** 6453GH75  
**Part#** 8951011525

Counter arm 140 mm  
**Model** 6453GH140  
**Part#** 8951011526

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15


16

17

18

19



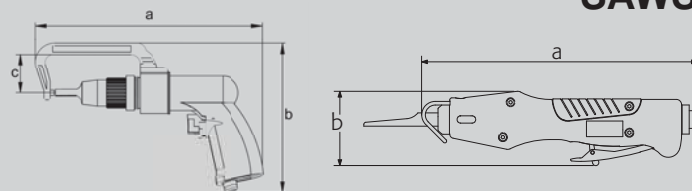







20



|               |                   |
|---------------|-------------------|
| <b>Model</b>  | <b>Part#</b>      |
| <b>RC6900</b> | <i>8951075000</i> |

|               |                   |
|---------------|-------------------|
| <b>Model</b>  | <b>Part#</b>      |
| <b>RC6050</b> | <i>8951079001</i> |











|               |                   |
|---------------|-------------------|
| <b>Model</b>  | <b>Part#</b>      |
| <b>RC6067</b> | <i>8951079011</i> |

|                     |   |                        |
|---------------------|---|------------------------|
| Model               |   | RC6900                 |
| Drive $\varnothing$ |  | 6.5 mm                 |
| Strokes             |  | 3700 min <sup>-1</sup> |
| Weight              |  | 1.1 kg                 |
| Hose                |  | 8 mm                   |
| Dimensions axbxc    |  | 165x48x28 mm           |
| Air cons.           |  | 120 l/min              |
| Air cons.           |  | 170 l/min              |
| Air inlet           |  | 1/4" IG                |
| Sound LpA           |  | 84.5 dB(A)             |
| Vibration           |  | 8.61 m/s <sup>2</sup>  |

## Small file













- For deburring or shapening sheet metal, iron, plastics, deburring
- Double piston drive
- Including file set with 4 different files (flat, half round, round, triangular)

|                  |   |                        |
|------------------|---|------------------------|
| Model            |   | RC6050                 |
| Stroke           |  | 10 mm                  |
| Stroke/min       |  | 9500 min <sup>-1</sup> |
| Weight           |  | 0.65 kg                |
| Hose             |  | 8 mm                   |
| Dimensions axbxc |  | 262x38 mm              |
| Air cons.        |  | 220 l/min              |
| Air cons.        |  | 330 l/min              |
| Air inlet        |  | 1/4" IG                |
| Sound LpA        |  | 79.9 dB(A)             |
| Vibration        |  | 12.57 m/s <sup>2</sup> |

### Easy exchange of blades - rear exhaust



- Fast and handy air saw for sheet metals
- Insulated handle
- Exhaust guided to the rear side
- Ideally suited for precise cutting of car body parts, profiles and sun roofs
- 10 mm stroke

|                  |   |                         |
|------------------|---|-------------------------|
| Model            |   | RC6067                  |
| Stroke           |  | 10 mm                   |
| Stroke/min       |  | 10000 min <sup>-1</sup> |
| Weight           |  | 0.51 kg                 |
| Hose             |  | 8 mm                    |
| Dimensions axbxc |  | 262x38 mm               |
| Air cons.        |  | 150 l/min               |
| Air cons.        |  | 225 l/min               |
| Air inlet        |  | 1/4" IG                 |
| Sound LpA        |  | 79.9 dB(A)              |
| Vibration        |  | 6.32 m/s <sup>2</sup>   |

Low vibration & composite - rear exhaust



- Powerful air saw with composite handle
- Rear exhaust
- Suitable to cut through profiles and multiple layer sheet metals
- Using long saw blades larger tubes and profiles can even be cut in one
- 10000 strokes/min.
- Using a file adapter the tool can also be converted into an air file (extra accessory)

|               |                   |
|---------------|-------------------|
| <b>Model</b>  | <b>Part#</b>      |
| <b>RC6051</b> | <i>8951179000</i> |

Saw Set in tool box including:  
1 saw model RC6050  
5 saw blades fine (32 teeth per inch)  
5 saw blades medium (24 teeth per inch)  
1 mini lubricator model G1K and 1 universal air  
joint model DG1 and keys



## Accessories for RC6900

See page 51



## Saw blades - standard length



|               |                           |
|---------------|---------------------------|
| For model     | Part# 8951011514          |
| <b>RC6050</b> | Teeth / inch: 32          |
| <b>RC6067</b> | Distance of teeth: 0,8 mm |
|               | Material: Bi-Metal        |
|               | A: 4,2 mm                 |

Useable for:  
steel, sheet metal, car body

|               |                           |
|---------------|---------------------------|
| For Model     | Part# 8951011515          |
| <b>RC6050</b> | Teeth / inch: 24          |
| <b>RC6067</b> | Distance of teeth: 1,0 mm |
|               | Material: Bi-Metal        |
|               | A: 4,2 mm                 |

Useable for:  
casted iron, aluminium, copper, zinc,  
composite, bumper

|               |                           |
|---------------|---------------------------|
| For model     | Part# 8951011520          |
| <b>RC6050</b> | Teeth / inch: 18          |
| <b>RC6067</b> | Distance of teeth: 1,4 mm |
|               | Material: Bi-Metal        |
|               | A: 4,2 mm                 |

Useable for:  
plastic, wood, bumper

|               |                           |
|---------------|---------------------------|
| For model     | Part# 8951011519          |
| <b>RC6050</b> | Teeth / inch: 14          |
| <b>RC6067</b> | Distance of teeth: 1,8 mm |
|               | Material: Bi-Metal        |
|               | A: 4,2 mm                 |

Useable for:  
plastic and wood

## Saw blades - extra long



|               |                           |
|---------------|---------------------------|
| For model     | Part# 8951011521          |
| <b>RC6050</b> | Teeth / inch: 32          |
| <b>RC6067</b> | Distance of teeth: 0,8 mm |
|               | Material: Bi-Metal        |
|               | A: 4,2 mm                 |

Useable for: steel, sheet metal, car body


|               |                           |
|---------------|---------------------------|
| For model     | Part# 8951011522          |
| <b>RC6050</b> | Teeth / inch: 24          |
| <b>RC6067</b> | Distance of teeth: 1,0 mm |
|               | Material: Bi-Metal        |
|               | A: 4,2 mm                 |

Useable for: casted iron, aluminium, copper,  
zinc, composite, bumper

|               |                           |
|---------------|---------------------------|
| For model     | Part# 8951011523          |
| <b>RC6050</b> | Teeth / inch: 18          |
| <b>RC6067</b> | Distance of teeth: 1,4 mm |
|               | Material: Bi-Metal        |
|               | A: 4,2 mm                 |

Useable for:  
plastic, wood, bumper

## Saw blades - SIG Type



|               |                           |
|---------------|---------------------------|
| For model     | Part# 8951011523          |
| <b>RC6067</b> | Teeth / inch: 18          |
|               | Distance of teeth: 1,4 mm |
|               | Material: Bi-Metal        |
|               | A: 4,2 mm                 |

Useable for: plastic, wood, bumper

|               |                           |
|---------------|---------------------------|
| For model     | Part# 8951011517          |
| <b>RC6067</b> | Teeth / inch: 32          |
|               | Distance of teeth: 0,8 mm |
|               | Material: Bi-Metal        |
|               | A: 4,2 mm                 |

Useable for: steel, sheet metal

|               |                           |
|---------------|---------------------------|
| For model     | Part# 8951011516          |
| <b>RC6067</b> | Teeth / inch: 24          |
|               | Distance of teeth: 1,0 mm |
|               | Material: Bi-Metal        |
|               | A: 4,2 mm                 |

Useable for:  
casted iron, aluminium, copper, zinc, composite

|               |                           |
|---------------|---------------------------|
| For model     | Part# 8951011518          |
| <b>RC6067</b> | Teeth / inch: 14          |
|               | Distance of teeth: 1,8 mm |
|               | Material: Bi-Metal        |
|               | A: 4,2 mm                 |

Useable for:  
aluminium, copper, zinc, composite, wood

## Accessories for files

### File adapter



|               |   |
|---------------|---|
| For model     | Part# 8951011531                          |
| <b>RC6067</b> | needed for using files with<br>saw RC6067 |

### Set of files



|                |   |
|----------------|---|
| For model      | Part# 8951011529                        |
| <b>RC6900</b>  | included files:                         |
| <b>RC6067*</b> | flat, round<br>half-rounded, triangular |

\* only useable with adapter 8951011531

### Individual files



|                |                     |
|----------------|---------------------|
| For model      | Part# 8951011532    |
| <b>RC6900</b>  | File flat 10 x 3 mm |
| <b>RC6067*</b> |                     |

\* only useable with adapter 8951011531



|                |                           |
|----------------|---------------------------|
| For model      | Part# 8951011533          |
| <b>RC6900</b>  | File round                |
| <b>RC6067*</b> | Length: 115 mm<br>ø: 6 mm |

\* only useable with adapter 8951011531



|                |                               |
|----------------|-------------------------------|
| For model      | Part# 8951011534              |
| <b>RC6900</b>  | File half-rounded 10 x 3,8 mm |
| <b>RC6067*</b> | Length: 115 mm<br>ø: 6 mm     |

\* only useable with adapter 8951011531



|                |                           |
|----------------|---------------------------|
| For model      | Part# 8951011535          |
| <b>RC6900</b>  | File triangular 7 x 7 mm  |
| <b>RC6067*</b> | Length: 115 mm<br>ø: 6 mm |

\* only useable with adapter 8951011531

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16

17

18

19

20



**RC6718Xi**

## 07| Riveting

### | Riveters

- For aluminium & copper
- For steel
- For stainless steel

01

02

03

04

05

06

**07**

08

09

10

11

12

13

14

15

16

17


18

19

20



RIVETERS



Model    Part#  
RC6700   8951074001

|                         |          |                          |
|-------------------------|----------|--------------------------|
| Model                   |          | RC6700                   |
| Blind rivet             |          | 2.4 - 5.0 mm             |
| Mouthpiece<br>Rivet pin |          | 1.8 / 2.2 / 2.8 / 3.3 mm |
| Force                   | <b>F</b> | 12000 N                  |
| Weight                  |          | 1.6 kg                   |
| Hose                    |          | 8 mm                     |
| Dimensions axbxc        |          | 225x280x100 mm           |
| Air cons.               |          | 1.2 l/min                |
| Air inlet               |          | 1/4" IG                  |
| Sound LpA               |          | 86.5 dB(A)               |
| Vibration               |          | 3.5 m/s <sup>2</sup>     |

Up to 5 mm standard (alu/copper)



- Handy blind riveter with collection container for torn-off rivet pins
- Durable air-hydraulic force multiplying system
- Hanger for use with balancers with 4 different sizes of mouthpieces
- Only useable for copper, aluminium or softer material

Model    Part#  
RC6710   8951074002

|                         |          |                                      |
|-------------------------|----------|--------------------------------------|
| Model                   |          | RC6710                               |
| Blind rivet             |          | 2.4 - 6.4 mm                         |
| Mouthpiece<br>Rivet pin |          | 1.9 / 2.4 / 2.9 / 3.4 / 4.0 / 4.4 mm |
| Force                   | <b>F</b> | 19000 N                              |
| Weight                  |          | 2.1 kg                               |
| Hose                    |          | 8 mm                                 |
| Dimensions axbxc        |          | 255x325x110 mm                       |
| Air cons.               |          | 1.8 l/min                            |
| Air inlet               |          | 1/4" IG                              |
| Sound LpA               |          | 64.1 dB(A)                           |
| Vibration               |          | 4.3 m/s <sup>2</sup>                 |

Up to 6,4 mm standard (alu/copper)



- Handy blind riveter with collection container for torn-off rivet pins
- Durable air-hydraulic force multiplying system
- Hanger for use with balancers
- With 6 different sizes of mouthpieces
- Only useable for copper, aluminium or softer material

Model    Part#  
RC6715   8951074003

|                         |          |                          |
|-------------------------|----------|--------------------------|
| Model                   |          | RC6715                   |
| Blind rivet             |          | 3.2 - 6.4 mm             |
| Mouthpiece<br>Rivet pin |          | 2.1 / 2.8 / 3.2 / 4.5 mm |
| Force                   | <b>F</b> | 15000 N                  |
| Weight                  |          | 1.8 kg                   |
| Hose                    |          | 8 mm                     |
| Dimensions axbxc        |          | 300x300x100 mm           |
| Air cons.               |          | 1.1 l/min                |
| Air inlet               |          | 1/4" IG                  |
| Sound LpA               |          | 77.3 dB(A)               |
| Vibration               |          | 2.4 m/s <sup>2</sup>     |

Up to 6,4 mm standard (alu/copper)



- Robust riveter with big collection container for torn-off rivet pins
- Ergonomic rubber coated handle
- Hanger for use with balancers
- Durable air-hydraulic force multiplying system
- With 4 different sizes of mouthpieces
- Useable for copper, aluminium & steel
- Not suited for stainless steel










Balancer

Model    Part#  
RC9313   8951011262



- Capacity 2 to 3 kg
- Stroke 1600 mm

Model    Part#  
RC6718Xi 8951074008








|                         |   |                                    |
|-------------------------|---|------------------------------------|
| Model                   |   | RC6718Xi                           |
| Blind rivet             |  | 4.0 - 6.4 mm                       |
| Mouthpiece<br>Rivet pin |  | 2.5 / 3.2 / 4.1 /<br>4.2 mm „BOLT“ |
| Force                   | <b>F</b>  | 15200 N                            |
| Weight                  |  | 1.9 kg                             |
| Hose                    |  | 8 mm                               |
| Dimensions axbxc        |  | 310x316x136 mm                     |
| Air cons.               |  | 4.3 l/min                          |
| Air inlet               |  | 1/4" IG                            |
| Sound LpA               |  | 76.2 dB(A)                         |
| Vibration               |  | 2.2 m/s <sup>2</sup>               |

Suction up to 6,4 mm (steel)



- High quality riveter with rivet pin removal by suction (can be switched off)
- Transparent container
- Two-finger trigger for easier operation and ON/OFF-switch
- Cold insulated handle
- Hanger for use with balancers
- Useable for copper, aluminium & steel
- Not suited for stainless steel

Model    Part#  
RC6720 8951074004

|                         |   |   |
|-------------------------|---|---|
| Model                   |   | RC6720  |
| Blind rivet             |  | 4.8 - 6.4 mm (Inox)<br>4.8 - 8.0 mm (Steel)<br>6.4 mm "BULB" (Steel)<br>6.4 mm "BOLT" (Steel) |
| Mouthpiece<br>Rivet pin |  | 3.2 / 4.3 / 5.1 mm<br>4.2 mm for „BOLT“   |
| Force                   | <b>F</b>  | 12000 N   |
| Weight                  |  | 2.6 kg  |
| Hose                    |  | 8 mm  |
| Dimensions axbxc        |  | 225x280x100 mm  |
| Air cons.               |  | 2 l/min   |
| Air inlet               |  | 1/4" IG   |
| Sound LpA               |  | 66.2 dB(A)  |
| Vibration               |  | 3.5 m/s <sup>2</sup>  |

For BULB & BOLT rivets



- High quality riveter with rivet pin removal by suction (can be switched off)
- Transparent container
- Hanger for use with balancers
- Useable for copper, aluminium, steel & stainless steel
- Also useable with high tension Bulb & Bolt rivets

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16

17

18

19

20



**RC7702V6**

## 08| Grinding & sanding

- | Grinder


  - Die & angle die grinders
  - Erasers
  - Tyre buffer
  - Pistol & angle grinders
  - MBX-removal system
- | Sanders

  - Belt sanders
  - Orbital sanders
- | Accessories

  - Collets
  - Abrasives
  - Eraser wheels
  - MBX brushes
  - Backing pads
  - Cutting discs




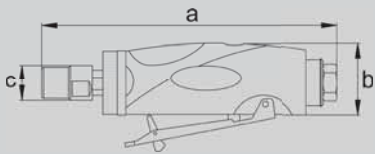







|           |
|-----------|
| 01        |
| 02        |
| 03        |
| 04        |
| 05        |
| 06        |
| 07        |
| <b>08</b> |
| 09        |
| 10        |
| 11        |
| 12        |
| 13        |
| 14        |
| 15        |
| 16        |
| 17        |
| 18        |
| 19        |
| 20        |

DIE GRINDER < 400 W



Model  
RC7051

Part#  
8951000165












|                     |   |                        |
|---------------------|---|------------------------|
| Model               | RC7051  |                        |
| Collet              |  | 3 mm                   |
| Power               |  | 40 W                   |
| Speed               |  | 60000 rpm              |
| Weight              |  | 0.2 kg                 |
| Hose                |  | 8 mm                   |
| Dimensions axbxc    |  | 190x145x50 mm          |
| Air cons.           |  | 96 l/min               |
| Air cons.           |  | 192 l/min              |
| Air inlet           |  | 1/4" IG                |
| Sound LpA           |  | 71 dB(A)               |
| Vibration           |  | < 2,5 m/s <sup>2</sup> |
| 40 Watt - 60000 rpm |   |                        |



- 3 mm lightweight die grinder
- 60000 rpm with rear exhaust
- 1/8" collet included

Model  
RC7009

Part#  
8951000274












|                      |   |                       |
|----------------------|---|-----------------------|
| Model                | RC7009  |                       |
| Collet               |  | 6 mm                  |
| Power                |  | 300 W                 |
| Speed                |  | 30000 rpm             |
| Weight               |  | 0.37 kg               |
| Hose                 |  | 8 mm                  |
| Dimensions axbxc     |  | 190x145x50 mm         |
| Air cons.            |  | 144 l/min             |
| Air cons.            |  | 564 l/min             |
| Air inlet            |  | 1/4" IG               |
| Sound LpA            |  | 85.7 dB(A)            |
| Vibration            |  | 3.33 m/s <sup>2</sup> |
| 300 Watt - 30000 rpm |   |                       |



- High speed motor (30 000 RPM)
- Metal housing with composite painting for great grip
- Rear exhaust
- Safety trigger

Model  
RC7058

Part#  
8951000278

|                      |   |                       |
|----------------------|---|-----------------------|
| Model                | RC7058  |                       |
| Collet               |  | 6 mm                  |
| Power                |  | 700 W                 |
| Speed                |  | 23500 rpm             |
| Weight               |  | 0.82 kg               |
| Hose                 |  | 8 mm                  |
| Dimensions axbxc     |  | 190x145x50 mm         |
| Air cons.            |  | 288 l/min             |
| Air cons.            |  | 1146 l/min            |
| Air inlet            |  | 1/4" IG               |
| Sound LpA            |  | 92.7 dB(A)            |
| Vibration            |  | 1.82 m/s <sup>2</sup> |
| 700 Watt - 23500 rpm |   |                       |



- 700W power
- Composite housing with ergonomic trigger for perfect handling
- Rear exhaust
- Long spindle for easy access to workspace

Engravers Tune up Kit

|        |            |
|--------|------------|
| Model  | Part#      |
| RC7051 | 8950280060 |



# For bodyshop professionnals




**Spindel lock**

**400W with low speed  
and low vibration**





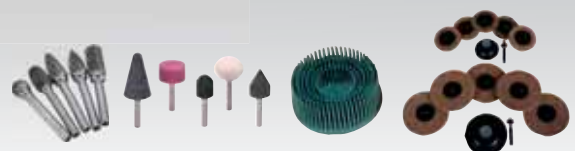





**Compatible with large  
range of accessories**

**RC7128**



Model  
RC7028

Part#  
8951000275

|                      |   |                       |
|----------------------|---|-----------------------|
| Model                |   | RC7028                |
| Collet               |  | 6 mm                  |
| Power                |  | 400 W                 |
| Speed                |  | 27000 rpm             |
| Weight               |  | 0.72 kg               |
| Hose                 |  | 8 mm                  |
| Dimensions axbxc     |  | 190x145x50 mm         |
| Air cons.            |  | 228 l/min             |
| Air cons.            |  | 900 l/min             |
| Air inlet            |  | 1/4" IG               |
| Sound LpA            |  | 85.2 dB(A)            |
| Vibration            |  | 2.38 m/s <sup>2</sup> |
| 400 Watt - 27000 rpm |   |                       |









- Perfect for burrs and mounted points
- Straight universal 400W die grinder
- One hand spindle lock
- High torque motor
- "Beast" design rubber handle



Model  
RC7048

Part#  
8951000276












|                      |   |                       |
|----------------------|---|-----------------------|
| Model                |   | RC7048                |
| Collet               |  | 6 mm                  |
| Power                |  | 400 W                 |
| Speed                |  | 27000 rpm             |
| Weight               |  | 0.8 kg                |
| Hose                 |  | 8 mm                  |
| Dimensions axbxc     |  | 190x145x50 mm         |
| Air cons.            |  | 228 l/min             |
| Air cons.            |  | 900 l/min             |
| Air inlet            |  | 1/4" IG               |
| Sound LpA            |  | 85.7 dB(A)            |
| Vibration            |  | 3.78 m/s <sup>2</sup> |
| 400 Watt - 27000 rpm |   |                       |



- For tight workspace
- Extended 400W die grinder
- One hand spindle lock
- High torque motor
- "Beast" design rubber handle

Model  
RC7128

Part#  
8951000277

|                      |   |                       |
|----------------------|---|-----------------------|
| Model                |   | RC7128                |
| Collet               |  | 6 mm                  |
| Power                |  | 400 W                 |
| Speed                |  | 23000 rpm             |
| Weight               |  | 0.76 kg               |
| Hose                 |  | 8 mm                  |
| Dimensions axbxc     |  | 190x145x50 mm         |
| Air cons.            |  | 228 l/min             |
| Air cons.            |  | 900 l/min             |
| Air inlet            |  | 1/4" IG               |
| Sound LpA            |  | 84.8 dB(A)            |
| Vibration            |  | 4.05 m/s <sup>2</sup> |
| 400 Watt - 23000 rpm |   |                       |



- Ideal for backing pads and cleaning applications
- 400W angle die grinder
- One hand spindle lock
- High torque motor
- "Beast" design rubber handle





# Strong power and spindle lock

**400W  
27 000 RPM  
Power regulation**

**Less fatigue and precise  
work with vibration below  
2,5 m.s<sup>-2</sup>**



**Fast and secure  
spindle lock system  
made of metal ring**




**Designed for safety  
and ergonomics**

**RC7028  
RC7048**














# DIE GRINDER ERASER



Model  
RC7068

Part#  
8951000329












|                     |   |                       |
|---------------------|---|-----------------------|
| Model               | RC7068  |                       |
| Collet              |  | 6 mm                  |
| Power               |  | 400 W                 |
| Speed               |  | 2800 rpm              |
| Weight              |  | 0.95 kg               |
| Hose                |  | 8 mm                  |
| Dimensions axbxc    |  | 217x72x43 mm          |
| Air cons.           |  | 228 l/min             |
| Air cons.           |  | 900 l/min             |
| Air inlet           |  | 1/4" IG               |
| Sound LpA           |  | 96.1 dB(A)            |
| Vibration           |  | 4.05 m/s <sup>2</sup> |
| 400 Watt - 2800 rpm |   |                       |



- Low speed die grinder providing huge working torque
- 2800 RPM with speed regulator
- "Beast" design rubber handle
- Rear exhaust
- Safety trigger

Model  
RC7684

Part#  
8951000115

|                      |   |                       |
|----------------------|---|-----------------------|
| Model                | RC7684  |                       |
| Collet               |  | 6 mm                  |
| Power                |  | 250 W                 |
| Speed                |  | 20000 rpm             |
| Weight               |  | 0.52 kg               |
| Hose                 |  | 8 mm                  |
| Dimensions axbxc     |  | 120x125x42 mm         |
| Air cons.            |  | 350 l/min             |
| Air cons.            |  | 470 l/min             |
| Air inlet            |  | 1/4" IG               |
| Sound LpA            |  | 80.1 dB(A)            |
| Vibration            |  | 4.02 m/s <sup>2</sup> |
| 250 Watt - 20000 rpm |   |                       |



- Pistol grinder with good power transmission (no angle gear)
- With silencing exhaust hose system, for extra reduced noise and no disturbing exhausted air
- 3 mm collet as extra accessory available












Model      Part#  
**RC7684RE**    8951000118  
Pistol grinder with exhaust hose DUS35

- Model      Part#  
**RC7686RE**    8951000119
- Pistol Die Grinder Set with:
- 6 mm collets pistol die grinder model RC7684RE with silencing exhaust hose system model DUS35
  - Backing pads 50 mm and 75 mm with Roll-On quick assembly system
  - 5 abrasive felt 50 mm
  - 5 abrasive felt 75 mm
  - 3 "Bristle" disk (K50/K80/K120)
  - 1 oil bottle
  - 1 tool box




Model  
RC7038

Part#  
8951000328

|                                |   |                           |
|--------------------------------|---|---------------------------|
| Model                          | RC7038  |                           |
| Spindle Size                   |  | 3/8"-24 male 5/16" female |
| Power                          |  | 400 W                     |
| Speed                          |  | 2800 rpm                  |
| Weight                         |  | 0.92 kg                   |
| Hose                           |  | 8 mm                      |
| Dimensions axbxc               |  | 210x72x43 mm              |
| Air cons.                      |  | 500 l/min                 |
| Air cons.                      |  | 918 l/min                 |
| Air inlet                      |  | 1/4" IG                   |
| Sound LpA                      |  | 86 dB(A)                  |
| Vibration                      |  | 4.5 m/s <sup>2</sup>      |
| Erasing of adhesives and vinyl |   |                           |



- Efficient tool for renovation of painted surfaces with a slim eraser wheel
- No danger for the painted surface – please follow the instruction manual strictly (clean and dust-free, do not press)
- Low speed erasing due to the powerful planetary gear avoids heating up
- Good grip due to integrated rubber patches
- Lever sinks plainly into the housing



Collet



|       |                      |
|-------|----------------------|
| Shaft | Part# 8951011483     |
| 3 mm  | for model:<br>RC7051 |

|       |   |
|-------|---|
| Shaft | Part# 8951011460  |
| 3 mm  | for model:<br>RC7009, RC7028, RC7048,<br>RC7128, RC7058, RC7684 |

|       |   |
|-------|---|
| Shaft | Part# 8951011477  |
| 1/8"  | for model:<br>RC7009, RC7028, RC7048,<br>RC7128, RC7058, RC7684 |

|       |   |
|-------|---|
| Shaft | Part# C139289   |
| 6 mm  | for model:<br>RC7009, RC7028, RC7048,<br>RC7128, RC7058, RC7684 |

|       |   |
|-------|---|
| Shaft | Part# C138727   |
| 1/4"  | for model:<br>RC7009, RC7028, RC7048,<br>RC7128, RC7058, RC7684 |

|       |   |
|-------|---|
| Shaft | Part# 8940174848  |
| 8 mm  | for model:<br>RC7009, RC7028, RC7048,<br>RC7128, RC7058, RC7684 |

Carborundum grinding points



|       |                  |
|-------|------------------|
| Shaft | Part# 8951011574 |
| 6 mm  | Content 5 pcs.   |

Roloc® bristle discs



|       |  |
|-------|--|
| Grain | Part# 8951011633   |
| K50   | Diameter: 50 mm (2")<br>Quantity: 5 pcs.<br>Color: green |

|       |   |
|-------|---|
| Grain | Part# 8951011635  |
| K80   | Diameter: 50 mm (2")<br>Quantity: 5 pcs.<br>Color: yellow |

|       |  |
|-------|--|
| Grain | Part# 8951011634   |
| K120  | Diameter: 50 mm (2")<br>Quantity: 5 pcs.<br>Color: white |

Roloc® backing pad



|       |                                |
|-------|--------------------------------|
| Shaft | Part# 8951011629               |
| 6 mm  | Diameter: 15 mm (1/2") 1-piece |

|       |                              |
|-------|------------------------------|
| Shaft | Part# 8951011631             |
| 6 mm  | Diameter: 50 mm (2") 2-piece |

|                   |   |
|-------------------|---|
| Shaft             | Part# CA158102                            |
| 1/4"-20<br>UNC IG | Diameter: 75 mm (3") 1-piece<br>for 7681K |

Roloc® abrasive felt




|               |  |
|---------------|--|
| Model         | Part# 8951011557                         |
| Roloc, siafix | Diameter: 50 mm (2")<br>Quantity: 5 pcs. |

|               |  |
|---------------|--|
| Model         | Part# 8951011558                         |
| Roloc, siafix | Diameter: 75 mm (3")<br>Quantity: 5 pcs. |

|    |
|----|
| 01 |
| 02 |
| 03 |
| 04 |
| 05 |
| 06 |
| 07 |
| 08 |
| 09 |
| 10 |
| 11 |
| 12 |
| 13 |
| 14 |
| 15 |
| 16 |
| 17 |
| 18 |
| 19 |
| 20 |

RODCRAFT MBX-REMOVAL SYSTEM



Model  
**RC7091**

Part#  
**8951176010**

|                  |  |                        |
|------------------|--|------------------------|
| Model            |  | RC7091                 |
| Power            |  | 420 W                  |
| Speed            |  | 3500 rpm               |
| Weight           |  | 1.1 kg                 |
| Hose             |  | 8 mm                   |
| Dimensions axbxc |  | 275x95x40 mm           |
| Air cons.        |  | 110 l/min              |
| Air cons.        |  | 670 l/min              |
| Air inlet        |  | 1/4" IG                |
| Sound LpA        |  | 83.2 dB(A)             |
| Vibration        |  | < 2,5 m/s <sup>2</sup> |

MBX Automotive Set



**RODCRAFT MBX**  
A patented system with tool and accessory program. With and without sand blasting effect (without sand) for removing rust, under body coating, paint, sealants and various types of stickers, decals, trim lines or vinyl adhesives.

Set RC7091 consists of:

- 1 machine
- 1 adapter wheel 11 mm *8951011648*
- 1 adapter wheel 23 mm *8951011647*
- 1 brush belt black 11 mm *8951011664\**
- 1 brush belt black 23 mm *8951011663\**
- 1 brush belt ocre 11 mm *8951011666\**
- 1 brush belt green 11 mm *8951011668\**
- 1 eraser wheel 23 mm *8951011652*

\* when reordered only available with content of 5 pcs.



ERASING



**Cold removing:**  
vinyls, decals, trims, stickers without damaging the paint surface - no heating up!



Width 23 mm

Model (Part#)  
**ZU014** (8951011649) content 5 pcs.  
**ZU010** (8951011652) content 1 pcs.



Eraser wheel

Removal of vinyl, glue, stickers, decals, trim lines, double sided adhesive tape from painted sheet metal, fibreglass, glass, wood, aluminium.

Not good for use on polyethylene, polypropylene, acryl, plexiglass. The manufacturer cannot be held liable for use on any of these materials - if in doubt test on specimen area first.

SPECIAL FINE



**Removing:**  
paint and corrosion. For working on aluminium car bodies and non-ferrous metal parts. With and without sand blasting effect!



Width 23 mm

Model (Part#)  
**BU018-5** (8951011671) content 5 pcs. straight Ø 0,5 mm stainless steel

**BU019-5** (8951011669) content 5 pcs. angled, sand blast effect Ø 0,5 mm stainless steel

Width 11 mm

(Especially for difficult to reach spots, like 90° angles)  
Model (Part#)

**BU031-5** (8951011672) content 5 pcs. straight Ø 0,5 mm stainless steel

**BU030-5** (8951011670) content 5 pcs. angled, sand blast effect Ø 0,5 mm stainless steel

Straight version:

Stripping paint and corrosion from aluminium parts (car, truck or bus body). Very versatile and selective the brush belt does not remove structures like rivet heads, screws etc. and can be used easily on contours. With or without sand blasting effect.



Angled version:

Stripping paint and corrosion from aluminium parts (car, truck or bus body). Very versatile and selective the brush belt does not remove structures like rivet heads, screws etc. and can be used easily on contours. With or without sand blasting effect.



Made in Germany



## FINE



### Removing:

paint, coatings (eg sealants) and rust without sand blasting effect!



### Width 23 mm

Model (Part#)

**BU017-5** (8951011667) content 5 pcs.  
straight, hardened tip  
Ø 0,5 mm spring steel

### Width 11 mm

(Especially for difficult to reach spots, like 90° angles)

Model (Part#)

**BU028-5** (8951011668) content 5 pcs.  
straight, hardened tip  
Ø 0,5 mm spring steel

Rust removal and cleaning, taking gaskets away from casted iron but not suited for aluminium sheet metal or casted aluminium! Without sand blasting effect. 11 mm version strips paint even in contoured areas, in corners and removes protective coatings from sheet metals before welding them e.g. into the car body.



Made in Germany

## MEDIUM



### Removing:

rust and oxides with fine sand blasting effect. Works also in corners and confined areas.



### Width 23 mm

Model (Part#)

**BU022-5** (8951011665) content 5 pcs.  
angled, sharpened, hardened  
sand blasting effect  
Ø 0,5 mm spring steel  
lifetime can be extended  
by resharpening

### Width 11 mm

(Especially for difficult to reach spots, like 90° angles)

Model (Part#)

**BU021-5** (8951011666) content 5 pcs.  
angled, sharpened, hardened  
sand blasting effect  
Ø 0,5 mm spring steel  
lifetime can be extended  
by resharpening

High efficiency rust removal brush belts, cleaning even porous surfaces and on difficult to reach spots, like 90° corners.




Made in Germany

## COARSE



### Removing:

under body coating, sealants as well as thick paint. With very coarse sand blasting effect!

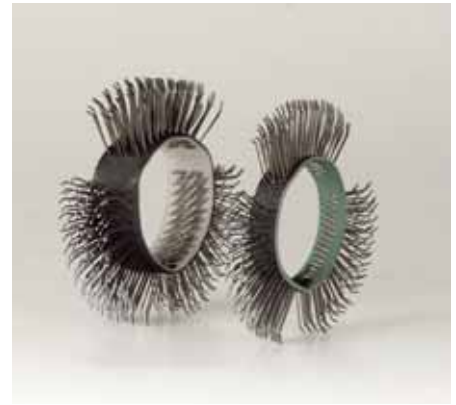

### Width 23 mm

Model (Part#)

**BU015-5** (8951011663) content 5 pcs.  
angled, sharpened,  
hardened tip, sand blasting effect  
Ø 0,7 mm spring steel  
lifetime can be extended  
by resharpening

### Width 11 mm

(Especially for difficult to reach spots, like 90° angles)

Model (Part#)










**BU020-5** (8951011664) content 5 pcs.  
angled, sharpened,  
hardened tip, sand blasting effect  
Ø 0,7 mm spring steel  
lifetime can be extended  
by resharpening

Removal of under body coatings and sealants, stripping paint. Very well suited for welding seam areas, contours and corners - with sand blasting effect.



Made in Germany

| Model    | Part#      |           |
|----------|------------|-----------|
| RC7072RE | 8951075270 | 19000 rpm |
| RC7077RE | 8951075310 | 3400 rpm  |

| Model      | RC7072RE  | RC7077RE              |
|------------|---|-----------------------|
| Collet     |  10 mm                 | 10 mm                 |
| Power      |  400 W                 | 400 W                 |
| Speed      |  19000 rpm             | 3400 rpm              |
| Weight     |  0.65 kg               | 0.8 kg                |
| Hose       |  8 mm                  | 8 mm                  |
| Dim. axbxc |  232x43x35 mm          | 232x40x44 mm          |
| Air cons.  |  410 l/min             | 410 l/min             |
| Air cons.  |  520 l/min             | 520 l/min             |
| Air inlet  |  1/4" IG               | 1/4" IG               |
| Sound LpA  |  74.8 dB(A)            | 74 dB(A)              |
| Vibration  |  3.04 m/s <sup>2</sup> | 5.32 m/s <sup>2</sup> |

Tyre buffering with 10 mm quick chuck














- Easy to control handle form
- Slow running powerful planetary gear
- "RE" models are equipped with a silencing
- Exhaust hose system that takes away the
- Cold air - also avoids rubber dust being
- Distributed, no lubricants from the compressed
- Air can get onto the cleanly buffed surface, that
- Should be ready for vulcanisation
- Equipped with 10 mm quick chuck

### Accessories for tyre buffer

10 mm quick chuck brand Röhme®  
Part# 8951011458



| Model    | Part#      |
|----------|------------|
| RC7075RE | 8951075290 |

| Model            | RC7075RE  |
|------------------|---|
| Collet           |  11 mm                 |
| Power            |  400 W                 |
| Speed            |  3400 rpm              |
| Weight           |  0.8 kg                |
| Hose             |  8 mm                  |
| Dimensions axbxc |  340x40x32 mm          |
| Air cons.        |  410 l/min             |
| Air cons.        |  520 l/min             |
| Air inlet        |  1/4" IG               |
| Sound LpA        |  74.1 dB(A)            |
| Vibration        |  5.58 m/s <sup>2</sup> |


Tyre buffering with 11 mm hex. quick chuck



- Easy to control handle form
- Slow running powerful planetary gear
- "RE" models are equipped with a silencing
- Exhaust hose system that takes away the cold air - also avoids rubber dust being distributed, no lubricants from the compressed air can get onto the cleanly stuffed surface, that should be ready for vulcanisation
- Version 7078RE for high radial forces (with extra heavy duty front bearing)
- Equipped with quick change chucks with threaded adapter 3/8"-24













11 mm hexagonal chuck part# 8951011463  
Automatically centering chuck/adapter for extremely high power without slipping. Accessories and grinding wheels e.g. for tyre buffering can be quickly exchanged. Including an adapter for the use of drill chucks 3/8"-24.





**Model**  
**RC7681K**

**Part#**  
**8951000019**

|                  |  |
|------------------|--|
| Model            | RC7681K  |
| Drive            |  1/4" – 20UNC AG      |
| Disc             |  50 - 75 mm           |
| Power            |  150 W                |
| Speed            |  15000 rpm            |
| Weight           |  0.4 kg               |
| Hose             |  8 mm                 |
| Dimensions axbxc |  120x125x42 mm        |
| Air cons.        |  365 l/min            |
| Air cons.        |  490 l/min            |
| Air inlet        |  1/4" BSP IG          |
| Sound LpA        |  74.6 dB(A)           |
| Vibration        |  5.9 m/s <sup>2</sup> |

**Direct Drive - Composite**














- For spot repairs - paint repairs limited to a small area, saving time and consumables
- Lightweight and handy tool with composite housing
- Speed regulator with thumb knob for one hand operation
- Air exhaust down motor housing

Set RC7681 consists of:

- 1 Pistol grinder
- 1 backing pad 50 mm (2") Roloc®
- 1 backing pad 75 mm (3") Roloc®
- 1 abrasive 50 mm (2") fine
- 1 abrasive 75 mm (3") fine
- 1 abrasive 50 mm (2") medium
- 1 abrasive 75 mm (3") medium
- 1 abrasive 50 mm (2") coarse
- 1 abrasive 75 mm (3") coarse
- 1 tool box

**Model**  
**RC7150**

**Part#**  
**8951072021**

|                  |  |
|------------------|--|
| Model            | RC7150   |
| Drive            |  7/16" -20AG                    |
| Disc x hole      |  75x22 mm, 105x22 mm, 115x22 mm |
| Power            |  500 W                          |
| Speed            |  18000 rpm                      |
| Weight           |  1.15 kg                        |
| Hose             |  8 mm                           |
| Dimensions axbxc |  152x157x38 mm                  |
| Air cons.        |  410 l/min                      |
| Air cons.        |  570 l/min                      |
| Air inlet        |  1/4" BSP IG                    |
| Sound LpA        |  71 dB(A)                       |
| Vibration        |  3.2 m/s <sup>2</sup>           |

**For flexible fibre disc up to 115 mm**



- Fast pistol sander with adjustable speed (and power) for fibre discs
- For safety reasons this tool cannot be used with hard cutting and grinding discs, please see our models 7160 - 7166 with speed governor










## Accessories for RC7150

|                         | Model  | Part#      |
|-------------------------|--------|------------|
| Protective guard        | 7150-S | 8951011538 |
| Backing pad 75 x 22 mm  | 316-2  | 8951011544 |
| Backing pad 105 x 22 mm | 416-2  | 8951011545 |
| Backing pad 125 x 22 mm | 516-2  | 8951011548 |



**Model**  
**RC7120**

**Part#**  
**8951072001**

|                  |  |
|------------------|--|
| Model            | RC7120   |
| Drive            |  5/8" AG              |
| Disc             |  178 mm               |
| Power            |  500 W                |
| Speed            |  4500 rpm             |
| Weight           |  2 kg                 |
| Hose             |  8 mm                 |
| Dimensions axbxc |  320x38x100 mm        |
| Air cons.        |  525 l/min            |
| Air cons.        |  700 l/min            |
| Air inlet        |  1/4" IG              |
| Sound LpA        |  91.4 dB(A)           |
| Vibration        |  2.7 m/s <sup>2</sup> |

**For flexible fibre disc up to 178 mm**




- With 5/8" thread and 178 mm backing pad
- Ergonomically optimised angle grinder with cold-insulated handle
- Silencer and rear exhaust
- Easy maintenance grease plug for fast regreasing of the angle gear
- Additional side handle can be mounted on both sides for both left and right handed persons

## Accessories for RC7120

Backing pad 170 mm x 5/8" IG **KF129587**



Velcro pad 150 mm x 5/8" IG **8951011554**



01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16

17


18

19

20



ANGLE GRINDER

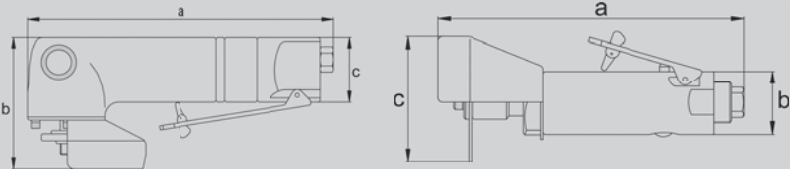

| Model  | Part#      |                    |
|--------|------------|--------------------|
| RC7160 | 8951075021 | 100x16 mm          |
| RC7166 | 8951075051 | 115x22 - 125x22 mm |

| Model  | Part#      |          |
|--------|------------|----------|
| RC7171 | 8951000210 | 100x16mm |
| RC7172 | 8951000211 | 115x22mm |
| RC7173 | 8951000212 | 125x22mm |

| Model  | Part#      |
|--------|------------|
| RC7190 | 8951075101 |

| Model       | RC7160                | RC7166                |
|-------------|-----------------------|-----------------------|
| Drive       | M10x1,5 AG            | M14x2,0 AG            |
| Disc x hole | 100x16 mm             | 115x22 - 125x22 mm    |
| Power       | 750 W                 | 750 W                 |
| Speed       | 10000 rpm             | 10000 rpm             |
| Weight      | 1.6 kg                | 1.6 kg                |
| Hose        | 8 mm                  | 8 mm                  |
| Dim. axbxc  | 232x93x47 mm          | 232x93x47 mm          |
| Air cons.   | 490 l/min             | 490 l/min             |
| Air cons.   | 650 l/min             | 650 l/min             |
| Air inlet   | 1/4" IG               | 1/4" IG               |
| Sound LpA   | 85.2 dB(A)            | 85.6 dB(A)            |
| Vibration   | 4.56 m/s <sup>2</sup> | 5.69 m/s <sup>2</sup> |

For discs 100 to 125 mm

| Model       | RC7171               | RC7172             | RC7173               |
|-------------|----------------------|--------------------|----------------------|
| Drive       | M10                  | M10                | M14                  |
| Disc x hole | 100x16 mm            | 115x22 mm          | 125x22 mm            |
| Power       | 700 W                | 700 W              | 700 W                |
| Speed       | 12000 rpm            | 12000 rpm          | 12000 rpm            |
| Weight      | 1.4 kg               | 1.5 kg             | 1.5 kg               |
| Hose        | 10 mm                | 10 mm              | 10 mm                |
| Dim. axbxc  | 245x80x125 mm        | 245x80x125 mm      | 245x80x125 mm        |
| Air cons.   | 324 l/min            | 324 l/min          | 324 l/min            |
| Air cons.   | 540 l/min            | 540 l/min          | 540 l/min            |
| Air inlet   | 1/4" IG              | 1/4" IG            | 1/4" IG              |
| Sound LpA   | 84 dB (A)            | 84 dB (A)          | 84 dB (A)            |
| Vibration   | 7,2 m/s <sup>2</sup> | 9 m/s <sup>2</sup> | 9,4 m/s <sup>2</sup> |

For discs 100 to 125 mm

| Model      | RC7190                |
|------------|-----------------------|
| Drive      | 3/8"                  |
| Disc       | 70x10 mm              |
| Power      | 350 W                 |
| Speed      | 20000 rpm             |
| Weight     | 0.8 kg                |
| Hose       | 8 mm                  |
| Dim. axbxc | 195x80x40 mm          |
| Air cons.  | 430 l/min             |
| Air cons.  | 580 l/min             |
| Air inlet  | 1/4" IG               |
| Sound LpA  | 89.5 dB(A)            |
| Vibration  | 3.53 m/s <sup>2</sup> |

Mini cutting discs up to 70 mm



- Compact angle grinders
- With safety speed governor, protective guard and flanges
- Very versatile for many applications such as sanding with flap discs, grinding, cutting
- Available for 16 or 22 mm centre hole accessories or pads and brushes with thread M14x2
- Side handle for additional control can be taken off for confined areas



- 700 W
- 1000 hour service interval
- High quality bevel gears & Governed motor
- Rear exhaust (exhaust hose included)
- Streamline composite handle for either right or left handed operation
- Composite grip insulates operator's hand from cold
- Designed for a variety of applications such as sanding with flap discs, grinding and cutting



- Mini cutting grinder with steel guard and safety lever
- Rear exhaust
- Delivery includes 1 disc

Accessories for RC7160 - RC7166 - RC7172 - RC7173

CUTTING DISCS  
CONTENT 1 PIECE.

| Model | Size   | Part#      | For    |
|-------|--------|------------|--------|
| 115TR | 115 mm | 8951011539 | RC7166 |



Grinders Tune up Kit

| Model        | Part#      |
|--------------|------------|
| RC7171/72/73 | 8950280070 |



Maximum power and optimal speed

Superior durability and performance are granted by the built-in high quality bevel gear with spiral teeth and the governed motor.


Accessories for RC7190

CUTTING DISCS  
CONTENT 1 PIECE



| Model | Size  | Part#      | For    |
|-------|-------|------------|--------|
| 70TR  | 75 mm | 8951011536 | RC7190 |

# CUTTING GRINDER & BELT SANDER



**Model**  
**RC7170**

**Part#**  
**8951000144**

|             |  |                    |
|-------------|--|--------------------|
| Model       |  | RC7170             |
| Drive       |  | 3/8"               |
| Disc x hole |  | 100x10 mm          |
| Power       |  | 746 W              |
| Speed       |  | 14000 rpm          |
| Weight      |  | 1.8 kg             |
| Hose        |  | 10 mm              |
| Dim. axbxc  |  | 75x110x370 mm      |
| Air cons.   |  | 199 l/min          |
| Air cons.   |  | 216 l/min          |
| Air inlet   |  | 1/4" IG            |
| Sound LpA   |  | 86 dB(A)           |
| Vibration   |  | 3 m/s <sup>2</sup> |

**4" extended cutting grinder**



- 4" = 100 mm for better reach and easy access to restricted areas
- Composite grip to reduce cold air transmission to operators
- Spindle lock system for easier wheel changing
- 11 position adjustable swivel guard – 126° adjustable for better operator protection & greater visibility of cutting operations
- Safety throttle lever to prevent accidental start up
- Supplied with 5 cutting wheels

**Model**  
**RC7155**

**Part#**  
**8951072041**

|            |  |                      |
|------------|--|----------------------|
| Model      |  | RC7155               |
| Belt size  |  | 10x330 mm            |
| Power      |  | 300 W                |
| Speed      |  | 18000 rpm            |
| Weight     |  | 0.8 kg               |
| Hose       |  | 8 mm                 |
| Dim. axbxc |  | 285x37x22 mm         |
| Air cons.  |  | 400 l/min            |
| Air cons.  |  | 520 l/min            |
| Air inlet  |  | 1/4" BSP IG          |
| Sound LpA  |  | 79.5 dB(A)           |
| Vibration  |  | 2.5 m/s <sup>2</sup> |

**10 mm belts**



- Small belt sander for confined areas
- Fast-tensioning mechanism allows exchanging of belts one-handed
- For ergonomic working handle can be adjusted in angle
- Delivery includes 3 belts (grid 80, 100 and 120)

## Accessories for RC7155

10 x 330 mm sanding belt, long



Package content 10 pcs.

|                     |            |
|---------------------|------------|
| 10x330 mm grain 40  | 8951011604 |
| 10x330 mm grain 80  | 8951011570 |
| 10x330 mm grain 120 | 8951011577 |
| 10x330 mm grain 180 | 8951011578 |
| 10x330 mm grain 240 | 8951011579 |

**Model**  
**RC7156**

**Part#**  
**8951072051**

|            |  |                      |
|------------|--|----------------------|
| Model      |  | RC7156               |
| Belt size  |  | 20x520 mm            |
| Power      |  | 370 W                |
| Speed      |  | 17000 rpm            |
| Weight     |  | 1.15 kg              |
| Hose       |  | 8 mm                 |
| Dim. axbxc |  | 353x44x35x22 mm      |
| Air cons.  |  | 400 l/min            |
| Air cons.  |  | 520 l/min            |
| Air inlet  |  | 1/4" BSP IG          |
| Sound LpA  |  | 83.2 dB(A)           |
| Vibration  |  | 2.4 m/s <sup>2</sup> |

**20 mm belts**



- Tool can be used 100% into corners since the arm does not disturb on the side of the belt
- Fast-tensioning mechanism allows exchanging of belts one-handed
- Ergonomic working handle can be adjusted to different angles
- Continuous work is made more comfortable due to a broad resting plate for the second hand

## Accessories for RC7156

20 x 520 mm sanding belt, long



Package content 10 pcs.

|                    |            |
|--------------------|------------|
| 20x520mm grain 80  | 8951011580 |
| 20x520mm grain 120 | 8951011581 |
| 20x520mm grain 180 | 8951011582 |
| 20x520mm Korn 240  | 8951011583 |

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16


17

18

19

20












RANDOM ORBITAL SANDER

























Model Part#  
RC7682 8951000005  
RC7682K 8951000018

Model Part#  
RC7661V 8951072231

Model Part#  
RC7200V 8951072111

| Model                    | RC7682  |                            |
|--------------------------|---|----------------------------|
| Disc ø & thread          |  | 50 mm (2") - 75 mm (3") AG |
| Orbit                    |  | 5 mm                       |
| Speed                    |  | 15000 rpm                  |
| Weight                   |  | 0.5 kg                     |
| Hose                     |  | 8 mm                       |
| Dimensions axbxc         |  | 260x165x37 mm              |
| Air cons.                |  | 380 l/min                  |
| Air cons.                |  | 510 l/min                  |
| Air inlet                |  | 1/4" IG                    |
| Sound LpA                |  | 79.6 dB(A)                 |
| Vibration                |  | 8.9 m/s <sup>2</sup>       |
| Combi sander 5 mm stroke |   |                            |

| Model                       | RC7661V   |                      |
|-----------------------------|---|----------------------|
| Disc ø & thread             |  | 77 mm - 5/16" AG     |
| Orbit                       |  | 2.5 mm               |
| Speed                       |  | 10000 rpm            |
| Weight                      |  | 1 kg                 |
| Hose                        |  | 8 mm                 |
| Dimensions axbxc            |  | 260x165x37 mm        |
| Air cons.                   |  | 350 l/min            |
| Air cons.                   |  | 430 l/min            |
| Air inlet                   |  | 1/4" IG              |
| Sound LpA                   |  | 88 dB(A)             |
| Vibration                   |  | 3.5 m/s <sup>2</sup> |
| Stroke 2.5 mm - Spot-Repair |   |                      |

| Model                    | RC7200V   |                      |
|--------------------------|---|----------------------|
| Disc ø & thread          |  | 150 mm - 5/16" AG    |
| Orbit                    |  | 5 mm                 |
| Speed                    |  | 10000 rpm            |
| Weight                   |  | 1.95 kg              |
| Hose                     |  | 8 mm                 |
| Dimensions axbxc         |  | 260x165x37 mm        |
| Air cons.                |  | 315 l/min            |
| Air cons.                |  | 400 l/min            |
| Air inlet                |  | 1/4" IG              |
| Sound LpA                |  | 86.2 dB(A)           |
| Vibration                |  | 8.3 m/s <sup>2</sup> |
| Combi sander 5 mm stroke |   |                      |



- For spot repairs - paint repairs limited to small areas
- Ergonomic composite housing
- Speed regulator with thumb knob for one hand operation
- Air exhaust down motor housing
- 75 mm pad
- 5 mm stroke

RC7682K 8951000018  
Content:

- 1 pistol sander
- 1 velcro pad 50 mm (2")
- 1 velcro pad 75 mm (3")
- 10 abrasives 50 mm grain 600
- 10 abrasives 75 mm grain 600
- 10 abrasives 50 mm grain 320
- 10 abrasives 75 mm grain 320
- 10 abrasives 50 mm grain 180
- 10 abrasives 75 mm grain 180
- 1 tool box



- Spot-repair orbital sander with 2,5 mm stroke and small pad
- Ideal for dust enclosures, irregularities or on very rounded surfaces
- Comfortably rounded shape
- Insulating rubber cover and speed regulator
- Equipped with velcro pad




- Combi-tool for coarse sanding and finishing in one
- Can easily be switched from a rotating coarse sander to a random orbital sander with 5 mm stroke
- Equipped with 150 mm velcro pad

# Ergonomic, powerful, comfortable - all in one hand!



**RC7702V6**












RANDOM ORBITAL SANDER



| Model    | Part#      | Orbit  |
|----------|------------|--------|
| RC7702V6 | 8951000021 | 2.5 mm |
| RC7705V6 | 8951000020 | 5 mm   |
| RC7710V6 | 8951000070 | 10 mm  |

| Model       | Part#      | Orbit |
|-------------|------------|-------|
| RC7705V6-2H | 8951000081 | 5 mm  |
| RC7710V6-2H | 8951000082 | 10 mm |

| Model   | Part#      |
|---------|------------|
| RC7691V | 8951072212 |

| Model           | RC7702V6   | RC7705V6             | RC7710V6           |
|-----------------|--|----------------------|--------------------|
| Disc ø & thread |  150 mm - 5/16" AG    |                      |                    |
| Orbit           |  2.5 mm               | 5 mm                 | 10 mm              |
| Speed           |  10000 rpm            |                      |                    |
| Weight          |  0.825 kg             | 0.85 kg              | 0.945 kg           |
| Hose            |  8 mm                 |                      |                    |
| Dim. axbxc      |  206x107 mm           |                      |                    |
| Air cons.       |  450 l/min            |                      |                    |
| Air cons.       |  550 l/min            |                      |                    |
| Air inlet       |  1/4" IG              |                      |                    |
| Sound LpA       |  79.5 dB(A)           | 86.1 dB(A)           | 79.1 dB(A)         |
| Vibration       |  3.8 m/s <sup>2</sup> | 5.4 m/s <sup>2</sup> | 9 m/s <sup>2</sup> |

Ergonomic design - Velcro pad 150 mm














- 1 hand orbital sander with ergonomic design
- Innovative swivel for exhaust to allow left and right hand work
- Only 107 mm high
- Insulating thermo rubber against cold and for good grip
- Change speed regulator with one hand while working
- Delivered with two interchangeable suction ports with diameters 29 and 27 mm
- Equipped with 150 mm velcro pad with 15 holes

Accessories for RC77..

|          |               |
|----------|---------------|
| RC7702V6 | 2,5 mm stroke |
| RC7705V6 | 5,0 mm stroke |
| RC7710V6 | 10 mm stroke  |



8955000012

| Model           | RC7705V6-2H  | RC7710V6-2H          |
|-----------------|--|----------------------|
| Disc ø & thread |  150 mm - 5/16" AG    |                      |
| Orbit           |  5 mm                 | 10 mm                |
| Speed           |  10000 rpm            |                      |
| Weight          |  1 kg                 | 1.1 kg               |
| Hose            |  8 mm                 |                      |
| Dim. axbxc      |  315x107 mm           |                      |
| Air cons.       |  450 l/min            |                      |
| Air cons.       |  550 l/min            |                      |
| Air inlet       |  1/4" IG              |                      |
| Sound LpA       |  83.5 dB(A)           |                      |
| Vibration       |  5.1 m/s <sup>2</sup> | 7.9 m/s <sup>2</sup> |

Rear exhaust 5 & 10 mm orbit








- 2 hand orbital sander with ergonomic design
- Innovative swivel for exhaust to allow left and right hand work
- Only 107 mm high
- Insulating thermo rubber against cold and for good grip
- Change speed regulator with one hand while working
- Delivered with two interchangeable suction ports with diameters 29 and 27 mm
- Equipped with 150 mm velcro pad with 15 holes
- Rear exhaust
- 5 mm stroke

Accessories for RC77..-2H

|             |               |
|-------------|---------------|
| RC7705V6-2H | 5,0 mm stroke |
| RC7710V6-2H | 10 mm stroke  |



8955000012


| Model            | RC7691V  |
|------------------|--|
| Disc ø & thread  |  200 mm - 6xM4        |
| Orbit            |  5 mm                 |
| Speed            |  10000 (900) rpm      |
| Weight           |  2.1 kg               |
| Hose             |  8 mm                 |
| Dimensions axbxc |  300x120 mm           |
| Air cons.        |  340 l/min            |
| Air cons.        |  420 l/min            |
| Air inlet        |  1/4" IG              |
| Sound LpA        |  88.6 dB(A)           |
| Vibration        |  2.8 m/s <sup>2</sup> |

Composite 200 mm pad



- 200 mm two-hand sanders with powerful 8-vane motor
- Adjustable speed
- Composite material handle
- Motor housing insulated against the transfer of cold – for long sanding operations
- Equipped with a 29 mm suction port for use with central dust extraction
- Orbital sander + rotation: sander that simultaneously rotates the pad as well as moving it on an orbit (geared sanders) – typical for aggressive sanding applications
- Equipped with 200 mm velcro pad with 8 holes 8951012348
- Pad is fixed with 6 bolts


Accessories for RC7691



8951012348



# LINEAR SANDER ACCESSORIES



**Model**    **Part#**  
**RC7500**    **8951072101**

|                  |  |                       |
|------------------|--|-----------------------|
| Model            |  | RC7500                |
| Pad              |  | 65 x 390 C            |
| Stroke           |  | linear 25 mm          |
| Speed            |  | 3500 rpm              |
| Weight           |  | 2.7 kg                |
| Hose             |  | 8 mm                  |
| Dimensions axbxc |  | 400x170 mm            |
| Air cons.        |  | 200 l/min             |
| Air cons.        |  | 250 l/min             |
| Air inlet        |  | 1/4" IG               |
| Sound LpA        |  | 80.1 dB(A)            |
| Vibration        |  | 21.3 m/s <sup>2</sup> |

## Combi sander 5 mm stroke




- Tool makes forward-reverse movements for profiling and sanding of surfaces with lots of filler (e.g. repairs of dented car doors)
- Equipped with a non-perforated long sanding pad and clamps for normal abrasives

## Non-perforated pads



| øPad (mm) | Thread   | Surface |        | Model  | Part#      |
|-----------|----------|---------|--------|--------|------------|
| 50        | 5/16" AG | Velcro  | soft   | JS2K   | 8951011561 |
| 50        | 5/16" AG | Velcro  | medium |        | 8955000007 |
| 75        | 5/16" AG | Velcro  | soft   | JS3WK  | 8951011560 |
| 75        | 5/16" AG | Velcro  | medium |        | 8955000006 |
| 150       | 5/16" AG | Velcro  | soft   | JS6WK  | 8951011566 |
| 150       | 5/8" IG  | Velcro  | soft   | KT-150 | 8951011554 |

## Perforated pads

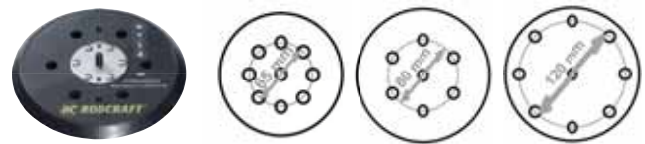

| øPad (mm)<br>Holes | Thread   | Diam. circle of<br>holes (mm) | Surface |           | Model     | Part#       |
|--------------------|----------|-------------------------------|---------|-----------|-----------|-------------|
| 125 / 8            | 5/16" AG | 65                            | Velcro  | medium    | EPA125M8V | 8951011642  |
| 125 / 8            | 5/16" AG | 65                            | Velcro  | very soft | EPA125S8V | 8951011643  |
| 150 / 6            | 5/16" AG | 80                            | Velcro  | soft      | JS6GWK    | 8951011567  |
| 150 / 6            | 5/16" AG | 80                            | Velcro  | hard      | JS6GHKF   | 8951011599  |
| 150 / 6+1          | 5/16" AG | 80                            | Velcro  | hard      | EPA150H6V | 8951011636  |
| 150 / 6+1          | 5/16" AG | 80                            | Velcro  | medium    | EPA150M6V | 8951011638  |
| 150 / 14+1         | 5/16" AG | 80 / 120                      | Velcro  | hard      |           | 8955000012  |
| 200 / 8            | -        | 120                           | Velcro  | very hard |           | 8951012348* |

\* only to be used with RC7691V

## Sanders Tune up Kit

| Model            | Part#      |
|------------------|------------|
| RC7682 SMART REP | 8950280015 |
| RC7682K          | 8950280015 |
| RC7705V6         | 8950280041 |
| RC7702V6         | 8950280041 |
| RC7710V6         | 8950280041 |
| RC7805V6         | 8950280041 |

**Model**     **Part#**  
**7905**     *8951000016*

|                        |                          |
|------------------------|--------------------------|
| Model                  | 7905                     |
| Peak power/<br>Power   | 1400/1200 W              |
| Tank                   | 21 L                     |
| Suction flow           | 215 m³/h - 3583 l/min    |
| Suction height (water) | 2400 mm H <sub>2</sub> O |
| Electr. sockets        | 1x2000 W                 |
| Filter surface         | 2700 cm²                 |
| Dimensions             | 415x415x550 mm           |
| Weight                 | 10 kg                    |
| Air supply pressure    | 4 - 16 bar               |
| Sound LpA              | 65 dB(A)                 |

**Model**     **Part#**  
**7910**     *8951089014*

|                        |                          |
|------------------------|--------------------------|
| Model                  | 7910                     |
| Peak power/<br>Power   | 2600/2300 W              |
| Tank                   | 77 L                     |
| Suction flow           | 430 m³/h - 7150 l/min    |
| Suction height (water) | 2400 mm H <sub>2</sub> O |
| Electr. sockets        | 2x600 W                  |
| Filter surface         | 5700 cm²                 |
| Dimensions             | 608x608x1060 mm          |
| Weight                 | 25,1 kg                  |
| Air supply pressure    | 4 - 15 bar               |
| Sound LpA              | 67 dB(A)                 |

- The dust extraction units comply with class "L" requirements for filters (according to EN 60335-2-69:1999-08)
- The air tools and electrical tools can be attached directly onto the energy supply from the vacuum station
- Automatic stop for vacuum (10 sec delay) after switching off all connected tools. The vacuum hose is emptied, avoiding clogs. Easy remote controlled start of the vacuum system from any connected tool as soon as one of them is started
- Equipped for wet and dry applications with integrated sensor

- Compact version with 21L tank
- 1 motor by-pass cooled
- 1 electrical socket
- 1 suction hose model 7900/10SC
- With nylon bag and class L fleece filter

- 77 L tank
- 2 motors two-step (operation with one motor possible to save energy) – by-pass cooled
- 2 electrical sockets and diverter for 2 suction hoses with nylon bag and class L fleece filter
- Basket for accessories or sander
- Practical joint to tilt the tank for fast and easy emptying
- Sufficient vacuum to work with 2 sanders
- Simultaneously - possible to operate 2 air tools with compressed air when using an additional air diverter model 7910VD (part# 8951011130)



**Accessories 7905 & 7910**

**Model**     **Part#**  
**7910VD**     *8951011130*



compressed air distributor  
with 2 air multi-profile couplers

**Model**     **Part#**  
**7900/10SC**     *8951011102*



5 m suction hose 29 mm

**Model**     **Part#**  
**205SE**     *8951011111*




5 m suction hose 29 mm with integrated air  
supply hose



Accessories for 7905

|               |                   |
|---------------|-------------------|
| Model         | Part#             |
| <b>7900SF</b> | <b>8951011100</b> |

Included in delivery



standard filter  
(polyestervleece class L – 5700 cm²)

|               |                   |
|---------------|-------------------|
| Model         | Part#             |
| <b>7900PB</b> | <b>8951011098</b> |



dust bags made of filter paper  
(5 pcs.)

|                |                   |
|----------------|-------------------|
| Model          | Part#             |
| <b>7900SBP</b> | <b>8951011103</b> |



dust bags made of polyester  
(5 pcs.)

Accessories for 7910

|               |                   |
|---------------|-------------------|
| Model         | Part#             |
| <b>7910SF</b> | <b>8951011101</b> |

Included in delivery



standard filter  
(polyestervleece class L – 5700 cm²)

|               |                   |
|---------------|-------------------|
| Model         | Part#             |
| <b>7910PB</b> | <b>8951011099</b> |



dust bags made of filter paper  
(5 pcs.)

|                |                   |
|----------------|-------------------|
| Model          | Part#             |
| <b>7910SBP</b> | <b>8951011104</b> |



dust bags made of polyester  
(5 pcs.)

|                 |                   |
|-----------------|-------------------|
| Model           | Part#             |
| <b>7900/10K</b> | <b>8951011131</b> |



click-connector (dust extraction unit - hose)

|    |
|----|
| 01 |
| 02 |
| 03 |
| 04 |
| 05 |
| 06 |
| 07 |
| 08 |
| 09 |
| 10 |
| 11 |
| 12 |
| 13 |
| 14 |
| 15 |
| 16 |
| 17 |
| 18 |
| 19 |
| 20 |



**RC7683**

## 09| Polishing

### | Polishers

- Pistol polisher
- Angle polisher

### | Accessories

- Discs
- Sponges
- Woolpads

01

02

03

04

05

06

07

08

**09**

10

11

12

13

14

15

16


17

18

19

20

POLISHERS  
ACCESSORIES



| Model   | Part#      |
|---------|------------|
| RC7683K | 8951000017 |
| RC7683  | 8951000004 |

| Model  | Part#      |
|--------|------------|
| RC7130 | 8951072004 |

Polishing system

|                  |  |                      |
|------------------|--|----------------------|
| Model            | RC7683K / RC7683   |                      |
| Drive            |   | 5/16"-24UNF IG       |
| Disc             |   | 75 mm                |
| Power            |   | 150 W                |
| Speed            |   | 5500 mm              |
| Weight           |   | 0.6 kg               |
| Hose             |   | 8 mm                 |
| Dimensions axbxc |   | 120x125x42 mm        |
| Air cons.        |   | 360 l/min            |
| Air cons.        |   | 480 l/min            |
| Air inlet        |   | 1/4" BSP IG          |
| Sound LpA        |   | 78.5 dB(A)           |
| Vibration        |  | 3.8 m/s <sup>2</sup> |

Direct Drive - Composite



- For spot repairs - paint repairs limited to a small area, saving time and consumables
- Lightweight and handy tool with composite housing
- Speed regulator with thumb knob for one hand operation
- Air exhaust down motor housing

Set RC7683K consists of:

- 1 pistol polisher
- 1 velcro pad 75 mm (3")
- 1 soft sponge white 75 mm (3")
- 1 sponge yellow 75 mm (3")
- 1 wool pad 75 mm (3")



Polishers Tune up Kit

| Model            | Part#      |
|------------------|------------|
| RC7683 SMART REP | 8950280016 |
| RC7683K          | 8950280016 |

|                  |                      |  |
|------------------|----------------------|--|
| Model            | RC7130               |  |
| Drive            | 5/8" AG              |  |
| Disc             | 178 mm               |  |
| Power            | 500 W                |  |
| Speed            | 2500 rpm             |  |
| Weight           | 2 kg                 |  |
| Hose             | 8 mm                 |  |
| Dimensions axbxc | 320x38x100 mm        |  |
| Air cons.        | 525 l/min            |  |
| Air cons.        | 700 l/min            |  |
| Air inlet        | 1/4" IG              |  |
| Sound LpA        | 87.9 dB(A)           |  |
| Vibration        | 6.9 m/s <sup>2</sup> |  |

Flat head pad 178 mm



- 170 mm (7") heavy duty angle polisher with 5/8" spindle and low head height including
- A fully rounded polishing pad diameter 170 mm (7")
- A lamb wool polishing bonnet (to tie with strap)
- Insulated main handle and soft grip side handle
- Rear exhaust
- Aluminum alloy housing, sturdy but lightweight tool
- Quality spiral bevel gearing and grease plug screw for the angle

75 mm velcro 5/16"



Disc  
Part#: 8951011560



Felt  
Part#: 8951011556

150 mm velcro 5/8"



Disc  
Part#: 8951011554



wool (velcro)  
Part#: 8951011586

150-170 mm to tie 5/8"



160 mm

Hard sponge disc  
Part#: 8951011551



170 mm

Disc (rounded)  
Part#: 8951011549



Wool (to tie)  
Part#: 8951011550

# Complete pack for headlights RC7210 Kit Part#8951000296



**Sanding:**  
1 RC7682 with 60 sanding  
papers



**High quality case**  
with removable foam  
compatible with tool  
drawer



**Polishing:**  
1 RC7683 with hard  
and soft sponge and  
polish cream



**Recharge pack (8940174744)**  
20 headlights renew with  
1 recharge pack of accessories



**Perfect finish in 10 mn**



**RC7210**



RC6605

## 10| Car glass removal

### | Glass removal tools

- Oscillating cutter
- Manual glass removal tool
- Single suction cup
- Suction cup set

### | Accessories

- Blades

01

02

03

04

05

06

07

08

09

**10**

11

12

13

14

15

16

17

18


19

20



# CAR GLASS REMOVAL TOOLS

## SUCTION CUPS



**Model** RC6605RE  
**Part#** 8951074005

|                                    |  |                            |
|------------------------------------|--|----------------------------|
| Model                              |  | RC6605RE                   |
| Head Interface                     |  | 2 x hex s = 19 e = 21.9 mm |
| Blade Interface                    |  | e=22 mm                    |
| Oscillations                       |  | 20000 min <sup>-1</sup>    |
| Weight                             |  | 0.8 kg                     |
| Hose                               |  | 8 mm                       |
| Dimension axbxc                    |  | 180x40x67 mm               |
| Air cons.                          |  | 370 l/min                  |
| Air cons.                          |  | 530 l/min                  |
| Air inlet                          |  | 1/4" IG                    |
| Sound LpA                          |  | 79.8 dB(A)                 |
| Vibration                          |  | 5.37 m/s <sup>2</sup>      |
| Oscillating movement 20.000 / min. |  |                            |



- Versatile cutter, scraper and saw called "UNICUTTER"
- Well suited for removal of windscreens and other glued parts
- A silencing exhaust hose system is included in the delivery

**Model** RC6606RE  
**Part#** 8951174000



- Oscillating Cutter (UNICUTTER) Set in tool box including:
- 1 cutter model RC6605RE with silencing exhaust hose system
  - 1 blade model U24
  - 1 blade model U36
  - and keys

\* for reordering only available with content 2 pcs

**Model** RC6610  
**Part#** 8951074000

|                                    |  |                            |
|------------------------------------|--|----------------------------|
| Model                              |  | RC6610                     |
| Head Interface                     |  | 2 x hex s = 19 e = 21.9 mm |
| Blade Interface                    |  | e=22 mm                    |
| Oscillations                       |  | 20000 min <sup>-1</sup>    |
| Weight                             |  | 1.3 kg                     |
| Hose                               |  | 8 mm                       |
| Dimension axbxc                    |  | 180x40x67 mm               |
| Air cons.                          |  | 500 l/min                  |
| Air cons.                          |  | 800 l/min                  |
| Air inlet                          |  | 1/4" IG                    |
| Sound LpA                          |  | 86.9 dB(A)                 |
| Vibration                          |  | 5.38 m/s <sup>2</sup>      |
| Oscillating movement 20.000 / min. |  |                            |



- Large version of model 6605, e.g. for truck and bus windscreens and other glued car glass (without silencing exhaust hose system)



**Model**    **Part#**  
**AGS185**    **8951089055**

## Manual glass removal

- Autoglass kit with square wire for removal of windscreens and rear windows etc.
- Dimension of wire material 0,6 x 0,6 mm
- Includes an angled manual blade with extra pull handle on short cable
- Delivered with wire handles, punch, clip remover level and trim lifting claw

- 50 m wire AGD186

8951011085



**Model**    **Part#**  
**STS70k**    **8951089056**

## Suction cup max. 40 kg

- Single suction cup especially suited for working in confined areas
- Can be used on glass, boards, sheet metal




**Model**    **Part#**  
**STS71K**    **8951011087**

## Suction cup max. 80 kg


- Two double suction cups for transport, assembly
- And disassembly of car windscreens, rear windows
- Self-adapting to the 3 dimensional shape of the glass
- Ratchet strap for fixation of the windscreen for additional safety.

5 m strap  
Spare rubber


8951011088  
8951011090

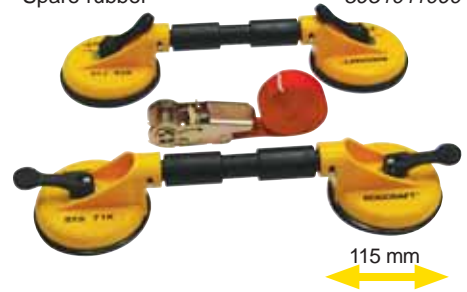


115 mm




**Model**                    **U27**  
**Part Number**            8956001320  
**Cutting Edge length**    24 mm

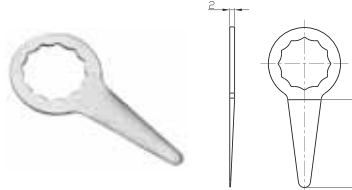


**Model**                    **G36**  
**Part Number**            8956001323  
**Cutting Edge length**    35 mm

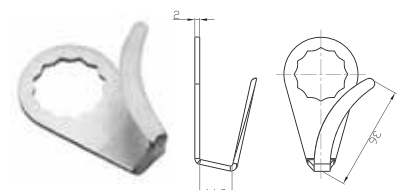


**Model**                    **U37**  
**Part Number**            8956001328  
**Cutting Edge length**    36 mm



**Model**                    **G58**  
**Part Number**            8956001322  
**Cutting Edge length**    53,5 mm

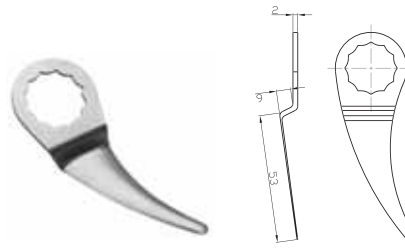


**Model**                    **K28**  
**Part Number**            8956001326  
**Cutting Edge length**    53 mm

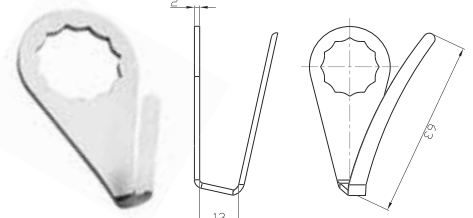

**Model**                    **U64**  
**Part Number**            8956001324  
**Cutting Edge length**    63 mm



**Model**                    **G95**  
**Part Number**            8956001321  
**Cutting Edge length**    90 mm

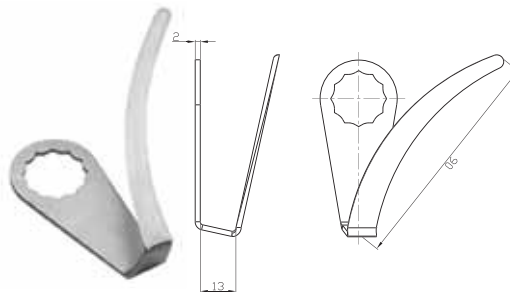

**Model**                    **U95**  
**Part Number**            8956001325  
**Cutting Edge length**    90 mm



**Model**                    **UG-SET**  
**Part Number**            8956001327  
Set of 7 blades for all applications, contains:    U95, U64, U37, U27, G36, G58, G95



RC8106

## 11| Painting

### | Paint guns

- Paints guns 0,125 l cup
- Paints guns 0,6 l cup
- HVLP paint guns

### | Accessories

- Nozzle Sets

01

02

03

04

05

06

07

08

09

10

**11**

12

13

14

15

16


17

18

19

20

PAINT GUNS



Model      Part#  
RC8103-08    8951070012

|                             |  |                        |
|-----------------------------|--|------------------------|
| Model                       |  | RC8103-08              |
| Cup                         |  | 0.125 Litre            |
| Nozzle                      |  | 0.8 mm                 |
| Max. Pressure               |  | 2 bar                  |
| Weight                      |  | 0.45 kg                |
| Hose                        |  | 8 mm                   |
| Dimensions axbxc            |  | 128x240 mm             |
| Air cons.                   |  | 100 l/min              |
| Air cons.                   |  | 140 l/min              |
| Air inlet                   |  | 1/4" AG                |
| Sound LpA                   |  | <70 dB(A)              |
| Vibration                   |  | < 2.5 m/s <sup>2</sup> |
| Pico-Speed - Mini paint gun |  |                        |



- 0,125 L plastic cup
- Equipped with nozzle 0,8 mm
- Adjustable spray pattern (round, wide, swivelling nozzle head)
- Screw to limit paint volume
- Precise dosage trigger
- Air flow valve

Accessories for RC8103



|                       |            |
|-----------------------|------------|
|                       | Part#      |
| Nozzle set 0,5 mm     | 8951011708 |
| Nozzle set 0,8 mm     | 8951011709 |
| Nozzle set 1,0 mm     | 8951011710 |
| Cup 0,125 l incl. lid | 8951011711 |

Model      Part#  
RC8102-14    8951070002

|                  |  |                        |
|------------------|--|------------------------|
| Model            |  | RC8102-14              |
| Cup              |  | 0.6 Litre              |
| Nozzle           |  | 1,4 HVLP mm            |
| Max. Pressure    |  | 2 - 4 bar              |
| Weight           |  | 0.75 kg                |
| Hose             |  | 8 mm                   |
| Dimensions axbxc |  | 180x340 mm             |
| Air cons.        |  | 260 l/min              |
| Air cons.        |  | 370 l/min              |
| Air inlet        |  | 1/4" AG                |
| Sound LpA        |  | <70 dB(A)              |
| Vibration        |  | < 2.5 m/s <sup>2</sup> |
| Rod-Speed 1,4 mm |  |                        |



- 0,6 L plastic cup
- Equipped with nozzle 1,4 mm
- Adjustable spray pattern (round, wide, swivelling nozzle head)
- Screw to limit paint volume
- Precise dosage trigger
- Air flow valve

Also available as:  
RC8102/17 with 1,7 mm nozzle    8951070032  
RC8102/20 with 2,0 mm nozzle    8951070042  
RC8102/25 with 2,5 mm nozzle    8951070052

Accessories for RC8102



|                     |            |
|---------------------|------------|
|                     | Part#      |
| Nozzle set 1,4 mm   | 8951011703 |
| Nozzle set 1,7 mm   | 8951011704 |
| Nozzle set 2,0 mm   | 8951011705 |
| Nozzle set 2,5 mm   | 8951011706 |
| Cup 0,6 l incl. lid | 8951011695 |
| Gasket kit          | 8951011707 |

Model      Part#  
RC8106-13    8951070011


|                          |  |                        |
|--------------------------|--|------------------------|
| Model                    |  | RC8106-13              |
| Cup                      |  | 0.6 Litre              |
| Nozzle                   |  | 1,3 HVLP mm            |
| Max. Pressure            |  | 2 bar                  |
| Weight                   |  | 0.75 kg                |
| Hose                     |  | 8 mm                   |
| Dimensions axbxc         |  | 180x369 mm             |
| Air cons.                |  | 210 l/min              |
| Air cons.                |  | 300 l/min              |
| Air inlet                |  | 1/4" AG                |
| Sound LpA                |  | <70 dB(A)              |
| Vibration                |  | < 2.5 m/s <sup>2</sup> |
| Rod-Speed HVLP - fogless |  |                        |



- RC8102 with paint optimising system "HVLP"
- 0,6 L plastic cup
- Equipped with nozzle 1,3 mm
- Adjustable spray pattern (round, wide, Swivelling nozzle head)
- Screw to limit paint volume
- Precise dosage trigger
- Air flow valve
- Includes mini pressure regulator with gauge












Also available as:  
RC8106/20 with 2,0 mm nozzle    8951070041

Accessories for RC8106



|                      |            |
|----------------------|------------|
|                      | Part#      |
| Nozzle set 1,3 mm:   | 8951011713 |
| Nozzle set 1,7 mm:   | 8951011714 |
| Nozzle set 2,0 mm:   | 8951011715 |
| Cup 0,6 l incl. lid: | 8951011695 |
| Paint filter 1 piece | 8951011707 |
| Regulator with gauge | 8951011716 |

Model      Part#  
RC8107-14    8951070021

|                  |   |             |
|------------------|---|-------------|
| Model            |   | RC8107-14   |
| Cup              |  | 0.6 Litre   |
| nozzle           |  | 1.4 mm HVLP |
| max. Pressure    |  | 3 bar       |
| Weight           |  | 1 kg        |
| Hose             |  | 8 mm        |
| Dimensions axbxc |  | 187x415 mm  |
| Air cons.        |  | 150 l/min   |
| Air cons.        |  | 380 l/min   |
| Air inlet        |  | 1/4" AG     |
| Sound LpA        |  | <70 dB(A)   |
| Vibration        |  | < 2.5 m/s²  |

HVLP tilting cup



- RC8102 with paint optimising system "HVLP"
- 0,6 l plastic cup equipped with nozzle 1,4 mm
- Adjustable spray pattern (round, wide, swivelling nozzle head)
- Screw to limit paint volume
- Precise dosage trigger
- Air flow valve
- Includes mini pressure regulator with gauge
- For working overarm with swivel joint for tilting the cup

Accessories for RC8107



|                      |            |
|----------------------|------------|
|                      | Part#      |
| Nozzle set 1,7 mm    | 8951011718 |
| Nozzle set 2,0 mm    | 8951011719 |
| Cup 0,6 l incl. lid  | 8951011720 |
| Regulator with gauge | 8951011716 |

Painting made easy with various adjustments!



RC8106





RC8241



RFP04G



## 12| Miscellaneous

- | Tyre inflators
- | Sand blasters
- | Vacuum gun
- | Blow guns
- | Underbody coating guns
- | Cleaning gun
- | Cartridge gun
- | Grease guns

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16


17

18

19

20

TYRE INFLATORS



Model RF02G  
Part# 8951011019

|                  |  |                 |
|------------------|--|-----------------|
| Model            |  | RF02G           |
| Max. pressure    |  | 10 bar          |
| Weight           |  | 0.41 kg         |
| Hose             |  | 8 mm            |
| Dimensions axbxc |  | 250 mm          |
| Air cons.        |  | 100 l/min       |
| Air cons.        |  | 300 l/min       |
| Air inlet        |  | 1/4" IG         |
| Nozzle           |  | Tyre valve clip |

Certified tyre inflator with tyre valve clip



- Professional tyre filler with 500 mm hose and valve clip
- Pressure range 0 – 10 bar
- Certified version with analogue 60 mm gauge and anti-shock-rim
- Push-button for tyre pressure release and lever for tyre filling

Model RFP04G  
Part# 8951012306

|                  |  |                 |
|------------------|--|-----------------|
| Model            |  | RFP04G          |
| Max. pressure    |  | 15 bar          |
| Weight           |  | 0.65 kg         |
| Hose             |  | 8 mm            |
| Dimensions axbxc |  | 250x165x70 mm   |
| Air cons.        |  | 160 l/min       |
| Air cons.        |  | 800 l/min       |
| Air inlet        |  | 1/4" IG         |
| Nozzle           |  | Tyre valve clip |

Certified tyre inflator with tyre valve clip



- Pressure range 1 – 11 bar
- Certified shock-resistant version
- Easy to read, large pressure gauge (diameter 80 mm - 10 graduations per bar)
- High filling rate and long 1,5 m hose for comfortable and safe filling even of large tyres
- Equipped with a hanger
- Easy to use broad metal lever for filling and button for pressure release – measuring continuously
- Can also be used for nitrogen

Filling hose 1,5 m 8951012296

Model RFP03DG  
Part# 8951011020

|                  |  |                 |
|------------------|--|-----------------|
| Model            |  | RFP03DG         |
| Max. pressure    |  | 15 bar          |
| Weight           |  | 0.69 kg         |
| Hose             |  | 8 mm            |
| Dimensions axbxc |  | 245 mm          |
| Air cons.        |  | 100 l/min       |
| Air cons.        |  | 375 l/min       |
| Air inlet        |  | 1/4" IG         |
| Nozzle           |  | Tyre valve clip |


Digital



- Pressure range 0 – 12 bar
- Solid metal body
- 3-function-lever (measurement-filling-release)
- Full anti-shock rubber cover like RFG01G
- With electronic pressure sensor and digital display, very easy to read and surpassing the precision requirements of the European Union directive (0,01 bar)
- 3500 hours operation (mixed operation) with 2 x AAA batteries, with battery status indication and auto-start
- Not certifiable



# SAND BLASTERS VACUUM GUN



**Model** RC8113  
**Part#** 8951070023

| Model                     | RC8113                  |
|---------------------------|-------------------------|
| Size of blasting material | 0,4 - 0,8 mm            |
| Volume appr.              | 1 L                     |
| Max. pressure             | 6 - 8 min <sup>-1</sup> |
| Weight                    | 0.9 kg                  |
| Hose                      | 8 mm                    |
| Dimensions axbxc          | 255X223 mm              |
| Air cons.                 | 190 l/min               |
| Air cons.                 | 330 l/min               |
| Nozzle                    | 6 mm                    |
| Air inlet                 | 1/4" AG                 |

For small areas with vacuum & bag



- Small sand blaster with recovery of the blasting material through self-induced suction and collection bag
- With 5 different sorts of nozzles for concave and convex corners, brush nozzle, spot blasting nozzle and nozzle for sand blasting of larger surfaces in stripes
- Includes a bottle of 0,8 kg copper slag blasting material

**Model** RC8112  
**Part#** 8951070003

| Model                     | RC8112                |
|---------------------------|-----------------------|
| Size of blasting material | 0,4 - 0,8 mm          |
| Volume appr.              | 10 L                  |
| Max. pressure             | 6.7 min <sup>-1</sup> |
| Weight                    | 2.35 kg               |
| Hose                      | 8 mm                  |
| Dimensions axbxc          | 157x150x250x500 mm    |
| Air cons.                 | 170 l/min             |
| Air cons.                 | 240 l/min             |
| Nozzle                    | 5 mm                  |
| Air inlet                 | 1/4" AG               |

Portable 10 L tank



- Sand blaster for mobile use
- only with compressed air
- With portable blasting material container (10 l) and long hose (5 m) for connection of container and gun
- The blasting material has to have particle sizes 0,4 – 0,8 mm and it should be dry without clogs
- Note:
- The small hole on the fitting at the tank is always kept open for an optimum air suction flow

## Accessories for RC8112

|                          | Part#      |
|--------------------------|------------|
| Ceramic nozzle (5 pcs.): | 8951011689 |
| Gun:                     | 8951011690 |

**Model** RC8116  
**Part#** 8951070004

| Model            | RC8116    |
|------------------|-----------|
| Max. pressure    | 6 bar     |
| Weight           | 0.6 kg    |
| Hose             | 8 mm      |
| Dimensions axbxc | 250 mm    |
| Air cons.        | 330 l/min |
| Air cons.        | 480 l/min |
| Air inlet        | 1/4" IG   |

Vacuum System & blow gun in 1



- Removes sharp parts (shards of glass)
- Vacuums even electrically conducting dust (metal dust) or pumps water over little differences in height (emptying cars)
- Blow gun for gentle air pressure but high flow e.g. for cooling, drying
- Metal body with 4 different nozzles, suction hose and dust bag made of textile

## Accessories for RC8116

|                             | Part#      |
|-----------------------------|------------|
| Nozzle set, (flat & round): | 8951011684 |
| Brush nozzle:               | 8951011688 |
| Suction hose:               | 8951011683 |
| Dust bag:                   | 8951011686 |

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16


17

18

19

20

BLOW GUNS



Model     Part#  
RC8120    8951070014

|                  |  |            |
|------------------|--|------------|
| Model            |  | RC8120     |
| Max. pressure    |  | 2-15 bar   |
| Weight           |  | 0.2 kg     |
| Hose             |  | 8 mm       |
| Dimensions axbxc |  | 140x145 mm |
| Air cons.        |  | 130 l/min  |
| Air cons.        |  | 190 l/min  |
| Air inlet        |  | 1/4" IG    |
| Nozzle           |  | 2 mm       |

In aluminium



- Short and handy aluminium version
- 2 mm nozzle

Model     Part#  
RC8240    8955000026


|                  |  |            |
|------------------|--|------------|
| Model            |  | RC8240     |
| Weight           |  | 0.1 kg     |
| Hose             |  | 8 mm       |
| Dimensions axbxc |  | 191x134 mm |
| Air cons.        |  | 290 l/min  |
| Air cons.        |  | 432 l/min  |
| Air inlet        |  | 1/4" IG    |
| Sound Lpa        |  | 78.2 dB(A) |
| Nozzle           |  | 2 mm       |

Soft start valve



- Made of durable high quality materials, manufactured with precision
- High air flow even at low pressure
- Tough composite housing insulates against cold air
- With soft TPR-rubber area on the lever
- Ergonomic handle-lever for reduced stress to the user
- Very sturdy air inlet with threaded brass insert

BLOW GUNS



Model RC8240S Part# 8955000009

|                  |  |               |
|------------------|--|---------------|
| Model            |  | RC8240S       |
| Weight           |  | 0.12 kg       |
| Hose             |  | 8 mm          |
| Dimensions axbxc |  | 191x134 mm    |
| Air cons.        |  | 220 l/min     |
| Air cons.        |  | 329 l/min     |
| Air inlet        |  | 1/4" IG       |
| Sound Lpa        |  | 75.1 dB(A)    |
| Nozzle           |  | Safety nozzle |
| Safety nozzle    |  |               |



- Made of durable high quality materials, manufactured with precision
- High air flow even at low pressure
- Tough composite housing insulates against cold air
- With soft TPR-rubber area on the lever
- Ergonomic handle-lever for reduced stress to the user
- Very sturdy air inlet with threaded brass insert
- Soft safety nozzle prevents scratching painted surfaces and injuries
- More silent and powerful than standard nozzle

Model RC8241 Part# 8955000010

|                  |  |            |
|------------------|--|------------|
| Model            |  | RC8241     |
| Weight           |  | 0.13 kg    |
| Hose             |  | 8 mm       |
| Dimensions axbxc |  | 191x134 mm |
| Air cons.        |  | 310 l/min  |
| Air cons.        |  | 463 l/min  |
| Air inlet        |  | 1/4" IG    |
| Sound Lpa        |  | 79.5 dB(A) |
| Nozzle           |  | 4 mm       |
| Long tube        |  |            |



- Made of durable high quality materials, manufactured with precision
- High air flow even at low pressure
- Tough composite housing insulates against cold air
- With soft TPR-rubber area on the lever
- Ergonomic handle-lever for reduced stress to the user
- Very sturdy air inlet with threaded brass insert

Model RC8241S Part# 8955000011

|                  |  |               |
|------------------|--|---------------|
| Model            |  | RC8241S       |
| Weight           |  | 0.14 kg       |
| Hose             |  | 8 mm          |
| Dimensions axbxc |  | 294x151 mm    |
| Air cons.        |  | 235 l/min     |
| Air cons.        |  | 352 l/min     |
| Air inlet        |  | 1/4" IG       |
| Sound Lpa        |  | 73.4 dB(A)    |
| Nozzle           |  | Safety nozzle |
| Safety nozzle    |  |               |



- Made of durable high quality materials, manufactured with precision
- High air flow even at low pressure
- Tough composite housing insulates against cold air
- With soft TPR-rubber area on the lever
- Ergonomic handle-lever for reduced stress to the user
- Very sturdy air inlet with threaded brass insert
- Soft safety nozzle prevents scratching painted surfaces and injuries
- More silent and powerful than standard nozzle

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16

17

18

19

20

| Model   | Part#      | Nipple     |
|---------|------------|------------|
| RC8500  | 8951011022 | ISO 6150 B |
| RC8502  | 8951011024 | DIN 7.2    |
| RC8502N | 8951012217 | DIN 7.2    |

| Model  | Part#      |
|--------|------------|
| RC8010 | 8951070030 |

| Model  | Part#      |
|--------|------------|
| RC8011 | 8951070040 |

|                  |                 |
|------------------|-----------------|
| Model            | RC8500          |
| Max. pressure    | 12 bar          |
| Weight           | 0.02 kg         |
| Hose             | 8 mm            |
| Dimensions axbxc | 109x10 mm       |
| Air cons.        | 220 l/min       |
| Air cons.        | 300 l/min       |
| Air inlet        | EURO 7.2-7.4 IG |
| Nozzle           | 3 mm            |

Pocket size blow gun



- Ideal personal equipment for each mechanic
- Can be kept in your pocket for quick and easy access
- Made of high resistance anodised aluminium
- With adjustable air flow (nozzle ring) and clip

|  |                            |
|--|----------------------------|
| Different nipple profiles are available: |                            |
| RC8500                                   | ISO 6150 B (MIL-C-4109)    |
| RC8501                                   | ISO 6150 C (Stäubli)       |
| RC8502                                   | DIN 7.2-7.4 (Euro profile) |
| RC8503                                   | British (PCL)              |
| RC8504                                   | ARO 210 (Orion)            |

|                  |            |
|------------------|------------|
| Model            | RC8010     |
| Container        | 1 L        |
| Weight           | 0.6 kg     |
| Hose             | 8 mm       |
| Dimensions axbxc | 250x160 mm |
| Air cons.        | 210 l/min  |
| Air cons.        | 300 l/min  |
| Air inlet        | 1/4" IG    |

For 1 litre bottles



- Underbody coating gun for standard 1 L containers to screw under the gun

Accessories for RC8010

|         |                  |
|---------|------------------|
| Nozzle: | Part# 8951011694 |
|---------|------------------|

|                  |            |
|------------------|------------|
| Model            | RC8011     |
| Container        | 1 L        |
| Weight           | 0.8 kg     |
| Hose             | 8 mm       |
| Dimensions axbxc | 250x160 mm |
| Air cons.        | 210 l/min  |
| Air cons.        | 300 l/min  |
| Air inlet        | 1/4" IG    |

For 1 litre bottles









- Underbody coating gun for standard 1 L containers to screw under the gun
- Including 2 nozzles & suction tubes

Accessories for RC8011

|                         |                  |
|-------------------------|------------------|
| Nozzle+tube (3 pieces): | Part# 8951011679 |
|-------------------------|------------------|

UNDERBODY COATING GUNS,  
CLEANING GUN

Model     Part#  
RC8035    8951070050









|                  |   |            |
|------------------|---|------------|
| Model            |   | RC8035     |
| Container        |   | 1 L        |
| Weight           |  | 0.4 kg     |
| Hose             |  | 8 mm       |
| Dimensions axbxc |   | 250x180 mm |
| Air cons.        |  | 230 l/min  |
| Air cons.        |  | 330 l/min  |
| Nozzle           |  | 5 mm       |
| Air inlet        |  | 1/4" IG    |

4 in 1 gun



- One gun for multiple applications:
  - 1. underbody coating gun. For standard 1 l bottles / cans with thread
  - 2. cavity coating gun. With long nozzle tube for 1 l containers
  - 3. cleaning gun. Using the 1 l tank and the long nozzle tube with adjustable nozzle ring
  - 4. disinfection gun. For air conditioning systems and air channels in the car when using the tank and the long nozzle hose

Model     Part#  
RC8115    8951070034







|                  |   |            |
|------------------|---|------------|
| Model            |   | RC8115     |
| Volume appr.     |  | 1 L        |
| Max. pressure    |  | 2-15 bar   |
| Weight           |  | 0.5 kg     |
| Hose             |  | 8 mm       |
| Dimensions axbxc |   | 374x200 mm |
| Air cons.        |  | 230 l/min  |
| Air cons.        |  | 330 l/min  |
| Air inlet        |  | 1/4" IG    |
| Nozzle           |  | 5 mm       |

Cleaning gun



- Cleaning spray gun
- With long nozzle tube
- Adjustable spraying nozzle
- Including 1 l tank

Model     Part#  
RC8000    8951070000

|                  |   |                        |
|------------------|---|------------------------|
| Model            |   | RC8000                 |
| Cartridge        |  | 50 x 220 (310 ml)      |
| Weight           |  | 1.1 kg                 |
| Hose             |  | 8 mm                   |
| Dimensions axbxc |   | 305x167 mm             |
| Air cons.        |  | 0.8 l/min              |
| Air inlet        |  | 1/4" IG                |
| Vibration        |  | < 2.5 m/s <sup>2</sup> |

Steel version



- Robust cartridge gun with steel cylinder for cartridges up to 310 ml and up to a size of 220 x 50 mm
- Adjustable air flow and pressure release valve for precise stopping of the material flow without dropping
- For sealants, silicones, one component glues, cements, fillers, grease in aluminium, cardboard and plastic cartridges

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16

17


18

19







20



GREASE GUNS



| Model  | Part#      |
|--------|------------|
| RC8118 | 8951011018 |

|                  |   |
|------------------|---|
| Model            | RC8118  |
| Volume appr.     |  0.6 Liter |
| Max. pressure    |  9 bar     |
| Weight           |  0.15 kg   |
| Hose             |  8 mm      |
| Dimensions axbxc |  263x35 mm |
| Nozzle           |  mini      |

Refillable spray can 0,6 L











- Spray bottle that can be refilled and recharged with compressed air
- With safety valve and fitting to fill
- Can be refilled with solvents, corrosion protection, lubricants and cleaners or simply with clean compressed air for using it like a blow gun for cleaning
- Max. pressure 9 bar
- Includes 4 different nozzle heads
- The ecological alternative

Accessories for RC8118

|                   |            |
|-------------------|------------|
| Nozzle set 4 pcs: | Part#      |
| Spray head        | 8951011697 |
|                   | 8951011698 |

| Model  | Part#      |
|--------|------------|
| RC8132 | 8951000059 |









|                                     |  |
|-------------------------------------|--|
| Model                               | RC8132   |
| Output pressure (Compression ratio) | 170 bar  |
| Flow rate                           |  0.4 g/stroke |
| Max. pressure                       |  8 bar        |
| Weight                              |  1.53 kg      |
| Hose                                |  8 mm         |
| Dimensions axbxc                    |  264x328 mm   |
| Air cons.                           |  3 l / hub    |
| Air cons.                           |  3 l / hub    |
| Air inlet                           |  1/4" IG      |

Single stroke cartridges & loose grease



- Grease gun for cartridges 215 x 50 mm and for loose grease (max. 400 ml)
- Single stroke output
- Only a small portion of grease is pressed out with every push (appr. 4g)
- Delivery includes a rigid nozzle
- Tube l = 116 mm and a high-pressure flexible
- Hose l = 270 mm
- Nose: M10x1,0

| Model  | Part#      |
|--------|------------|
| RC8141 | 8951070090 |

|                                     |   |
|-------------------------------------|---|
| Model                               | RC8141  |
| Output pressure (Compression ratio) | 260 bar   |
| Flow rate                           |  64 cm³/min continuously |
| Max. pressure                       |  8 bar                   |
| Weight                              |  1.6 kg                  |
| Hose                                |  8 mm                    |
| Dimensions axbxc                    |  260x328 mm              |
| Air cons.                           |  90 l/min                |
| Air cons.                           |  110 l/min               |
| Air inlet                           |  1/4" IG                 |

Continuously cartridges & loose grease



- Grease gun with cold-insulated handle
- For cartridges 215 x 50 mm (400 ml) but also for loose grease
- Delivers grease continuously as long as the trigger is pushed
- Includes a rigid nozzle tube and a high-pressure flexible
- Hose (c = 225 mm)
- Nose: M10x1,0

## 13| Accessories

### Magnetic dishes

Ideal storage for small parts e.g. screws, nuts etc. Applicable in every position including overarm. All magnetic dishes are made of stainless steel. Magnets with rubber cover to avoid scratches.

#### Round



**Model** Part#  
**MAGT1** 8951011488

|              |          |
|--------------|----------|
| Dimension    | ø 150 mm |
| Magnet diam. | 63 mm    |
| Weight       | 0,3 kg   |

#### Short, square



**Model** Part#  
**MAGT2** 8951011489

|              |              |
|--------------|--------------|
| Dimensions   | 240 x 140 mm |
| Magnet diam. | 2 x 83 mm    |
| Weight       | 0,67 kg      |

#### Long, square



**Model** Part#  
**MAGT3** 8951011490

|              |              |
|--------------|--------------|
| Dimensions   | 360 x 160 mm |
| Magnet diam. | 3 x 83 mm    |
| Weight       | 0,99 kg      |

### Silencing exhaust hose systems (DUS)



DUS hoses are a system existing of an air supplying hose for the tool and an overlying hose which deflects the outcoming air from the operator and prevents oil and coldness.

| Hose system | Part#      |
|-------------|------------|
| DUS 20      | 8951011866 |
| DUS 21      | 8951011867 |
| DUS 23      | 8951011869 |
| DUS 24      | 8951011870 |
| DUS 25      | 8951011871 |
| DUS 26      | 8951011872 |
| DUS 28      | 8951011874 |
| DUS 35      | 8955000015 |

Tools with "RE" in the model name are already equipped with a DUS exhaust system.

### Maintenance units (5 micron)

With aluminium frame and composite bowls, the new range of RC FRLs is the right product to increase the tool's life. The standard 5 microns filter will guarantee that no impurities dust or water will reach your tool. The semi automatic filter makes it very easy to clean your system whenever you want. The screwed gauge is well protected against impact and is always at the right position.

| Port Size                | 1/4"                 |
|--------------------------|----------------------|
| BSP Part Number          | 8951000162           |
| Body Material            | Aluminum die-cast    |
| Bowl Material            | Polycarbonate        |
| Filtration               | 5 microns            |
| Proof pressure           | 15 bar               |
| Max air flow (l/min)     | 2080                 |
| Filter bowl capacity     | 105 ml               |
| Lubricator bowl capacity | 125 ml               |
| Drain                    | Semi automatic drain |
| Weight                   | 2 kg                 |



| Port Size                | 1/2"                 |
|--------------------------|----------------------|
| BSP Part Number          | 8951000164           |
| Body Material            | Aluminum die-cast    |
| Bowl Material            | Polycarbonate        |
| Filtration               | 5 microns            |
| Proof pressure           | 15 bar               |
| Max air flow (l/min)     | 2600                 |
| Filter bowl capacity     | 105 ml               |
| Lubricator bowl capacity | 125 ml               |
| Drain                    | Semi automatic drain |
| Weight                   | 2 kg                 |

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16

17

18

19


20

# Clean air, clean work



**FRL**

## Hose reels

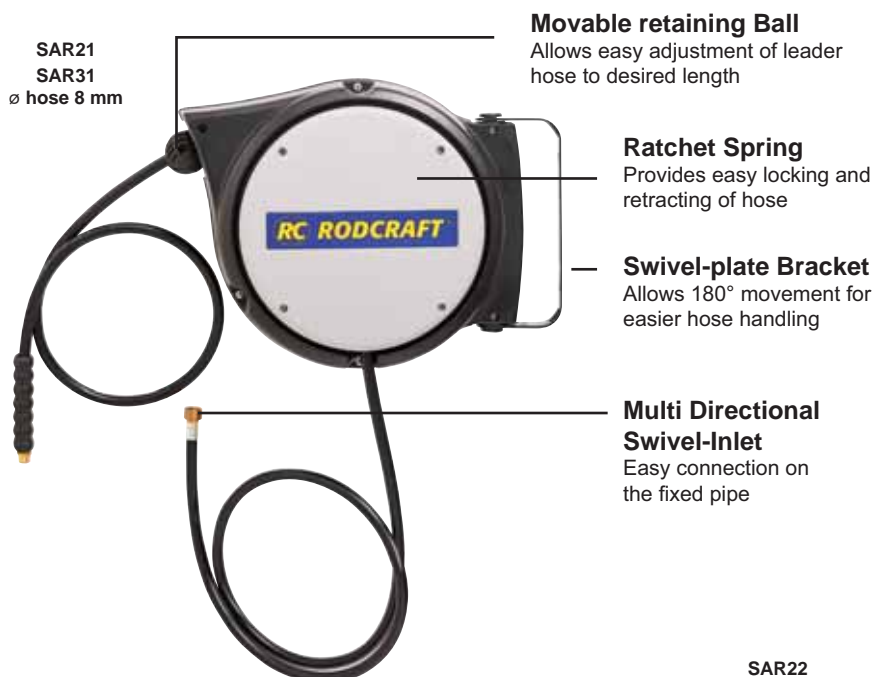

SAR22  
SAR32  
ø hose 10 mm



| Model         | SAR21 (BSP)  |
|---------------|--------------|
| Part Number   | 8951000148   |
| Hose diameter | 8 mm (5/16") |
| Material      | Composite    |
| Type          | Closed       |
| Thread        | 1/4"         |
| Hose Length   | 10 m         |

| Model         | SAR31 (BSP)  |
|---------------|--------------|
| Part Number   | 89510000150  |
| Hose diameter | 8 mm (5/16") |
| Material      | Aluminum     |
| Type          | Closed       |
| Thread        | 1/4"         |
| Hose Length   | 10 m         |

| Model         | SAR22 (BSP)  |
|---------------|--------------|
| Part Number   | 8951000149   |
| Hose diameter | 10 mm (3/8") |
| Material      | Composite    |
| Type          | Closed       |
| Thread        | 3/8"         |
| Hose Length   | 16 m         |

| Model         | SAR32 (BSP)  |
|---------------|--------------|
| Part Number   | 8951000151   |
| Hose diameter | 10 mm (3/8") |
| Material      | Aluminum     |
| Type          | Closed       |
| Thread        | 3/8"         |
| Hose Length   | 16 m         |

## Power regulator<sup>12</sup>



|       |         |                  |
|-------|---------|------------------|
| Model | AR1     | Part# 8951011858 |
| In    | 1/4" IG |                  |
| Out   | 1/4" AG |                  |

## Swivel air joint<sup>1</sup>



|       |         |                  |
|-------|---------|------------------|
| Model | DG1     | Part# 8951011859 |
| In    | 1/4" IG |                  |
| Out   | 1/4" AG |                  |

## Inline lubricator<sup>1</sup>



|       |         |                  |
|-------|---------|------------------|
| Model | G1K     | Part# 8951011851 |
| In    | 1/4" IG | capacity = 4 ml  |
| Out   | 1/4" AG |                  |

|       |                  |                  |
|-------|------------------|------------------|
| Model | G1G <sup>3</sup> | Part# 8951011852 |
| In    | 1/4" IG          | capacity = 28 ml |
| Out   | 1/4" AG          |                  |

|       |                 |                  |
|-------|-----------------|------------------|
| Model | G2 <sup>3</sup> | Part# 8951011853 |
| In    | 3/8" IG         | capacity = 28 ml |
| Out   | 3/8" IG         |                  |

|       |                 |                  |
|-------|-----------------|------------------|
| Model | G3 <sup>3</sup> | Part# 8951011854 |
| In    | 1/2" AG         | capacity = 28 ml |
| Out   | 1/2" AG         |                  |

|       |         |                  |
|-------|---------|------------------|
| Model | G1M     | Part# 8951011856 |
| In    | 1/4" IG | capacity = 12 ml |
| Out   | 1/4" AG |                  |

## Inline filter<sup>1</sup>



|       |         |                  |
|-------|---------|------------------|
| Model | F1G     | Part# 8951011855 |
| In    | 1/4" IG |                  |
| Out   | 1/4" AG |                  |

<sup>1</sup> For connection into tool air inlet

<sup>2</sup> Reduces power and speed

<sup>3</sup> Adjustable





## Balancers & hose balancers

- Stainless steel cable
- The stroke can be limited in retraction for optimum position to grab the load - simple adjustable clamp
- Cable runs in low friction material
- Fast and easy exchange of the spring package due to modular design
- Robust casted aluminium body (closed two piece construction (see A)
- Precisely adjustable balancing force (spring tension) for minimum pull resistance (grabbing) and easy setting of the balancing point
- With additional safety suspension

### Info:

- A aluminium casted body (closed two piece construction), upper suspension with safety hook running on ball bearing, tapered drum with ball bearing for even pull force for balancing effect over full stroke after grabbing the load
- B equipped with a safety lock system against drop in case of a spring breakage (for capacities over 3 kg minimum load)
- C permanently visible cable for fast security checks  
hook on upper suspension can be aligned  
Stop system to position the load at any height ("STOP")



## Balancers

| Model | Part#:     | Capacity kg | Stroke mm | Info |
|-------|------------|-------------|-----------|------|
| 9311  | 8951011260 | 0,4-1,0     | 1600      |      |
| 9312  | 8951011261 | 1,0-2,0     | 1600      |      |
| 9313  | 8951011262 | 2,0-3,0     | 1600      |      |
| 9320  | 8951011263 | 1,0-2,5     | 2000      | B    |
| 9321  | 8951011264 | 2,0-4,0     | 2000      | B    |
| 9322  | 8951011265 | 4,0-6,0     | 2000      | B    |
| 9323  | 8951011266 | 6,0-8,0     | 2000      | B    |
| 9336  | 8951011267 | 2,0-4,0     | 2500      | B    |
| 9337  | 8951011268 | 4,0-6,0     | 2500      | B    |
| 9338  | 8951011269 | 6,0-8,0     | 2500      | B    |
| 9339  | 8951011270 | 8,0-10,0    | 2500      | B    |
| 9340  | 8951011271 | 10,0-14,0   | 2500      | B    |



## Balancers with stop function

| Model | Part#:     | Capacity kg | Stroke mm | Info |
|-------|------------|-------------|-----------|------|
| 9346  | 8951011272 | 2,0-4,0     | 2500      | B,C  |
| 9347  | 8951011273 | 4,0-6,0     | 2500      | B,C  |
| 9348  | 8951011274 | 6,0-8,0     | 2500      | B,C  |
| 9349  | 8951011275 | 8,0-10      | 2500      | B,C  |



## Balancers

| Model | Part#:     | Capacity kg | Stroke mm | Info |
|-------|------------|-------------|-----------|------|
| 9354  | 8951011276 | 4,0-7,0     | 2000      | A,B  |
| 9355  | 8951011277 | 7,0-10      | 2000      | A,B  |
| 9356  | 8951011278 | 10-14       | 2000      | A,B  |
| 9357  | 8951011279 | 14-18       | 2000      | A,B  |
| 9358  | 8951011280 | 18-22       | 2000      | A,B  |
| 9364  | 8951011285 | 25-30       | 2000      | A,B  |
| 9366  | 8951011287 | 35-45       | 2000      | A,B  |
| 9367  | 8951011288 | 45-55       | 2000      | A,B  |
| 9369  | 8951011290 | 65-75       | 2000      | A,B  |



## Hose balancers

| Model | Part#:     | Capacity kg | Stroke mm | Thread |
|-------|------------|-------------|-----------|--------|
| 9200  | 8951011256 | 0,7-0,8     | 1350      | 1/4"   |
| 9201  | 8951011257 | 0,75-1,5    | 1350      | 1/4"   |
| 9202  | 8951011258 | 1,2-2,5     | 1350      | 1/4"   |



hoses made of polyurethane (hose instead of a cable) / 8 bar max. operating pressure / outer hose diameter 7,8 mm

01  
02  
03  
04  
05  
06  
07  
08  
09  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20

### Safety series 7.2 mm (Euro-profile)

#### Patented Composite - Safety Couplings

(EURONORM and ISO safety standard)

- Robust design with low weight
- Safety system (2 movements with pressure release)
- Very high flow rate (even at 6,3 bar using 7,2 mm diameter series approx. 1700 l/min)
- New technology: extremely air proof, low force coupling, reduced danger of scratching paint due to composite elements, industrial gasket system with nitrile O-rings
- Excellent material quality: shock resistant, low wear, squeeze-proof design
- 10 times higher life time than standard couplings
- Galvanised steel thread fittings, male threads ready to seal with teflon coating
- Plug made of steel with anti-stain coating, male threads ready to seal with teflon coating
- Several plug-coupling profiles available EURO/DIN 7.2 mm - 7.4 mm, SO 6150 B, MIL 409 C (6 mm) and 8 mm high-flow format
- With check valve

#### Coupling with thread



| Model | Dimension | Part#:     |
|-------|-----------|------------|
| SK703 | 1/2" AG   | 8951011742 |
| SK704 | 1/4" IG   | 8951011743 |
| SK705 | 3/8" IG   | 8951011744 |
| SK706 | 1/2" IG   | 8951011745 |

AG = outer thread

IG = inner thread

#### Coupling for hoses




| Model | Dimension   | Part#:     |
|-------|-------------|------------|
| SK707 | ø 6 - 7 mm  | 8951011746 |
| SK708 | ø 8 mm      | 8951011747 |
| SK709 | ø 9 - 10 mm | 8951011748 |
| SK713 | ø 13 mm     | 8951011750 |

#### Diverter with couplings




| Model | Dimension | Part#:     |
|-------|-----------|------------|
| SK760 | 1/4" IG   | 8951011762 |
| SK761 | 3/8" IG   | 8951011763 |
| SK762 | 1/2" IG   | 8951011764 |

#### Plug with thread



| Model | Dimension | Part#:     |
|-------|-----------|------------|
| SK728 | 1/4" AG   | 8951011756 |
| SK729 | 3/8" AG   | 8951011757 |
| SK730 | 1/2" AG   | 8951011758 |
| SK731 | 1/4" IG   | 8951011759 |
| SK732 | 3/8" IG   | 8951011760 |
| SK734 | 1/2" IG   | 8951011761 |

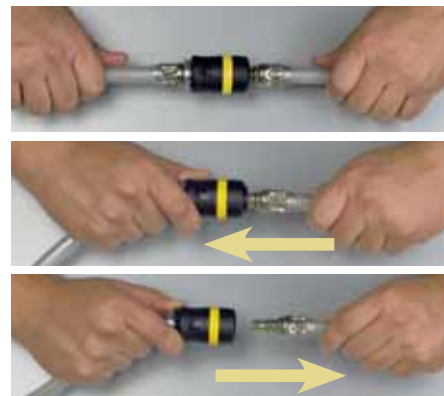

#### Safety System

First step:

the valve stops the air flow, pressure is released from plug side of the air line i.e. no danger of lashing out hose tails (pull)

Second step:

complete separation of the connection without pressure (press) i.e. no danger

#### Plug for hoses




| Model | ø Hose inner | Part#:     |
|-------|--------------|------------|
| SK716 | ø 6 - 7 mm   | 8951011751 |
| SK718 | ø 8 mm       | 8951011752 |
| SK719 | ø 9 mm       | 8951011753 |
| SK720 | ø 10 mm      | 8951011754 |



## Brass claw couplings

For very high flow rates (use valve upstream for safety, does not contain a check valve) typical for air connections to construction site compressors



## Coupling with thread

| Model  | Dimension | Part#:     |
|--------|-----------|------------|
| KKG1/2 | 1/2" AG   | 8951011816 |
| KKG3/4 | 3/4" AG   | 8951011817 |



## Brass standard 7,2 mm

Solid version with high flow rate for daily use  
With check valve

## Coupling with thread



| Dimension   | Part#:     |
|-------------|------------|
| BSP 1/4" AG | 8951011784 |
| BSP 3/8" AG | 8951011785 |
| BSP 1/2" AG | 8951011786 |
| BSP 1/4" IG | 8951011787 |
| BSP 3/8" IG | 8951011788 |
| BSP 1/2" IG | 8951011789 |

## Coupling for hoses



| Dimension   | Part#:     |
|-------------|------------|
| ø 6 - 7 mm  | 8951011790 |
| ø 9 - 10 mm | 8951011791 |
| ø 13 mm     | 8951011792 |

## Diverter with coupling



| Dimension     | Part#:     |
|---------------|------------|
| 3/8" IG 2-Weg | 8951011819 |
| 3/8" IG 3-Weg | 8951011820 |

## Plug for hoses



| ø Hose inner | Part#:     |
|--------------|------------|
| ø 6 - 7 mm   | 8951011795 |
| ø 9 mm       | 8951011796 |
| ø 13 mm      | 8951011797 |

AG = outer thread


IG = inner thread

## Plug with thread



| Dimension           | Part#:     |
|---------------------|------------|
| BSP 1/4" AG (Steel) | 8951011808 |
| BSP 1/4" AG         | 8951011809 |
| BSP 3/8" AG         | 8951011810 |
| BSP 1/2" AG         | 8951011811 |
| BSP 1/4" IG         | 8951011812 |
| BSP 3/8" IG         | 8951011813 |
| BSP 1/2" IG         | 8951011814 |

## Hose stems



| Dimension   | ø Hose inner | Part#:     |
|-------------|--------------|------------|
| BSP 1/4" AG | 6 mm         | 8951011801 |
| BSP 1/4" AG | 9 mm         | 8951011802 |
| BSP 3/8" AG | 9 mm         | 8951011803 |
| BSP 3/8" AG | 13 mm        | 8951011804 |
| BSP 1/2" AG | 13 mm        | 8951011805 |
| BSP 1/2" AG | 9 mm         | 8951011806 |

## Threaded connectors



| Dimension 1 | Dimension 2 | Part#:     |
|-------------|-------------|------------|
| 1/4" AG     | 1/4" AG     | 8951011822 |
| 3/8" AG     | 1/4" AG     | 8951011824 |
| 3/8" AG     | 3/8" AG     | 8951011821 |
| 1/2" AG     | 3/8" AG     | 8951011825 |
| 1/2" AG     | 1/2" AG     | 8951011827 |
| 3/8" AG     | 1/4" IG     | 8951011823 |
| 1/2" AG     | 3/8" IG     | 8951011828 |
| 1/2" AG     | 1/4" IG     | 8951011839 |

## Hose connector



| Dimension | inner hose ø | Part#:     |
|-----------|--------------|------------|
| ø 6 mm    | 6 mm         | 8951011798 |
| ø 9 mm    | 9 mm         | 8951011799 |
| ø 13 mm   | 13 mm        | 8951011800 |

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16

17

18

19

20



RH215

## 14| Trolley Jacks

- | Aluminium hydraulic trolley jacks for cars
- | Hydraulic trolley jacks
- | Balloon jacks
- | Air-hydraulic jacks for trucks & vans
- | Bottle jacks
- | Jack stands

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16


17

18

19

20

HYDRAULIC TROLLEY JACKS

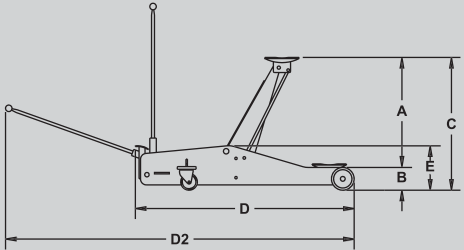

**Model**    **Part#**  
**RH135**    **8951082025**

|                |         |
|----------------|---------|
| Model          | RH135   |
| Capacity       | 1.3 t   |
| Weight         | 10.5 kg |
| Dimensions:    |         |
| A              | 295 mm  |
| B              | 80 mm   |
| C              | 375 mm  |
| D              | 505 mm  |
| D <sup>2</sup> | 1440 mm |
| E              | 130 mm  |
| F              | 235 mm  |
| G              | 235 mm  |

**Stroke:**  
80-375 mm



1.5 t



10.5 kg



- Very light aluminium jack
- Ideal for break-down service
- Short 2 piece handle bar
- Equipped with carrying handle
- Fast stroke: with 11 pump strokes up to the max. without load
- Saddle plate protection with rubber cover
- Lever with protective sponge to prevent scratches on car bodies



**Model**    **Part#**  
**RH201**    **8951000003**



|                |         |
|----------------|---------|
| Model          | RH201   |
| Capacity       | 2 t     |
| Weight         | 20.5 kg |
| Dimensions:    |         |
| A              | 375 mm  |
| B              | 85 mm   |
| C              | 460 mm  |
| D              | 695 mm  |
| D <sup>2</sup> | 1820 mm |
| E              | 155 mm  |
| F              | 285 mm  |
| G              | 320 mm  |

**Stroke:**  
85-460 mm



2 t



20.5 kg



- Very light aluminium jack
- Ideal for break-down service
- Short 2 piece handle bar
- For easy transport the jack is equipped with 3 carrying handles
- Fast stroke with double pump
- Saddle plate protection with rubber cover
- Lever with protective sponge to prevent scratches on car bodies



**Model**    **Part#**  
**RH290**    **8951082031**

|                |         |
|----------------|---------|
| Model          | RH290   |
| Capacity       | 3 t     |
| Weight         | 41.5 kg |
| Dimensions:    |         |
| A              | 365 mm  |
| B              | 145 mm  |
| C              | 490 mm  |
| D              | 650 mm  |
| D <sup>2</sup> | 1650 mm |
| E              | 160 mm  |
| F              | 275 mm  |
| G              | 350 mm  |

**Stroke:**  
145-490 mm



3 t



41.5 kg



- Small & compact trolley jack
- Pump lever can be disassembled (2 pieces)
- For easy storage and transport
- With foot pedal for fast approach






Model RH151  
Part# 8951000051

|                |         |
|----------------|---------|
| Model          | RH151   |
| Capacity       | 1.5 t   |
| Weight         | 50.5 kg |
| Dimensions:    |         |
| A              | 460 mm  |
| B              | 80 mm   |
| C              | 540 mm  |
| D              | 920 mm  |
| D <sup>2</sup> | 2140 mm |
| E              | 153 mm  |
| F              | 282 mm  |
| G              | 382 mm  |

Stroke: 80-540 mm



- Hydraulic trolley jack with sturdy steel construction
- Precise hand valve for lowering
- Smooth oil and acid resistant plastic wheels with foot pedal for fast approach
- Pump lever with protector sponge to prevent scratches
- Low profile jack with extra long body to get very deep under a vehicle up to 515 mm at a height of only 80 mm
- Compact when disassembled with 2 piece pump lever for easy transport and storage



Model RH251  
Part# 8951082024

|                |         |
|----------------|---------|
| Model          | RH251   |
| Capacity       | 2 t     |
| Weight         | 58 kg   |
| Dimensions:    |         |
| A              | 665 mm  |
| B              | 135 mm  |
| C              | 800 mm  |
| D              | 1340 mm |
| D <sup>2</sup> | 2100 mm |
| E              | 190 mm  |
| F              | 295 mm  |
| G              | 430 mm  |

Stroke: 135-800 mm



- Hydraulic trolley jack with sturdy steel construction
- Precise hand valve for lowering
- Smooth oil and acid resistant plastic wheels
- With foot pedal for fast approach
- High lifter up to 800 mm max.



Model RH215  
Part# 8951082026

|                |         |
|----------------|---------|
| Model          | RH215   |
| Capacity       | 2 t     |
| Weight         | 39.4 kg |
| Dimensions:    |         |
| A              | 430 mm  |
| B              | 75 mm   |
| C              | 505 mm  |
| D              | 750 mm  |
| D <sup>2</sup> | 1960 mm |
| E              | 150 mm  |
| F              | 270 mm  |
| G              | 375 mm  |


Stroke: 75



- Hydraulic trolley jack with sturdy steel construction
- Precise hand valve for lowering
- Smooth oil and acid resistant plastic wheels
- With foot pedal for fast approach
- Pump lever with protector sponge to prevent paint scratches
- Low profile and large final height (75-505 mm)
- Fast lifting stroke due to two pump pistons
- Long pedal for fast approach
- Compact when disassembled with 2 piece pump lever for easy transport and storage



HYDRAULIC TROLLEY JACKS

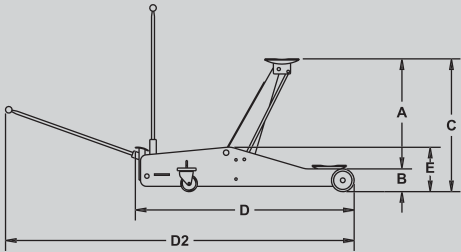


**Model**    **Part#**  
**RH315**    8951000063

|                |         |
|----------------|---------|
| Model          | RH315   |
| Capacity       | 3 t     |
| Weight         | 45 kg   |
| Dimensions:    |         |
| A              | 455 mm  |
| B              | 95 mm   |
| C              | 550 mm  |
| D              | 779 mm  |
| D <sup>2</sup> | 1979 mm |
| E              | 160 mm  |
| F              | 160 mm  |
| G              | 364 mm  |

**Stroke:**  
95-550 mm



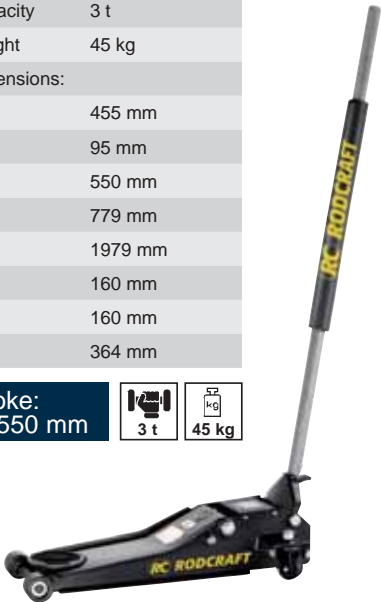

- Hydraulic trolley jack with sturdy steel construction
- Precise hand valve for lowering
- Smooth oil and acid resistant plastic wheels
- Long pedal for fast approach
- Pump lever with protector sponge to prevent paint scratches
- Fast lifting stroke due to two pump pistons
- Compact when disassembled with 2 pieces
- Pump lever for easy transport and storage



**Model**    **Part#**  
**RH301**    8951082032

|                |         |
|----------------|---------|
| Model          | RH301   |
| Capacity       | 3 t     |
| Weight         | 70 kg   |
| Dimensions:    |         |
| A              | 490 mm  |
| B              | 115 mm  |
| C              | 605 mm  |
| D              | 1320 mm |
| D <sup>2</sup> | 2440 mm |
| E              | 190 mm  |
| F              | 245 mm  |
| G              | 315 mm  |

**Stroke:**  
115-605 mm





- Hydraulic trolley jacks with sturdy steel construction for daily workshop use.
- With precise hand valve for lowering
- Equipped with smooth oil and acid resistant plastic wheels
- Long pedal for fast approach and quick lifting of smaller loads
- Pump lever with protector sponge to prevent paint scratches
- Pump lever with T-end for two-handed operation with valve on the lever top
- High lifter up to 800 mm max.

**Model**    **Part#**  
**RH501**    8951082050

|                |         |
|----------------|---------|
| Model          | RH501   |
| Capacity       | 5 t     |
| Weight         | 95 kg   |
| Dimensions:    |         |
| A              | 530 mm  |
| B              | 150 mm  |
| C              | 680 mm  |
| D              | 1420 mm |
| D <sup>2</sup> | 2560 mm |
| E              | 205 mm  |
| F              | 290 mm  |
| G              | 360 mm  |

**Stroke:**  
150-680 mm





- Hydraulic trolley jack for truck
- With foot pedal for fast approach
- Hydraulic system with pump lever allows autonomous operation without compressed air
- Easy to position due to foot rest on back (turning on the spot)
- Lever can be locked in 3 angles for storage and positioning deeply under a low vehicle
- Grease nipples on all important joints








Model RH310 Part# 8951082100

|             |         |
|-------------|---------|
| Model       | RH310   |
| Capacity    | 10 t    |
| Weight      | 123 kg  |
| Dimensions: |         |
| A           | 430 mm  |
| B           | 175 mm  |
| C           | 605 mm  |
| D           | 1600 mm |
| D²          | 2550 mm |
| E           | 270 mm  |
| F           | 380 mm  |
| G           | 410 mm  |

Stroke: 175-605 mm



- Hydraulic trolley jack for trucks
- With foot pedal for fast approach
- Hydraulic system with pump lever allows autonomous operation without compressed air
- With LCS lowering control system for slow descent even when heavily charged
- "Dead man control" auto-stop valve


# The all-rounders!



Model C225  
Rubber inlay  
Ø 137 mm (C 225) for RH290 Part#: 8951011092

RH215  
RH315





Model BC2-2S Part# 8951000177

|                |              |
|----------------|--------------|
| Model          | BC2-2S       |
| Capacity       | 2 t          |
| Weight         | 15 kg        |
| Dimensions:    |              |
| A - A max      | 115 - 350 mm |
| B              | 265 mm       |
| C              | 185 mm       |
| D              | 82 mm        |
| E              | 98 mm        |
| F              | 80 mm        |
| G              | - mm         |
| Stroke: 235 mm |              |



- From 115 to 430 mm within extension
- Highly resistant diaphragm and internal telescopic guide
- Overload safety valve
- On/Off ergonomic lever
- 115 mm in uninflated position
- Extension included: 80 mm height



Model BC2-2L Part# 8951000178



|                |              |
|----------------|--------------|
| Model          | BC2-2L       |
| Capacity       | 2 t          |
| Weight         | 18 kg        |
| Dimensions:    |              |
| A - A max      | 115 - 350 mm |
| B              | 265 mm       |
| C              | 185 mm       |
| D              | 82 mm        |
| E              | 98 mm        |
| F              | 80 mm        |
| G              | 1000 mm      |
| Stroke: 235 mm |              |



- From 115 to 430 mm within extension
- Highly resistant diaphragm and internal telescopic guide
- Overload safety valve
- On/Off ergonomic lever
- Adjustable handle and composite wheels
- 115 mm in uninflated position
- Extension included: 80 mm height

Model BC2-3L Part# 8951000179

|                |              |
|----------------|--------------|
| Model          | BC2-3L       |
| Capacity       | 2 t          |
| Weight         | 19 kg        |
| Dimensions:    |              |
| A - A max      | 200 - 500 mm |
| B              | 250 mm       |
| C              | 185 mm       |
| D              | 82 mm        |
| E              | 98 mm        |
| F              | 60 mm        |
| G              | 1000 mm      |
| Stroke: 300 mm |              |




- From 200 to 560 mm within extension
- Highly resistant diaphragm and internal telescopic guide
- Overload safety valve
- On/Off ergonomic lever
- Adjustable handle and composite
- 200 mm in uninflated position
- Extension included: 60 mm height

Accessories for BC2 serie

Model BC2-2S/2L  
80 mm extension Part#: 8950312038

Model BC2-3L  
60 mm extension Part#: 8950312081



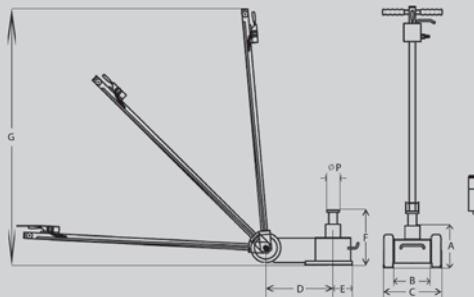



**Model**      **Part#**  
**LHH22**      8951084201  
**LHH35**      8951084350

|             |         |         |
|-------------|---------|---------|
| Model       | LHH22   | LHH35   |
| Capacity    | 20 t    | 32 t    |
| Weight      | 49 kg   | 54.4 kg |
| Dimensions: |         |         |
| A           | 210 mm  | 255 mm  |
| B           | 205 mm  | 250 mm  |
| C           | 320 mm  | 330 mm  |
| D           | 330 mm  | 510 mm  |
| D+E         | 430 mm  | 610 mm  |
| F           | 325 mm  | 368 mm  |
| G           | 1200 mm | 1200 mm |
| P           | 50 mm   | 50 mm   |

**Stroke:**  
LHH22: 210-435 mm  
LHH35: 255-488 mm



- Short and compact, very easy to manoeuvre
- Overload control and safety valve against undesired descent
- Piston is retracted by 4 springs
- Piston includes integrated threaded extension
- Front handle for easier carrying
- Including adapters: broad saddle with diameter 68 mm, height 20 mm.  
Diameter 48 mm, heights 20/60/100 mm
- Air supply pressure needs to be 7 - 10 bar
- Air consumption 300 l/min.
- According to EN 292

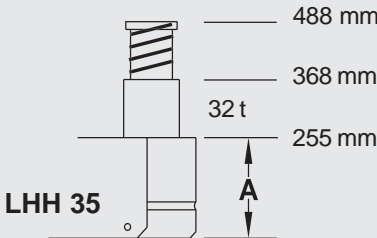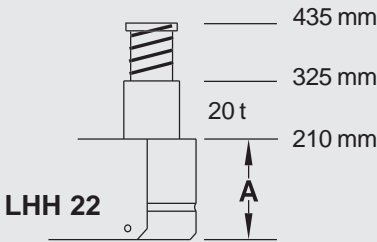


AIR-HYDRAULIC JACKS

Model Part#  
ATJ30-2 8951000269


|                             |            |
|-----------------------------|------------|
| Model                       | ATJ30-2    |
| Capacity                    | 30 / 15 t  |
| Max. height with extensions | 409 mm     |
| Net weight                  | 38 kg      |
| A                           | 150 mm     |
| B                           | 164 mm     |
| C                           | 260 mm     |
| D                           | 240 mm     |
| E                           | 86 mm      |
| D+E                         | 326 mm     |
| F                           | 223/289 mm |
| G                           | 1365 mm    |
| P                           | 71 mm      |

Capacity 30 t



- Ultra compact and light weight construction
- Maximum height: 409 mm
- Air powered piston
- Includes 2 extensions for higher lifting - Stored on handle for transport
- Piston and pump
- Anti dust seals
- Ideal for easily accessing lifting points on low chassis trucks and buses
- Convenient joystick controls
- Cylinder mounted carrying handle
- 1.3 m / long handle bar (1 piece handle) allows easy access to controls when fully positioned under vehicle
- Handle bar locks in 3 positions: 45°, 90° & 180°
- Large & soft rubber wheels


Max height 409 mm

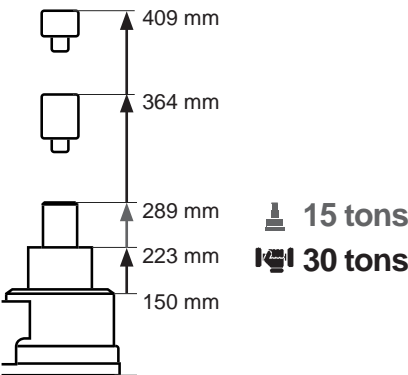

Model Part#  
ATJ50-3 8951000270


|                             |                |
|-----------------------------|----------------|
| Model                       | ATJ50-3        |
| Capacity                    | 50/25/15 t     |
| Max. height with extensions | 472 mm         |
| Net weight                  | 73 kg          |
| A                           | 160 mm         |
| B                           | 200 mm         |
| C                           | 282 mm         |
| D                           | 470 mm         |
| E                           | 85 mm          |
| D+E                         | 555 mm         |
| F                           | 222/283/352 mm |
| G                           | 1430 mm        |
| P                           | 71 mm          |

Capacity 50 t



- Large working range for all type of applications
- Maximum height: 472 mm
- Air powered piston
- Includes 2 extensions for higher lifting - Stored on handle for transport
- Piston and pump
- Anti dust seals
- Ideal for easily accessing lifting points on low chassis trucks and buses
- Convenient joystick controls
- Cylinder mounted carrying handle
- 1.3 m / long handle bar (1 piece handle) allows easy access to controls when fully positioned under vehicle
- Handle bar locks in 3 positions: 45°, 90° & 180°
- Large & soft rubber wheels


Max height 472 mm

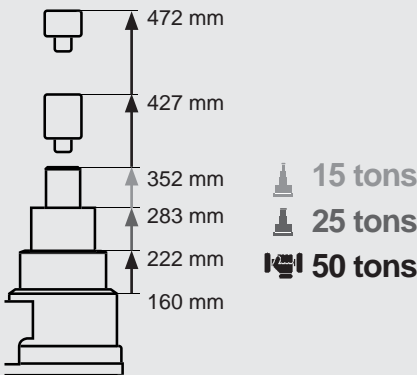

Model Part#  
ATJ80-2 8951000272


|                             |            |
|-----------------------------|------------|
| Model                       | ATJ80-2    |
| Capacity                    | 80/50 t    |
| Max. height with extensions | 563 mm     |
| Net weight                  | 106 kg     |
| A                           | 230 mm     |
| B                           | 254 mm     |
| C                           | 340 mm     |
| D                           | 415 mm     |
| E                           | 105 mm     |
| D+E                         | 520 mm     |
| F                           | 341/443 mm |
| G                           | 1610 mm    |
| P                           | 82 mm      |

Capacity 80 t



- Maximum height: 563 mm
- Air powered piston
- Includes 2 extensions for higher lifting - Stored on handle for transport
- Piston and pump
- Anti dust seals
- Ideal for easily accessing lifting points on low chassis trucks and buses
- Convenient joystick controls
- Cylinder mounted carrying handle
- 1.6 m / long handle bar (1 piece handle) allows easy access to controls when fully positioned under vehicle
- Handle bar locks in 3 positions: 45°, 90° & 180°
- Large & soft rubber wheels

Max height 563 mm

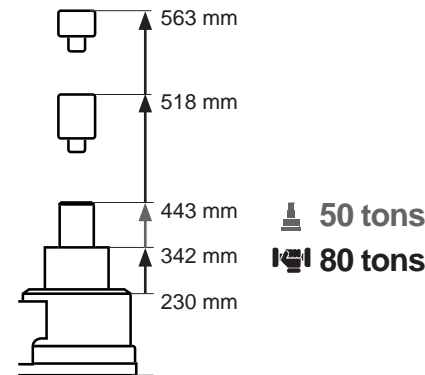

# Air-hydraulic Jacks

## 30 T, 50 T & 80 T capacity



### Easy to use:

- Controlled with a joy stick
- Swiveling inlet


### Easy to transport:

Carrying handle on the cylinder and large wheel in middle

**Fast lifting:**  
High pressure  
pneumatic pump

**High stability:**  
Large base

**Solid frame:**  
Large metal frame  
to protect inside  
components from shock

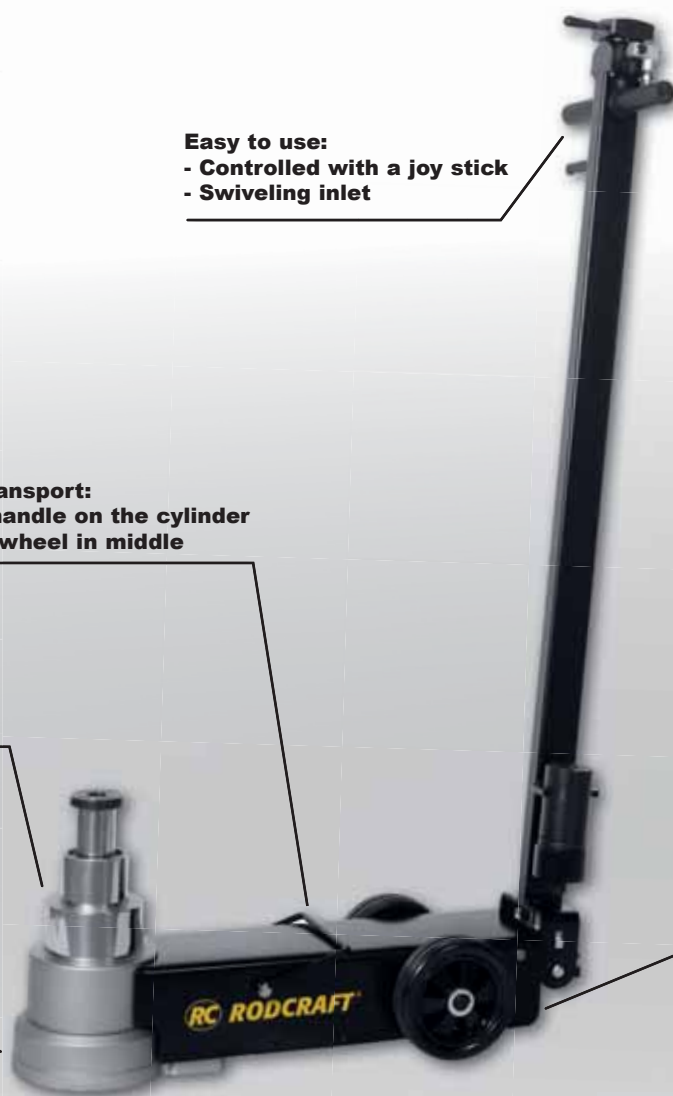


**ATJ30-2**  
**ATJ50-3**  
**ATJ80-2**

### Easy maneuvering:


- Long handle bar and control panel at the end of the grip allow the jack to be pushed far under the vehicle
- Handle bar locks in 3 positions: 45°, 90° & 180°
- Large & soft rubber wheels





# Bottle jacks 2t - 50t capacity

certified according to DIN 76024

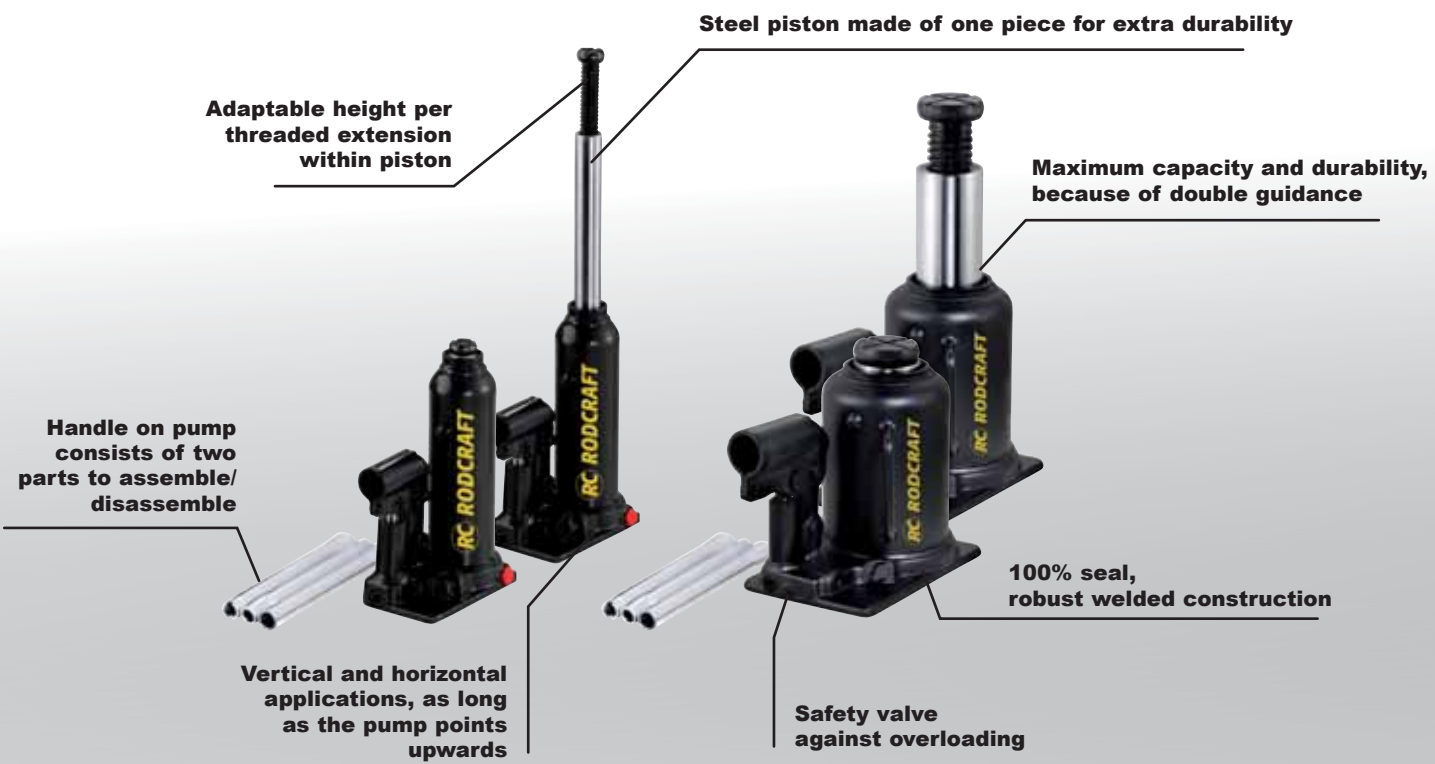

- Hydraulic system with mounted manual pump is powerful, compact, versatile
  - Maximum capacity and durability, because of double guidance
  - 100% seal due to robust welded construction
  - High stability, due to large base plate
  - Vertical and horizontal applications, as long as the pump points upwards
- Fast and easy adaptable height, per threaded extension within piston
  - With safety valve against overloading
  - Steel piston made of one piece for extra durability
  - Handle on pump consists of two parts to assemble/disassemble

| Model          | MGN2       | MGN3       | MGN5       | MGN8       | MGN12      | MGN12F     | MGN12L     | MGN20      | MGN20F     | MGN30      | MGN50L     |
|----------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| Part#          | 8951000009 | 8951000010 | 8951000011 | 8951000012 | 8951000013 | 8951000127 | 8951000128 | 8951000014 | 8951000129 | 8951000015 | 8951000130 |
| Capacity       | 2 t        | 3 t        | 5 t        | 8 t        | 12 t       | 12 t       | 12 t       | 20 t       | 20 t       | 30 t       | 50 t       |
| Weight         | 2.4 kg     | 2.9 kg     | 3.8 kg     | 5.8 kg     | 6.7 kg     | 9.5 kg     | 5.9 kg     | 9.1 kg     | 13 kg      | 18.3 kg    | 35.3       |
| Dimensions:    |            |            |            |            |            |            |            |            |            |            |            |
| A (min.)       | 178 mm     | 190 mm     | 198 mm     | 200 mm     | 176 mm     | 238 mm     | 155 mm     | 182 mm     | 275 mm     | 280 mm     | 300 mm     |
| A+B (max.)     | 305 mm     | 325 mm     | 340 mm     | 320 mm     | 275 mm     | 390 mm     | 225 mm     | 280 mm     | 445 mm     | 455 mm     | 480 mm     |
| C (+extension) | 52 mm      | 62 mm      | 70 mm      | 72 mm      | 76 mm      | 90 mm      | 45 mm      | 40 mm      | 70 mm      | -          | -          |
| D              | 347 mm     | 366 mm     | 390 mm     | 394 mm     | 347 mm     | 478 mm     | 270 mm     | 308 mm     | 514 mm     | 445 mm     | 482 mm     |
| E              | 120 mm     | 125 mm     | 140 mm     | 160 mm     | 175 mm     | 195 mm     | 140 mm     | 195 mm     | 205 mm     | 200 mm     | 220 mm     |
| F              | 80 mm      | 85 mm      | 90 mm      | 100 mm     | 120 mm     | 145 mm     | 105 mm     | 145 mm     | 140 mm     | 150 mm     | 175 mm     |
| G              | 20 mm      | 23 mm      | 29 mm      | 35 mm      | 43 mm      | 43 mm      | 43 mm      | 53 mm      | 53 mm      | 62 mm      | 65 mm      |

|        |            |
|--------|------------|
| Model  | Part#      |
| MGN12F | 8951000127 |
| MGN12L | 8951000128 |

|               |        |        |
|---------------|--------|--------|
| Model         | MGN12F | MGN12L |
| Capacity      | 12 t   | 12 t   |
| Weight        | 9.5 kg | 5.9 kg |
| Dimensions:   |        |        |
| A (min.)      | 238 mm | 155 mm |
| A+B (max.)    | 390 mm | 225 mm |
| C (extension) | 90 mm  | 45 mm  |
| D             | 478 mm | 270 mm |
| E             | 195 mm | 140 mm |
| F             | 145 mm | 105 mm |
| G             | 43 mm  | 43 mm  |

Height 480 mm & 270 mm




FAST AND LOW  
BOTTLE JACK

|        |            |
|--------|------------|
| Model  | Part#      |
| MGN20F | 8951000129 |

|               |        |
|---------------|--------|
| Model         | MGN20F |
| Capacity      | 20 t   |
| Weight        | 13 kg  |
| Dimensions:   |        |
| A (min.)      | 275 mm |
| A+B (max.)    | 445 mm |
| C (extension) | 70 mm  |
| D             | 514 mm |
| E             | 205 mm |
| F             | 140 mm |
| G             | 53 mm  |

Height 515 mm



12 t

|        |            |
|--------|------------|
| Model  | Part#      |
| MGN50L | 8951000130 |

|             |         |
|-------------|---------|
| Model       | MGN50L  |
| Capacity    | 50 t    |
| Weight      | 35.3 kg |
| Dimensions: |         |
| A (min.)    | 300 mm  |
| A+B (max.)  | 480 mm  |
| D           | 482 mm  |
| E           | 220 mm  |
| F           | 175 mm  |
| G           | 65 mm   |

Height 480 mm



- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20



# Jack stands 1.5t - 16t Capacity



- Welded, sturdy steel tube construction, strutted and easy to carry
- Good standing stability since each foot is equipped with a broad plate
- Steel pipe stem with models with threaded spindle, ergonomic steel tube stem for easier carrying on other jack stands with large bolt on chain and safety clamp.
- USBN5.0 finely adjustable with rubber protector on top, especially suited for vans and buses

Delivered in pairs



| Model               | USB1.5       | USB1.5H      | USB3       | USB5       | USBN5      | USB8       | USB8H      | USB12G     | USB12HG    | USB16H     |
|---------------------|--------------|--------------|------------|------------|------------|------------|------------|------------|------------|------------|
| Part#               | 8951000096   | 8951000097   | 8951000098 | 8951000099 | 8951000100 | 8951000101 | 8951000102 | 8951000103 | 8951000104 | 8951000106 |
| Capacity            | 1 1/2 ton(s) | 1 1/2 ton(s) | 3 t        | 5 t        | 5 t        | 8 t        | 8 t        | 12 t       | 12 t       | 16 t       |
| Weight              | 2.2 kg       | 3.6 kg       | 3.8 kg     | 5 kg       | 4.3 kg     | 7.9 kg     | 11.4 kg    | 10.6 kg    | 14.4 kg    | 19.5 kg    |
| min. height         | 260 mm       | 430 mm       | 320 mm     | 370 mm     | 245 mm     | 385 mm     | 580 mm     | 345 mm     | 475 mm     | 430 mm     |
| max. height         | 405 mm       | 700 mm       | 530 mm     | 580 mm     | 350 mm     | 600 mm     | 950 mm     | 515 mm     | 730 mm     | 725 mm     |
| Stroke              | 145 mm       | 270 mm       | 210 mm     | 210 mm     | 105 mm     | 215 mm     | 370 mm     | 170 mm     | 255 mm     | 295 mm     |
| Positions in height | 5 steps      | 5 steps      | 5 steps    | 5 steps    | Direct     | 5 steps    | 6 steps    | Direct     | Direct     | 5 steps    |



Jack stands  
2t - 6t Capacity



Self locking handle with composite tip

Rugged & welded steel frame construction

- High stability due to feet with extra large plate
- Self locking handle & locking pin increases safety
- Durable & resistant ductile iron support column & rugged steel frame construction
- Easy to operate : ratchet action for height adjustment

Delivered in pairs



| Model       | UBZ-2      | UBZ-3      | UBZ-6      |
|-------------|------------|------------|------------|
| Part#       | 8951000027 | 8951000028 | 8951000029 |
| Capacity    | 2 t        | 3 t        | 6 t        |
| Weight      | 2.5 kg     | 3 kg       | 5 kg       |
| min. height | 280 mm     | 300 mm     | 400 mm     |
| max. height | 425 mm     | 455 mm     | 620 mm     |
| Stroke      | 145 mm     | 155 mm     | 220 mm     |
| Positions   | 10 steps   | 11 steps   | 12 steps   |



|    |
|----|
| 01 |
| 02 |
| 03 |
| 04 |
| 05 |
| 06 |
| 07 |
| 08 |
| 09 |
| 10 |
| 11 |
| 12 |
| 13 |
| 14 |
| 15 |
| 16 |
| 17 |
| 18 |
| 19 |
| 20 |



**WK102K**

## 15| Motor

- | Workshop cranes
- | Motor stands
- | Motor repair bridge

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16



17

18

19

20

FOLDABLE CRANES



Model WK102K Part# 8951080101


Model WK1000 Part# 8951000166

|             |                |
|-------------|----------------|
| Model       | WK102K         |
| Capacity P1 | 1000 kg        |
| Capacity P2 | 750 kg         |
| Capacity P3 | 500 kg         |
| Capacity P4 | 250 kg         |
| Weight      | 77.5 kg        |
| A           | 1560 mm        |
| E           | 1920 mm        |
| G           | 2120 mm        |
| J           | 1480 mm        |
| K           | 825 mm         |
| L           | 935 mm         |
| M           | 160 mm         |
| P           | 430 mm         |
| S           | 440 mm         |
| R min.      | 960 mm         |
| R med.      | 1060 mm        |
| R max.      | 1160 / 1230 mm |


Foldable

|             |         |
|-------------|---------|
| Model       | WK1000  |
| Capacity P1 | 1000 kg |
| Capacity P2 | 750 kg  |
| Capacity P3 | 500 kg  |
| Capacity P4 | NA      |
| Weight      | 98.5 kg |
| A           | 1560 mm |
| E           | 2120 mm |
| G           | 2240 mm |
| J           | 1525 mm |
| K           | 780 mm  |
| L           | 981 mm  |
| M           | 90 mm   |
| P           | 480 mm  |
| S           | 460 mm  |
| R min.      | 1100 mm |
| R med.      | 1225 mm |
| R max.      | 1350 mm |

Strong and easy to use



- Additional small wheels for moving the crane also easily when folded up
- With oil and acid resistant wheels, the rear wheels swivel, the front wheels are fixed
- The lifting arm can be extended in 4 positions
- Oil and acid resistant wheels, the rear wheels swivel, the front wheels are fixed



- Double action pump system
- 200 ° Swiveling pump
- Safety release valve
- Ultralow profile legs (90mm)
- Foldable leg with safety pin and extra storage wheels
- Large handle and swiveling nylon wheels
- 3 arm position

# Fast lifting 1T crane

Large working range:  
From 0 mm to 2240

Double action pump  
Swiveling handle

Low profile leg: 90mm only



Foldable feet with extra  
storage wheels

**WK1000**

|    |
|----|
| 01 |
| 02 |
| 03 |
| 04 |
| 05 |
| 06 |
| 07 |
| 08 |
| 09 |
| 10 |
| 11 |
| 12 |
| 13 |
| 14 |
| 15 |
| 16 |
| 17 |
| 18 |
| 19 |
| 20 |



GHN600



## 16| Gear

| Transmission jacks

|           |
|-----------|
| 01        |
| 02        |
| 03        |
| 04        |
| 05        |
| 06        |
| 07        |
| 08        |
| 09        |
| 10        |
| 11        |
| 12        |
| 13        |
| 14        |
| 15        |
| <b>16</b> |
| 17        |
| 18        |
| 19        |
| 20        |




TRANSMISSION JACKS



**Model**    **Part#**  
**GHN300**   *8951000131*

|             |              |
|-------------|--------------|
| Model       | GHN300       |
| Capacity    | 300 kg       |
| min. height | 1180 mm      |
| max. height | 2010 mm      |
| Weight      | 30.6 kg      |
| A / B       | 560 / 590 mm |
| C           | 75 mm        |
| D           | 1180 mm      |
| E           | 2010 mm      |
| F           | 830 mm       |
| G           | 460 mm       |
| H           | 20 mm        |
| Oil volume  | 760 ml       |

Capacity 300 kg

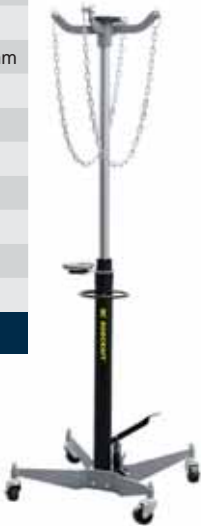

- Chromed cylinder in an oil bath
- Easy to position with round horizontal handle
- Large foot pedal for lifting without locking position
- Small foot pedal for lowering
- Automatic descent stop-pedal
- Safety valve against overloading
- Reversible crown to place drain pans
- Incl. 1,2 m length chain to fix load

**Model**    **Part#**  
**GHN600**   *8951000132*

|             |              |
|-------------|--------------|
| Model       | GHN600       |
| Capacity    | 600 kg       |
| min. height | 1180 mm      |
| max. height | 2000 mm      |
| Weight      | 38 kg        |
| A / B       | 560 / 590 mm |
| C           | 75 mm        |
| D           | 1180 mm      |
| E           | 2000 mm      |
| F           | 820 mm       |
| G           | 460 mm       |
| H           | 20 mm        |
| Oil volume  | 910 ml       |

Capacity 600 kg



- Chromed cylinder in an oil bath
- Easy to position with round horizontal handle
- Large foot pedal for lifting without locking position
- Small foot pedal for lowering
- Automatic descent stop-pedal
- Safety valve against overloading
- Reversible crown to place drain pans
- Incl. 1,2 m length chain to fix load

**Model**    **Part#**  
**GHN1000**   *8951000133*

|             |              |
|-------------|--------------|
| Model       | GHN1000      |
| Capacity    | 1000 kg      |
| min. height | 1180 mm      |
| max. height | 2010 mm      |
| Weight      | 50 kg        |
| A / B       | 560 / 590 mm |
| C           | 75 mm        |
| D           | 1180 mm      |
| E           | 2010 mm      |
| F           | 830 mm       |
| G           | 455.5 mm     |
| H           | 20 mm        |
| Oil volume  | 1320 ml      |

Capacity 1000 kg



- Chromed cylinder in an oil bath
- Easy to position with round horizontal handle
- Large foot pedal for lifting without locking position
- Small foot pedal for lowering
- Automatic descent stop-pedal
- Safety valve against overloading
- Reversible crown to place drain pans
- Incl. 1,2 m length chain to fix load



# Transmission Jacks

## 300-1000 Kg capacity

Anti-rust : chromed cylinder in an oil bath

Convenient & complete:  
Provided with a 1.2m length chain, a reversible claw with rubber pad and a magnetic tray

Round horizontal handle


High stability:  
Large & low clearance base

Hands-free operation :  
Large foot pedal for lifting without locking position and a small foot pedal for lowering

**GHN300**  
**600-1000**

01  
02  
03  
04  
05  
06  
07  
08  
09  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20

DRAIN PANS

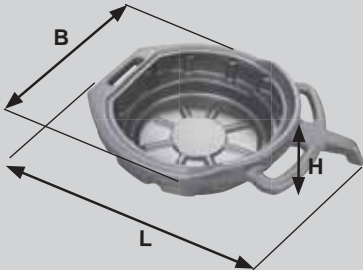

Model P2 Part# 8951000057

|             |        |
|-------------|--------|
| Model       | P2     |
| Capacity    | 8 l    |
| Weight      | 0,7 kg |
| Dimensions: |        |
| L           | 515 mm |
| B           | 390 mm |
| H           | 145 mm |

Capacity: max. 8 L



- 3 handles for carrying
- Anti-splash rim
- Made of oil and petrol resistant polyethylene (HDPE)



Model P46 Part# 8951000058

|             |         |
|-------------|---------|
| Model       | P46     |
| Capacity    | 16 l    |
| Weight      | 0,95 kg |
| Dimensions: |         |
| L           | 570 mm  |
| B           | 450 mm  |
| H           | 175 mm  |

Capacity: max. 16 L



- 3 handles for carrying
- Anti-splash rim
- Made of oil and petrol resistant polyethylene (HDPE)
- Compatible with GHN model's



Model P4 Part# 8951081032

|             |        |
|-------------|--------|
| Model       | P4     |
| Capacity    | 17 l   |
| Weight      | 2 kg   |
| Dimensions: |        |
| L           | 675 mm |
| B           | 380 mm |
| H           | 150 mm |

Capacity: max. 17 L



- 3 handles for carrying
- Closed version
- Made of oil and petrol resistant polyethylene (HDPE)

Model P50 Part# 8951000090


|             |        |
|-------------|--------|
| Model       | P50    |
| Capacity    | 43 l   |
| Weight      | 4.1    |
| Dimensions: |        |
| L           | 912 mm |
| B           | 495 mm |
| H           | 179 mm |

Capacity max: 43 L



- 3 handles for carrying
- Closed model
- Made of oil and petrol resistant polyethylene
- 2 wheels for easy transportation

# Quality tools for professionnals



- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20





HRS04



## 17| Car Body

- | Hydraulic ram sets
- | Pneumatic hydraulic pump
- | Hydraulic cylinders
- | Mobile hydraulic straightener
- | Pull clamps
- | Accessories

|    |
|----|
| 01 |
| 02 |
| 03 |
| 04 |
| 05 |
| 06 |
| 07 |
| 08 |
| 09 |
| 10 |
| 11 |
| 12 |
| 13 |
| 14 |
| 15 |
| 16 |
| 17 |
| 18 |
| 19 |
| 20 |

Model  
**HRS04**     Part#  
                  8951000124

|                     |         |
|---------------------|---------|
| Model               | HRS04   |
| Stroke cylinder     | 120 mm  |
| ø Cylinder          | 40 mm   |
| ø Cylinder          | 44 mm   |
| ø Piston            | 25 mm   |
| min. Length         | 268 mm  |
| max. Length         | 388 mm  |
| Oil volume Pump     | 0.4 l   |
| Oil volume Cylinder | 0,4 l   |
| max. Pressure       | 700 bar |
| 4 ton capacity      |         |

- Application: pushing - widening - clamping
- Easy assembly because of unthreaded connections
- 17 piece set in a plastic case for easy storage
- Each piece with its own moulded compartment to keep the set complete
- NO LOOSE STYROFOAM MOULDS
- Includes full set of accessories

Model  
**HRS10**     Part#  
                  8951000125

|                     |         |
|---------------------|---------|
| Model               | HRS10   |
| Stroke cylinder     | 130 mm  |
| ø Cylinder          | 56,5 mm |
| ø Cylinder          | 63 mm   |
| ø Piston            | 40 mm   |
| min. Length         | 320 mm  |
| max. Length         | 450 mm  |
| Oil volume Pump     | 0.5 l   |
| Oil volume Cylinder | 0,5 l   |
| max. Pressure       | 700 bar |
| 10 ton capacity     |         |

- Application: pushing - widening - clamping
- Easy assembly because of unthreaded connections
- 17 piece set in a plastic case for easy storage
- Each piece with its own moulded compartment to keep the set complete
- NO LOOSE STYROFOAM MOULDS
- Includes full set of accessories

HRS04 and HRS10 set



Accessories for HRS04/HRS10



**Pump**  
for  
**HRS04**     Part#  
**HRS10**     8950321713  
                  8950321748







**Hose 1.500 mm**  
for     Part#  
**HRS04**     8951011979  
**HRS10**




**Push ram 10 t**  
for     Part#  
**HRS04**     8950321714  
**HRS10**     8950321749



**Spreader 0,5 t**  
for     Part#  
**HRS04**     8950321715  
**HRS10**

| Model   | Part#      |
|---|------------|
| <b>Extension kit HRS04</b>  | 8950390020 |
| <b>Extension kit HRS10</b>  | 8950390035 |
|  | 400 mm     |
|  | 350 mm     |
|  | 250 mm     |
|  | 100 mm     |



**Tool box**  
for     Part#  
**HRS04**     8950390006  
**HRS10**     8950390022

| Model   | Part#                       |
|---|-----------------------------|
| <b>Connector kit HRS04</b>  | 8950390021                  |
| <b>Connector kit HRS10</b>  | 8950390036                  |
|  | Protection piece for piston |
|  | Plate                       |
|  | Prisma piece                |
|  | Wedge piece, sharp          |
|  | Push for piston             |
|  | Push for cylinder           |
|  | Rubber                      |



Model  
HRS20

Part#  
8951000126

|                     |         |
|---------------------|---------|
| Model               | HRS20   |
| Stroke cylinder     | 130 mm  |
| ø Cylinder          | 90 mm   |
| ø Piston            | 60 mm   |
| min. Length         | 280 mm  |
| max. Length         | 410 mm  |
| Oil volume Pump     | 0.9 l   |
| Oil volume Cylinder | 0,9 l   |
| max. Pressure       | 700 bar |

20 ton capacity

- Application: pushing - clamping
- All accessories in steel with threaded connections
- 2-step hand pump for 700 bar working pressure
- Stored in 2 durable metal boxes
- Including full set of accessories
- 130 mm stroke of hydraulic cylinder
- Hose length 1500 mm (pump/cylinder)



Accessories for HRS20



Pump, hydraulic 2-step  
Part#  
8950321755



Hose  
Part#  
8951011979

Model  
Connector kit HRS20

Part#  
8950390050



Lock pin



Connector male thread



Connector female thread



Plunger base



Extension



Toe lift



Wedge head



Saddle

Model  
Extension kit HRS20

Part#  
8950390049



700 mm



500 mm



250 mm



125 mm

Accessories for HRS04/HRS10/HRS20


Model  
PHP10

Part#  
8951000136



Pneumatic-hydraulic Pump.  
Adaptable with cylinders of HRS04 / HRS10 / HRS20  
Description see page 132


# PNEUMATIC-HYDRAULIC PUMP HYDRAULIC CYLINDER / PULL CLAMPS

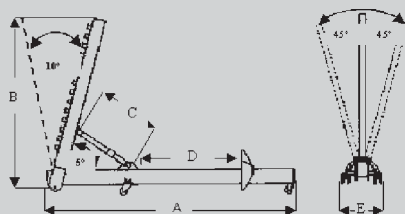

**Model** Part#  
**RGS100** 8951089054

**Model** Part#  
**PHP10** 8951000136

|                        |              |
|------------------------|--------------|
| Model                  | RGS100       |
| Dimensions:            |              |
| A                      | 2900 mm      |
| B                      | 1600 mm      |
| C                      | 600 - 700 mm |
| D                      | 0 - 1900 mm  |
| E                      | 720 mm       |
| Gradient               | 2 x 45°      |
| Weight                 | 230 kg       |
| <b>10 ton capacity</b> |              |

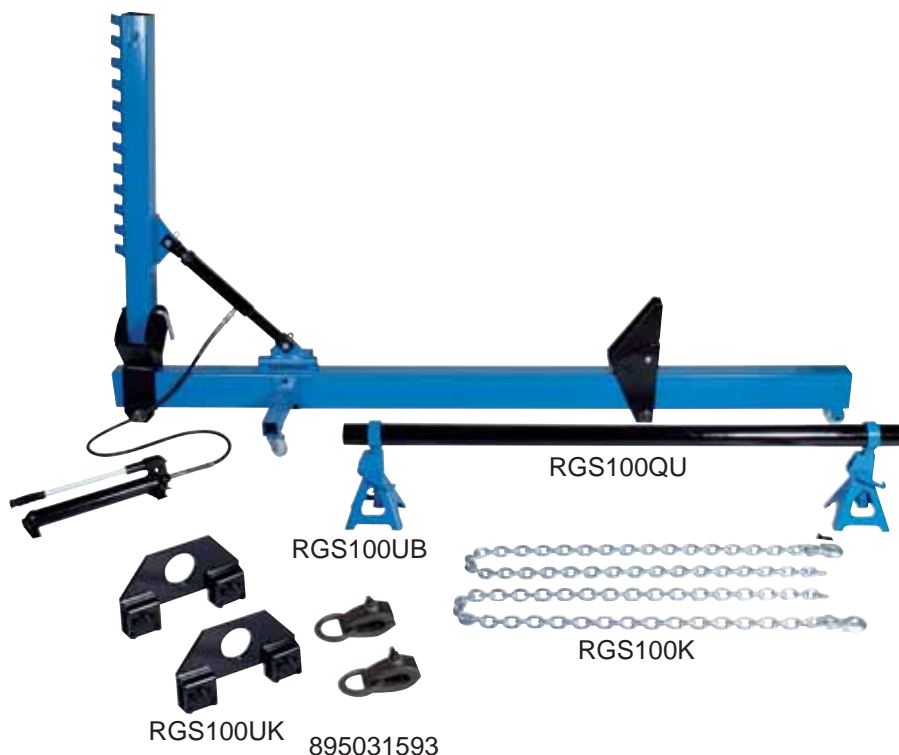

- Easy to move with oil and acid resistant plastic wheels
- Strong 8" 10 t hydraulic ram
- Pull arm can be tilted sideways 45°
- Precise control of pump serves smaller or even delicate straightening applications
- PHP10 is an ideal supplement for this tool that will save time and reduce the manual effort


## INCLUDES:

- 1x manual pump with high pressure hose (length 1.50 m)
- 2x chains, length of 1.50 m (model RGS100K-8951011083) with hook (model RGS100H-8951011082)
- 2x jack stands, adjustable in height (model RGS100UB - 8951011080)
- 2x body clamps, long type - hole diameter 75 mm (model RGS100UK - 8951011084)
- 1x supporting pipe length 1,80 m, diameter 74 mm (model RGS100QU - 8951011081)
- 2x universal pull clamps with ring (895031593)
- 1x counter support, complete (shark's fin)



Pneumatic-hydraulic Pump. Convenient and easy to handle, operation by hand or foot. 1-step silenced pump with high performance. Ideal in combination with rams like HRS04/ HRS 10/HPP10 and dozer RGS 100. Maximum hydraulic pressure 700 bar. Oil capacity 0.7 l, hydraulic high pressure hose length 1,5 m

**Model** Part#  
**HRZ** 8951000137

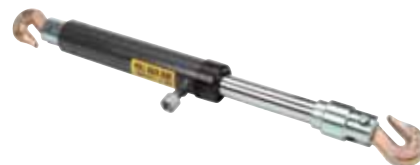

Pulling force 5 t. Stroke 156 mm. Thread on cylinder 1/4". Length maximum 665 mm (including hook)

**Model** Part#  
**HRD10F** 8951000138



Pushing force 10 t. Stroke 10 mm. Thread on cylinder 1/4". Adaptable with pumps PHP10

**Model** Part#  
**HRD10K** 8951000139



Pushing force 10 t. Hydraulic stroke 50 mm. Length minimum 130 mm. Thread on cylinder 1/4". Adaptable with pumps PHP10

Model 101 Part# 8951011064

|                |        |
|----------------|--------|
| Model          | 101    |
| Total length   | 225 mm |
| Total width    | 85 mm  |
| Total height   | 70 mm  |
| Height of grip | 22 mm  |
| Width of grip  | 40 mm  |
| Bolt/nut       | M16x70 |
| Weight         | 1,8 kg |

One pulling direction



Model 102NN Part# 8951011068

|                |         |
|----------------|---------|
| Model          | 102NN   |
| Total length   | 240 mm  |
| Total width    | 155 mm  |
| Total height   | 40 mm   |
| Height of grip | 15 mm   |
| Width of grip  | 35 mm   |
| Bolt/nut       | M14x110 |
| Weight         | 2,1 kg  |

Two pulling directions



Model 601N Part# 8951011073

|                |        |
|----------------|--------|
| Model          | 601N   |
| Total length   | 180 mm |
| Total width    | 120 mm |
| Total height   | 150 mm |
| Height of grip | 15 mm  |
| Width of grip  | 120 mm |
| Bolt/nut       | M14x68 |
| Weight         | 2,7 kg |

Two pulling directions



Model 101N Part# 8951011066

|                |        |
|----------------|--------|
| Model          | 101N   |
| Total length   | 220 mm |
| Total width    | 120 mm |
| Total height   | 45 mm  |
| Height of grip | 25 mm  |
| Width of grip  | 43 mm  |
| Bolt/nut       | M16x70 |
| Weight         | 1,8 kg |

Two pulling directions



Model 301 Part# 8951011069

|                |        |
|----------------|--------|
| Model          | 301    |
| Total length   | 260 mm |
| Total width    | 65 mm  |
| Total height   | 80 mm  |
| Height of grip | 25 mm  |
| Width of grip  | 30 mm  |
| Bolt/nut       | M14x68 |
| Weight         | 1,6 kg |

Quick chain hook



Model 901 Part# 8951011071

|                |        |
|----------------|--------|
| Model          | 901    |
| Total length   | 200 mm |
| Total width    | 65 mm  |
| Total height   | 65 mm  |
| Height of grip | -      |
| Width of grip  | -      |
| Bolt/nut       | -      |
| Weight         | 1,3 kg |

Chain shortener



Model 102 Part# 8951011065

|                |         |
|----------------|---------|
| Model          | 102     |
| Total length   | 240 mm  |
| Total width    | 125 mm  |
| Total height   | 45 mm   |
| Height of grip | 15 mm   |
| Width of grip  | 35 mm   |
| Bolt/nut       | M14x120 |
| Weight         | 2,0 kg  |

One pulling direction



Model 402 Part# 8951011070

|                |        |
|----------------|--------|
| Model          | 402    |
| Total length   | 180 mm |
| Total width    | 180 mm |
| Total height   | 45 mm  |
| Height of grip | 15 mm  |
| Width of grip  | 45 mm  |
| Bolt/nut       | -      |
| Weight         | 2,4 kg |

One pulling direction



Model 101/101N 8951011076  
601/601N 8951011074  
102 8951011077  
102N/102NN 8951011078

Screw Kits



Model 102N Part# 8951011067

|                |         |
|----------------|---------|
| Model          | 102N    |
| Total length   | 230 mm  |
| Total width    | 90 mm   |
| Total height   | 35 mm   |
| Height of grip | 15 mm   |
| Width of grip  | 35 mm   |
| Bolt/nut       | M14x110 |
| Weight         | 2,0 kg  |

One pulling direction




Model 601 Part# 8951011072

|                |        |
|----------------|--------|
| Model          | 601    |
| Total length   | 180 mm |
| Total width    | 120 mm |
| Total height   | 70 mm  |
| Height of grip | 15 mm  |
| Width of grip  | 120 mm |
| Bolt/nut       | M14x68 |
| Weight         | 2,3 kg |

One pulling direction



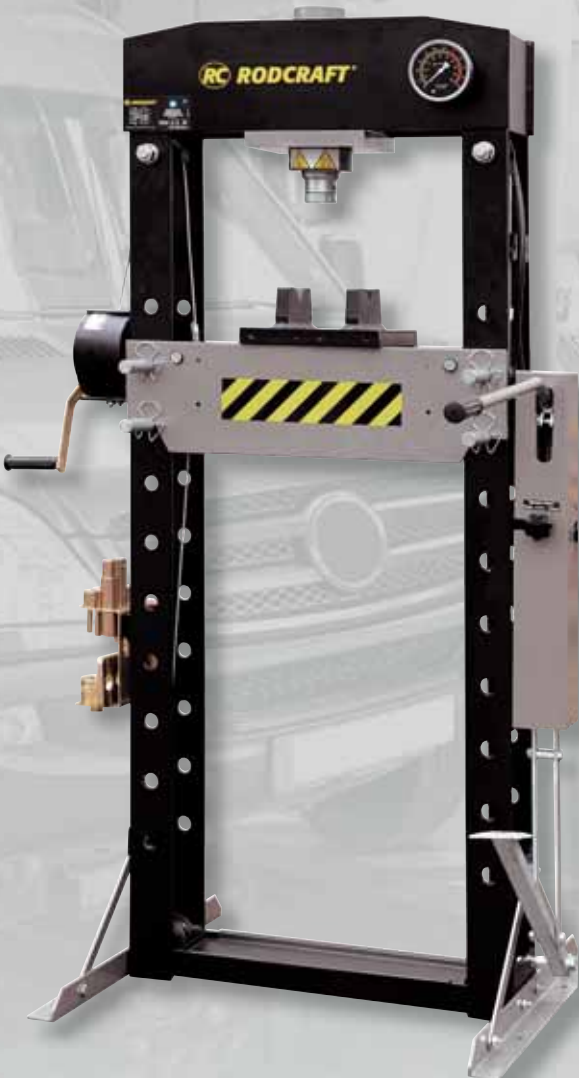


**WP30P**

## 18| Workshop presses

- | Workshop presses
- | Accessories

|           |
|-----------|
| 01        |
| 02        |
| 03        |
| 04        |
| 05        |
| 06        |
| 07        |
| 08        |
| 09        |
| 10        |
| 11        |
| 12        |
| 13        |
| 14        |
| 15        |
| 16        |
| 17        |
| <b>18</b> |
| 19        |
| 20        |

WORKSHOP PRESSES




**Model**    **Part#**  
**WP15**    8951000064



|                              |         |
|------------------------------|---------|
| Model                        | WP15    |
| Capacity                     | 15 t    |
| Max. Width A                 | 700 mm  |
| max. Length B                | 540 mm  |
| max. Height C                | 882 mm  |
| Width inside frame E         | 500 mm  |
| Distance inside frame F      | 120 mm  |
| Distance over table F 1 min. | 157 mm  |
| Distance over table F 2 max. | 457 mm  |
| Hydraulic stroke R           | 160 mm  |
| Oil volume                   | 0.6 l   |
| Weight                       | 75.5 kg |

2 stage hydraulic



- Professional workshop press with welded frame
- Manual hydraulic pump with ergonomic handle
- 2-speed pump that can be manually switched
- Easy-to-read large gauge
- For pressing on smaller diameters (like bushings and bearings) we offer a press bolt set from our accessory range that fits this press and contains various press bolts, a quick chuck and a punch plate

**Model**    **Part#**  
**WP20S**    8951000065



|                              |         |
|------------------------------|---------|
| Model                        | WP20S   |
| Capacity                     | 20 t    |
| Max. Width A                 | 740 mm  |
| Max. Length B                | 700 mm  |
| Max. Height C                | 1772 mm |
| Width inside frame E         | 510 mm  |
| Distance inside frame F      | 132 mm  |
| Distance over table F 1 min. | 185 mm  |
| Distance over table F 2 max. | 1175 mm |
| Hydraulic stroke R           | 186 mm  |
| Oil volume                   | 0.95 l  |
| Weight                       | 105 kg  |

2 stage hydraulic



- Workshop press for applications that can be done while standing
- Especially useful for larger work pieces
- Robust, welded frame
- Automatic 2-speed hydraulic pump with sturdy lever in ergonomic position for powerful pressing
- For pressing on smaller diameters (like bushings and bearings) we offer a press bolt set from our accessory range that fits this press and contains various press bolts, a quick chuck and a punch plate

**Model**    **Part#**  
**WP30P**    8951000071



|                              |         |
|------------------------------|---------|
| Model                        | WP30P   |
| Capacity                     | 30 t    |
| max. Width A                 | 795 mm  |
| max. Length B                | 700 mm  |
| max. Height C                | 1772 mm |
| Width inside frame E         | 535 mm  |
| Distance inside frame F      | 140 mm  |
| Distance over table F 1 min. | 151 mm  |
| Distance over table F 2 max. | 1031 mm |
| Hydraulic stroke R           | 160 mm  |
| Oil volume                   | 1.1 l   |
| Weight                       | 167 kg  |

Foot pump



- Workshop press with extra wide robust, welded frame
- For one person operation
- Cylinder can be shifted sideways for versatile applications
- 2-speed pump that can be switched manually for fast approach and powerful pressing
- Includes a set of press bolts with quick change chuck (see DS8)
- Adjust the press table easily with the help of the suspending cables and the central winch




Model  
WP50P

Part#  
8951000072

RODCRAFT  
Premium


|                              |         |
|------------------------------|---------|
| Model                        | WP50P   |
| Capacity                     | 50 t    |
| max. Width A                 | 1030 mm |
| max. Length B                | 800 mm  |
| max. Height C                | 1830 mm |
| Width inside frame E         | 730 mm  |
| Distance inside frame F      | 207 mm  |
| Distance over table F 1 min. | 68 mm   |
| Distance over table F 2 max. | 1048 mm |
| Hydraulic stroke R           | 200 mm  |
| Oil volume                   | 2.5 l   |
| Weight                       | 298 kg  |

Foot pump



- Workshop press with extra wide robust, welded frame
- For one person operation
- Cylinder can be shifted sideways for versatile applications
- 2-speed pump that can be switched manually for fast approach and powerful pressing
- Includes a set of press bolts with quick change chuck (see DS8)
- Adjust the press table easily with the help of the suspending cables and the central winch

# Comfortable 30 t or 50 t presses

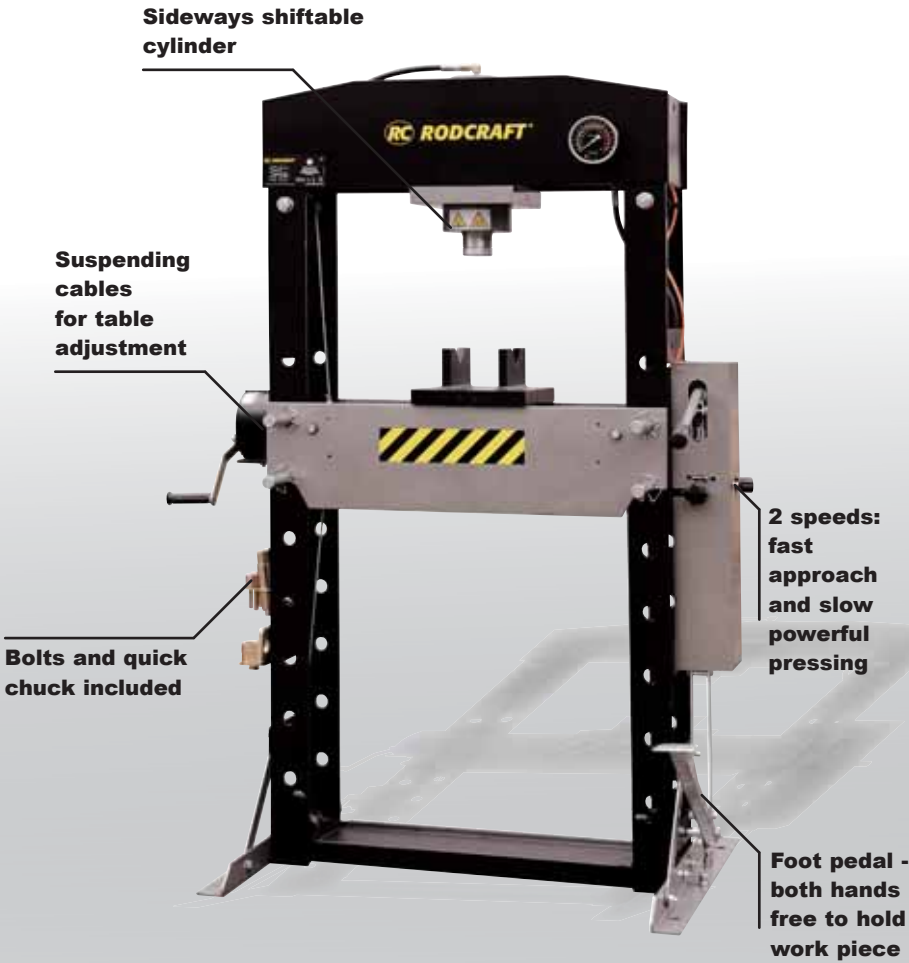

### Accessories

Model  
DS8

Part#  
8955000050



- Press bolt set with punch plate and quick chuck
- Fits the pistons of all presses shown here
- The quick chuck allows the fast exchange of press bolts to adapt the diameter of the press bolt to various applications
- Already included with models WP30P and WP50P

Model  
Punch plate

Part#  
8955000049




Model  
Quick change

Part#  
8955000039




|             |            |
|-------------|------------|
| Model       | Part#      |
| Punch 10 mm | 8955000048 |
| Punch 12 mm | 8955000047 |
| Punch 16 mm | 8955000042 |
| Punch 18 mm | 8955000041 |
| Punch 20 mm | 8955000043 |
| Punch 22 mm | 8955000044 |
| Punch 25 mm | 8955000045 |
| Punch 30 mm | 8955000046 |




Model WP75P Part# 8951000170 

|                              |         |
|------------------------------|---------|
| Model                        | WP75P   |
| Capacity                     | 75 t    |
| max. Width A                 | 1140 mm |
| max. Length B                | 800 mm  |
| max. Height C                | 1840 mm |
| Width inside frame E         | 800 mm  |
| Distance inside frame F      | 245 mm  |
| Distance over table F 1 min. | 170 mm  |
| Distance over table F 2 max. | 884 mm  |
| Hydraulic stroke R           | 250 mm  |
| Oil volume                   | 4.5 l   |
| Weight                       | 498 kg  |

2 stage hydraulic




- Workshop press with extra wide robust, welded frame
- For one person operation
- Cylinder can be shifted sideways for versatile applications
- 2-speed pump that can be switched manually for fast approach and powerful pressing
- Includes a set of press bolts with quick change chuck (see DS8)
- Adjust the press table easily with the help of the suspending cables and the central winch

Model WP100P Part# 8951000171 

|                              |         |
|------------------------------|---------|
| Model                        | WP100P  |
| Capacity                     | 100 t   |
| max. Width A                 | 1200 mm |
| max. Length B                | 990 mm  |
| max. Height C                | 1830 mm |
| Width inside frame E         | 787 mm  |
| Distance inside frame F      | 300 mm  |
| Distance over table F 1 min. | 114 mm  |
| Distance over table F 2 max. | 814 mm  |
| Hydraulic stroke R           | 300 mm  |
| Oil volume                   | 5.6 l   |
| Weight                       | 766 kg  |

2 stage hydraulic



- Hydro-pneumatic pump
- Powered lift of the piston
- Robust welded frame
- For one person operation
- Movable cylinder with winch
- 2-speed pump that can be switched manually - for fast approach and powerful pressing
- Includes a set of press bolts with quick change chuck (see DS8)
- Adjust the press table easily with the help of the suspending cables and the central winch

# Durable and easy to use

**Convenient**

Winch to manipulate the cylinder and the table

**Versatile**

Delivered with a quick chuck and 8 punches

**Precision**

**Fast & Easy Work**

Pneumatic pump driven by foot



**WP100P**

|    |
|----|
| 01 |
| 02 |
| 03 |
| 04 |
| 05 |
| 06 |
| 07 |
| 08 |
| 09 |
| 10 |
| 11 |
| 12 |
| 13 |
| 14 |
| 15 |
| 16 |
| 17 |
| 18 |
| 19 |
| 20 |

**RWH703**

19| Wheel Dolly

| Wheel Dolly

|           |
|-----------|
| 01        |
| 02        |
| 03        |
| 04        |
| 05        |
| 06        |
| 07        |
| 08        |
| 09        |
| 10        |
| 11        |
| 12        |
| 13        |
| 14        |
| 15        |
| 16        |
| 17        |
| 18        |
| <b>19</b> |
| 20        |

Model Part#  
**RG600** 8951089045

Max. width 300 mm



600 kg 18 kg

- Easy positioning of cars
- Moving in all directions
- Simple to use with foot pedal
- The wheel is lowered when turning the valve
- Knob - robust hydraulic system instead of high maintenance mechanical mechanism (no regreasing of gears etc.)
- For tyres up to a width of 300 mm and a diameter of 650 mm



Model Part#  
**RHW1** 8951089091

Adjustable 290-620 mm



250 kg 14.3 kg

- Assembly aid for various types of wheels
- Adjustable arms for various wheel sizes (width 29 – 62 cm)
- Equipped with rollers for easy positioning of wheels onto the vehicle's stud bolts or holes in the brake disk
- With stop rollers on the rear side that avoid pushing the wheel onto the frame
- Ergonomic handle with rounded and soft grip
- Handle length adjustable (3 positions)
- Max. capacity 250 kg



Model Part#  
**RHW703** 8951000168

Adjustable 545-1280 mm



700 kg 115 kg

- Application: quick and easy disassembly and assembly of truck wheels and wheel sets, with or without brake drum
- Easy loading and transport to or from the lathe, tyre mounting machine or axle
- 2 swivel front wheels and 2 fixed rear wheels facilitate moving and precise positioning of the lift in order to avoid damage to axle bolts (no more tapping for repair of bolts needed)
- Saves time and contributes to safety and worker's health (spine)
- Practical foot pedal for lowering the lifted wheels (dead man auto-stop valve)
- Sturdy chassis made of square steel bars with max. capacity 700 kg
- Retaining arms can be adjusted sideways for small wheels as well as wheel sets
- Each loaded wheel rests stable and can still be turned individually when loaded because of 2 broad chromed rollers on each retaining arm
- Oil and acid resistant heavy duty wheels with large diameter
- Partly foldable and legs can be taken off for storage an easier transport in service cars
- The asymmetrically installed hydraulic unit on one side offers enough space to get access to the wheel hub and bolts even for 1" impact wrenches etc.
- Hydraulic construction for less maintenance in contrast to chain/roller construction



Model Part#  
RHW120 8951000169

Adjustable 1000-2200 mm



- Application: quick and easy disassembly and assembly of truck wheels and wheel sets, with or without brake drum
- Easy loading and transport to or from the lathe, tyre mounting machine or axle
- 2 swivel front wheels and 4 fixed rear wheels facilitate moving



## Strong and easy to use

Single pump to open and close the arms

3D-move adjustable arm

Large roller with auto-adjustment to the wheel

Tyre dimension from 1000 to 2200mm

**RHW120**

01  
02  
03  
04  
05  
06  
07  
08  
09  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20



**RSF01**



## 20| Various

- | Torque Wrench
- | Creeper
- | Brake fluid tester
- | Start-boosters
- | Work light

|    |
|----|
| 01 |
| 02 |
| 03 |
| 04 |
| 05 |
| 06 |
| 07 |
| 08 |
| 09 |
| 10 |
| 11 |
| 12 |
| 13 |
| 14 |
| 15 |
| 16 |
| 17 |
| 18 |
| 19 |
| 20 |

Model     Part#  
**DMS030**    8951000091

|                   |            |
|-------------------|------------|
| Model             | DMS030     |
| Square Drive      | 1/4"       |
| Capacity          | 5 – 25 N.m |
| Graduation        | 0,1 N.m    |
| Length            | 245 mm     |
| Weight            | 1.28 kg    |
| 1/4" - 5 – 25 N.m |            |



- Scale in Nm
- Torque adjustment with manual locking in front of the handle
- Fine scale graduation: 0.1 Nm
- Sensitive & sound signals when reaches the torque
- Provided with ISO 6789 calibration certificate
- Provided in a protective blow molded case
- Numbered wrenches

Model     Part#  
**DMS060**    8951000092

|                     |              |
|---------------------|--------------|
| Model               | DMS060       |
| Square Drive        | 3/8"         |
| Capacity            | 20 – 100 N.m |
| Graduation          | 0,5 N.m      |
| Length              | 410 mm       |
| Weight              | 1.5 kg       |
| 3/8" - 20 – 100 N.m |              |



- Scale in Nm
- Torque adjustment with manual locking in front of the handle
- Fine scale graduation: 0.5 Nm
- Sensitive & sound signals when reaches the torque
- Provided with ISO 6789 calibration certificate
- Provided in a protective blow molded case
- Numbered wrenches

Model     Part#  
**DMS200**    8951000093

|                     |              |
|---------------------|--------------|
| Model               | DMS200       |
| Square Drive        | 1/2"         |
| Capacity            | 40 – 200 N.m |
| Graduation          | 1 N.m        |
| Length              | 520 mm       |
| Weight              | 2.02 kg      |
| 1/2" - 40 – 200 N.m |              |



- Scale in Nm
- Torque adjustment with manual locking in front of the handle
- Fine scale graduation: 1 Nm
- Sensitive & sound signals when reaches the torque
- Provided with ISO 6789 calibration certificate
- Provided in a protective blow molded case
- Numbered wrenches



Model     Part#  
**DMS400**   8951000094

|                      |               |
|----------------------|---------------|
| Model                | DMS400        |
| Square Drive         | 3/4"          |
| Capacity             | 150 – 750 N.m |
| Graduation           | 5 N.m         |
| Length               | 1060 mm       |
| Weight               | 5.84 kg       |
| 3/4" - 150 – 750 N.m |               |



- Scale in Nm
- Torque adjustment with manual locking in front of the handle
- Fine scale graduation: 5 Nm
- Sensitive & sound signals when reaches the torque
- Provided with ISO 6789 calibration certificate
- Provided in a protective blow molded case
- Numbered wrenches

Model     Part#  
**DMS1000**   8951000095

|                     |                |
|---------------------|----------------|
| Model               | DMS1000        |
| Square Drive        | 1"             |
| Capacity            | 200 – 1000 N.m |
| Graduation          | 5 N.m          |
| Length              | 1255 mm        |
| Weight              | 6.84 kg        |
| 1" - 200 – 1000 N.m |                |



- Scale in Nm
- Torque adjustment with manual locking in front of the handle
- Fine scale graduation: 5 Nm
- Sensitive & sound signals when reaches the torque
- Provided with ISO 6789 calibration certificate
- Provided in a protective blow molded case
- Numbered wrenches

DMS030 - 1/4"




DMS060 - 3/8"



DMS200 - 1/2"



DMS400 - 3/4"



DMS1000 - 1"



Model     Part#  
**RSF01**    8951089021

|                          |          |
|--------------------------|----------|
| Model                    | RSF01    |
| Sitting height           | 480 mm   |
| min. height              | 150 mm   |
| Length                   | 1.250 mm |
| Width                    | 450 mm   |
| Weight                   | 14 kg    |
| Ergonomic sitting height |          |



- Creeper - chair in one, for various working heights
- Ergonomic design especially for tiring work
- Folding mechanism with safety lock against unintended folding
- Easy and stable to move on seven large
- Wheels diameter 63 mm oil and acid resistant
- Comfortably upholstered and covered with easy to clean surfaces
- Head rest adjustable in 3 positions
- Storage area for tools, sockets, light (upholstery at feet can be folded up)
- Capacity 90 kg



Model     Part#  
**RSF02**    8951089020

|                    |          |
|--------------------|----------|
| Model              | RSF02    |
| Min. height        | 115 mm   |
| Length             | 1.005 mm |
| Width              | 480 mm   |
| Weight             | 4,8 kg   |
| Weight 4,8 kg only |          |



- Solid creeper construction made of plastic
- Extra low area at arms for more freedom
- Upholstered head rest
- Two easy to reach storage areas for parts and tools
- 6 large oil resistant wheels for noise and vibration reduced moving
- Capacity 90 kg

CREEPER/BRAKE TESTER/  
WORK LIGHT  
START-BOOSTER

| Model | Part#      |
|-------|------------|
| RC250 | 8956001300 |
| RC500 | 8956001301 |

| Model                              | RC250              | RC500              |
|------------------------------------|--------------------|--------------------|
| Capacity                           | 250 F              | 500 F              |
| Starting current (amps peak)       | 8000 A.p.          | 9000 A.p.          |
| Starting current (amps continuous) | 1300 A             | 1800 A             |
| Weight                             | 19.4 kg            | 21.4 kg            |
| Polarity Inversion Alarm           | yes                | yes                |
| Test Unit                          | yes                | yes                |
| Charge on Sector                   | yes                | yes                |
| Charge on car plug                 | no                 | no                 |
| Charge on Engine                   | yes                | yes                |
| Cable cross section                | 50 mm <sup>2</sup> | 50 mm <sup>2</sup> |
| Cable length                       | 1.1 m              | 1.1 m              |

Ultracapacitor technology

- Ultracapacitor
- Buzzer to prevent polarity inversion and fuse to protect booster and car
- 30 seconds on running engine
- 6 hour with DC adaptor included
- Large copper clamps
- Lightweight and comfortable large handle
- Batteryless with 1 Million cycles life time : 5 years warranty
- Easy reading capacitor charge information with LED light
- Cable reel plus clamp holder for better storage - 63 in. / 110 cm length cable for better access
- All type of engines powered by 12V

| Model | Part#      |
|-------|------------|
| BFT02 | 8951089032 |

| Model  | BFT02  |
|--------|--------|
| Length | 130 mm |
| Width  | 20 mm  |
| Weight | 20 g   |

Brake Fluid Tester



- Easy to operation: 3 modes according to the water % in the brake fluid.
- Supplied with 1 battery

Capacitor technology

500F ultracapacitor 9000A power for any 12V motor

Buzzer and fuse to protect both booster and car

FAST charging  
30 seconds on running engine  
DC adaptor also included



1 Million cycles life time  
5-year warranty

RC500

| Model   | Part#      | Page    | LwA<br>(dB(A)) | k<br>(m/s²) | Model     | Part#      | Page | LwA<br>(dB(A)) | k<br>(m/s²) | Model    | Part#      | Page | LwA<br>(dB(A)) | k<br>(m/s²) |
|---------|------------|---------|----------------|-------------|-----------|------------|------|----------------|-------------|----------|------------|------|----------------|-------------|
| 7905    | 8951000016 | 74      |                |             | P46       | 8951000058 | 126  |                |             | RC3700   | 8951078074 | 21   | 90.2           | 1.63        |
| 7910    | 8951089014 | 74      |                |             | P50       | 8951000090 | 126  |                |             | RC4100   | 8951073000 | 30   | 97.7           | 1.7         |
| AGS185  | 8951089055 | 83      |                |             | PHP10     | 8951000136 | 132  |                |             | RC4105   | 8951073001 | 30   | 82.3           | 1.7         |
| ATJ30-2 | 8951000269 | 112     |                |             | RC2003    | 8951000195 | 10   | 103            | 1           | RC4107   | 8951073011 | 30   | 92.3           | 1.7         |
| ATJ50-3 | 8951000270 | 112     |                |             | RC2077    | 8951000117 | 10   | 98.6           | 0.9         | RC4500   | 8951073021 | 31   | 104            | 1.7         |
| ATJ80-2 | 8951000272 | 112     |                |             | RC2077K   | 8951000145 | 10   | 98.6           | 0.9         | RC4550   | 8951073031 | 32   | 103            | 1.7         |
| BC2-2L  | 8951000178 | 110     |                |             | RC2101    | 8951000196 | 10   | 103            | 1           | RC4607   | 8951073090 | 31   | 92.3           | 1.7         |
| BC2-2S  | 8951000177 | 110     |                |             | RC2177    | 8951000043 | 11   | 101            | 2.5         | RC4650   | 8951073050 | 32   | 101            | 1.7         |
| BC2-3L  | 8951000179 | 110     |                |             | RC2202    | 8951000123 | 11   | 106            | 4.4         | RC4700   | 8951073002 | 26   | 99.6           |             |
| BFT02   | 8951089032 | 149     |                |             | RC2205    | 8951000085 | 11   | 98.4           | 1.2         | RC4760   | 8951073012 | 26   | 99.7           |             |
| DMS030  | 8951000091 | 146     |                |             | RC2235    | 8951000286 | 12   | 108            | 4.8         | RC4784   | 8951073023 | 26   | 91.3           |             |
| DMS060  | 8951000092 | 146     |                |             | RC2257    | 8951000037 | 12   | 104            | 2.3         | RC500    | 8956001301 | 149  |                |             |
| DMS200  | 8951000093 | 146     |                |             | RC2267    | 8951000044 | 11   | 104            | 2           | RC5100   | 8951071022 | 36   | 94.8           | 1.9         |
| DMS400  | 8951000094 | 147     |                |             | RC2277    | 8951000025 | 12   | 104            | 2.6         | RC5120   | 8951171013 | 36   | 94.8           | 1.9         |
| DMS1000 | 8951000095 | 147     |                |             | RC2315    | 8951077130 | 14   | 102            | 1.5         | RC5150   | 8951171023 | 36   | 94.8           | 1.9         |
| GHN300  | 8951000131 | 124     |                |             | RC2377    | 8951000045 | 14   | 107.8          | 6.7         | RC5160   | 8951171033 | 36   | 94.8           | 1.9         |
| GHN600  | 8951000132 | 124     |                |             | RC2387    | 8951000074 | 14   | 107.8          | 6.7         | RC5176   | 8951171043 | 38   | 97.3           | 0.9         |
| GHN1000 | 8951000133 | 124     |                |             | RC2405    | 8951000075 | 15   | 107.8          | 6.7         | RC5185   | 8951000152 | 37   | 102            | 1.2         |
| HRD10F  | 8951000138 | 132     |                |             | RC2425    | 8951077190 | 15   | 109            | 2           | RC5195   | 8951000154 | 37   | 102            | 1.5         |
| HRD10K  | 8951000139 | 132     |                |             | RC2426    | 8951077032 | 15   | 107            |             | RC5305   | 8951071065 | 38   | 98.8           | 1.2         |
| HRS04   | 8951000124 | 130     |                |             | RC2437-XI | 8951000068 | 15   | 111.8          | 2.7         | RC5310   | 8951171053 | 39   | 98.8           | 1           |
| HRS10   | 8951000125 | 130     |                |             | RC2444    | 8951077210 | 16   | 115            | 1.4         | RC5400   | 8951071076 | 39   | 99             | 1.9         |
| HRS20   | 8951000126 | 131     |                |             | RC2447-XI | 8951000069 | 15   | 111.8          | 2.7         | RC5610   | 8951076001 | 44   | 89.5           | 2.2         |
| HRZ     | 8951000137 | 132     |                |             | RC2457Xi  | 8951000135 | 16   | 117            | 3.8         | RC5615   | 8951076002 | 44   | 88.1           | 1.6         |
| LHH22   | 8951084201 | 111     |                |             | RC2466    | 8951000047 | 16   | 111            | 1.6         | RC5620   | 8951076003 | 44   | 97.6           | 1.9         |
| LHH35   | 8951084350 | 111     |                |             | RC2476    | 8951000048 | 16   | 111            | 1.9         | RC5625   | 8951076004 | 45   | 94             | 3           |
| MGN2    | 8951000009 | 114     |                |             | RC2477Xi  | 8951000046 | 16   | 117            | 3.8         | RC6050   | 8951079001 | 50   | 90.9           | 2.09        |
| MGN3    | 8951000010 | 114     |                |             | RC250     | 8956001300 | 149  |                |             | RC6067   | 8951079011 | 50   | 90.9           | 1.36        |
| MGN5    | 8951000011 | 114     |                |             | RC2530    | 8951077260 | 17   | 108            | 1.9         | RC6100   | 8951076008 | 49   | 103            | 2.29        |
| MGN8    | 8951000012 | 114     |                |             | RC3000    | 8951078012 | 18   | 89.6           | 1.9         | RC6210   | 8951076009 | 48   | 98.2           | 1.8         |
| MGN12   | 8951000013 | 114     |                |             | RC3001    | 8951078022 | 18   | 84             | 1.53        | RC6212   | 8951076020 | 48   | 98.2           | 1.8         |
| MGN12F  | 8951000127 | 114-115 |                |             | RC3005    | 8951078042 | 19   | 89.6           | 2.02        | RC6220   | 8951076010 | 48   | 76.2           | 0.7         |
| MGN12L  | 8951000128 | 114-115 |                |             | RC3010    | 8951078013 | 19   | 89.6           | 2.07        | RC6301   | 8951076011 | 49   | 81.6           | 0.88        |
| MGN20   | 8951000014 | 114     |                |             | RC3060    | 8951078062 | 18   | 80.9           | 1.81        | RC6453   | 8951076013 | 49   | 99.8           | 0.72        |
| MGN20F  | 8951000129 | 114-115 |                |             | RC3100    | 8951078004 | 20   | 89.7           | 2.39        | RC6605RE | 8951074005 | 82   | 90.8           | 1.02        |
| MGN30   | 8951000015 | 114     |                |             | RC3200    | 8951078023 | 20   | 89.7           | 1.46        | RC6610   | 8951074000 | 82   | 97.9           | 1.02        |
| MGN50L  | 8951000130 | 114-115 |                |             | RC3260    | 8951078033 | 19   | 80.9           | 2.15        | RC6700   | 8951074001 | 54   | 97.5           | 0.8         |
| P2      | 8951000057 | 126     |                |             | RC3600    | 8951078034 | 20   | 85.6           | 2.68        | RC6710   | 8951074002 | 54   | 75.1           | 0.9         |
| P4      | 8951081032 | 126     |                |             | RC3607    | 8951078114 | 21   | 85.6           | 1.85        | RC6715   | 8951074003 | 54   | 88.3           | 0.7         |

| Model    | Part#      | Page | LwA<br>(dB(A)) | k<br>(m/s <sup>2</sup> ) | Model       | Part#      | Page | LwA<br>(dB(A)) | k<br>(m/s <sup>2</sup> ) | Model   | Part#      | Page | LwA<br>(dB(A)) | k<br>(m/s <sup>2</sup> ) |
|----------|------------|------|----------------|--------------------------|-------------|------------|------|----------------|--------------------------|---------|------------|------|----------------|--------------------------|
| RC6718XI | 8951074008 | 55   | 87.2           | 0.7                      | RC7702V6    | 8951000021 | 72   | 90.5           | 1.5                      | RH215   | 8951082026 | 107  |                |                          |
| RC6720   | 8951074004 | 55   | 77.2           | 0.8                      | RC7705V6    | 8951000020 | 72   | 97.1           | 1.2                      | RH251   | 8951082024 | 107  |                |                          |
| RC6900   | 8951075000 | 50   | 95.5           | 1.49                     | RC7705V6-2H | 8951000081 | 72   |                | 2.3                      | RH290   | 8951082031 | 106  |                |                          |
| RC7009   | 8951000274 | 58   | 96.7           | 0.75                     | RC7710V6    | 8951000070 | 72   | 90.1           | 2.3                      | RH301   | 8951082032 | 108  |                |                          |
| RC7028   | 8951000275 | 60   | 96.2           | 0.66                     | RC7710V6-2H | 8951000082 | 72   |                | 2.3                      | RH310   | 8951082100 | 109  |                |                          |
| RC7038   | 8951000328 | 62   | 97             | 0.7                      | RC8000      | 8951070000 | 95   |                |                          | RH315   | 8951000063 | 108  |                |                          |
| RC7048   | 8951000276 | 60   | 96.7           | 0.79                     | RC8010      | 8951070030 | 94   |                |                          | RH501   | 8951082050 | 108  |                |                          |
| RC7051   | 8951000165 | 58   | 82             |                          | RC8011      | 8951070040 | 94   |                |                          | RHW1    | 8951089091 | 142  |                |                          |
| RC7058   | 8951000278 | 58   | 103.7          | 0.61                     | RC8035      | 8951070050 | 95   |                |                          | RHW120  | 8951000169 | 143  |                |                          |
| RC7068   | 8951000329 | 62   | 107.1          | 0.8                      | RC8102-14   | 8951070002 | 86   |                |                          | RHW703  | 8951000168 | 142  |                |                          |
| RC7072RE | 8951075270 | 66   | 85.8           |                          | RC8103-08   | 8951070012 | 86   |                |                          | RSF01   | 8951089021 | 148  |                |                          |
| RC7077RE | 8951075310 | 66   | 85             |                          | RC8106-13   | 8951070011 | 86   |                |                          | RSF02   | 8951089020 | 148  |                |                          |
| RC7075RE | 8951075290 | 66   | 85.1           |                          | RC8107-14   | 8951070021 | 87   |                |                          | STS70K  | 8951089056 | 83   |                |                          |
| RC7091   | 8951176010 | 64   |                |                          | RC8112      | 8951070003 | 91   |                |                          | STS71K  | 8951011087 | 83   |                |                          |
| RC7120   | 8951072001 | 67   | 102            | 0.8                      | RC8113      | 8951070023 | 91   |                |                          | UBZ-2   | 8951000027 | 117  |                |                          |
| RC7128   | 8951000277 | 60   | 95.8           | 0.82                     | RC8115      | 8951070034 | 95   |                |                          | UBZ-3   | 8951000028 | 117  |                |                          |
| RC7130   | 8951072004 | 78   | 98.9           | 1.2                      | RC8116      | 8951070004 | 91   |                |                          | UBZ-6   | 8951000029 | 117  |                |                          |
| RC7150   | 8951072021 | 67   | 82             |                          | RC8118      | 8951011018 | 96   |                |                          | USB1.5  | 8951000096 | 116  |                |                          |
| RC7155   | 8951072041 | 69   | 90.5           | 0.7                      | RC8120      | 8951070014 | 92   |                |                          | USB1.5H | 8951000097 | 116  |                |                          |
| RC7156   | 8951072051 | 69   | 94.2           | 0.7                      | RC8132      | 8951000059 | 96   |                |                          | USB3    | 8951000098 | 116  |                |                          |
| RC7160   | 8951075021 | 68   | 96.2           | 0.95                     | RC8141      | 8951070090 | 96   |                |                          | USB5    | 8951000099 | 116  |                |                          |
| RC7166   | 8951075051 | 68   | 96.6           | 1.06                     | RC8150      | 8951012204 | 100  |                |                          | USB8    | 8951000101 | 116  |                |                          |
| RC7170   | 8951000144 | 69   | 97             | 1.3                      | RC8150F     | 8951012205 | 100  |                |                          | USB8H   | 8951000102 | 116  |                |                          |
| RC7171   | 8951000210 | 68   | 95             | 1.9                      | RC8150K     | 8951012206 | 100  |                |                          | USB12G  | 8951000103 | 116  |                |                          |
| RC7172   | 8951000211 | 68   | 95             | 3.5                      | RC8240      | 8955000026 | 92   |                |                          | USB12HG | 8951000104 | 116  |                |                          |
| RC7173   | 8951000212 | 68   | 95             | 2.4                      | RC8240S     | 8955000009 | 93   |                |                          | USB16H  | 8951000106 | 116  |                |                          |
| RC7190   | 8951075101 | 68   | 101            | 0.84                     | RC8241      | 8955000010 | 93   |                |                          | USBN5   | 8951000100 | 116  |                |                          |
| RC7200V  | 8951072111 | 70   | 97.2           | 1.3                      | RC8241S     | 8955000011 | 93   |                |                          |         | 8951000166 | 120  |                |                          |
| RC7500   | 8951072101 | 73   | 91.1           | 2.6                      | RC8500      | 8951011022 | 94   |                |                          | WK102K  | 8951080101 | 120  |                |                          |
| RC7661V  | 8951072231 | 70   | 98             | 1.5                      | RC8502      | 8951011024 | 94   |                |                          | WP15    | 8951000064 | 136  |                |                          |
| RC7681K  | 8951000019 | 67   | 85.6           | 1.2                      | RC8502N     | 8951012217 | 94   |                |                          | WP20S   | 8951000065 | 136  |                |                          |
| RC7682   | 8951000005 | 70   | 90.6           | 3                        | RF02G       | 8951011019 | 90   |                |                          | WP30P   | 8951000071 | 136  |                |                          |
| RC7682K  | 8951000018 | 70   | 90.6           | 3                        | RFP03DG     | 8951011020 | 90   |                |                          | WP50P   | 8951000072 | 137  |                |                          |
| RC7683   | 8951000004 | 78   | 89.5           | 1.2                      | RFP04G      | 8951012306 | 90   |                |                          | WP75P   | 8951000170 | 138  |                |                          |
| RC7683K  | 8951000017 | 78   | 89.5           | 1.2                      | RG600       | 8951089045 | 142  |                |                          | WP100P  | 8951000171 | 138  |                |                          |
| RC7684   | 8951000115 | 62   | 91.1           | 1.58                     | RGS100      | 8951089054 | 132  |                |                          |         |            |      |                |                          |
| RC7684RE | 8951000118 | 62   | 91.1           | 1.58                     | RH135       | 8951082025 | 106  |                |                          |         |            |      |                |                          |
| RC7686RE | 8951000119 | 62   | 91.1           | 1.58                     | RH151       | 8951000051 | 107  |                |                          |         |            |      |                |                          |
| RC7691V  | 8951072212 | 72   | 98.6           | 1.5                      | RH201       | 8951000003 | 106  |                |                          |         |            |      |                |                          |



[illegible]

[illegible]

## This image shows a single sheet of white paper with horizontal blue ruling lines. The lines are evenly spaced and run across the width of the page. There are no vertical margin lines or other markings present. The paper appears to be a standard sheet of notebook paper.





[www.linkedin.com/company/rodcraft](https://www.linkedin.com/company/rodcraft)

Visit [www.rodcraft.com](http://www.rodcraft.com) for more product information  
or contact your local distributor:

**Techtomat Kft.**

8500 Pápa, Vásár u. 11/a

[info@techtomat.hu](mailto:info@techtomat.hu)

+36302014931